


Engineering Design Day Presentation

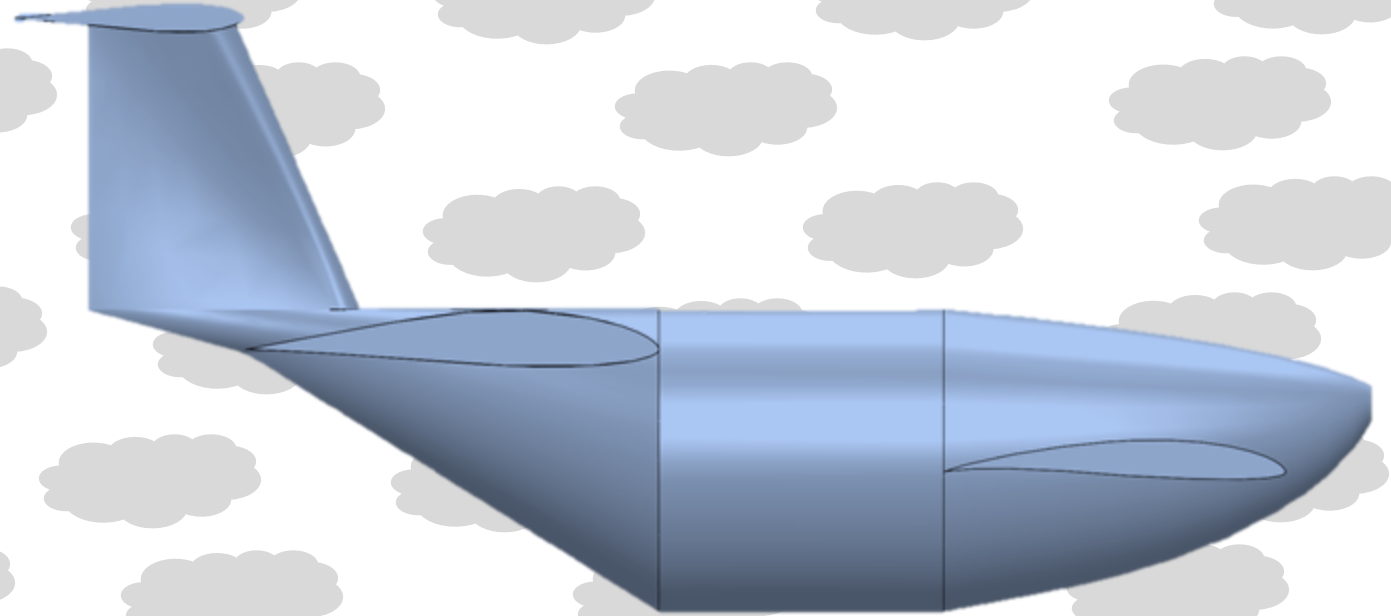

Team Introductions-507

Aerodynamics & Propulsion Team

Sasindu Pinto:
Project /Aeronautics/Propulsion Engineer



Noah Wright:
Aerodynamics Engineer



Michenell Louis-Charles:
Thermal Fluids Engineer/Financial Chair



Cameron Riley:
Materials/Hardware Engineer



Adrian Moya:
Systems/Hardware Engineer



Lauren Chin

**Lift and Control Surface
Engineer/Meeting Coordinator**



Joseph Figari

**Fuselage and Payload
Engineer/Financial Chair**



Jacob Pifer

**Project Engineer (Geometrics)
and Manufacturing Engineer**



Noah Wright

Sponsor and Advisors



Florida Space Grant Consortium:
Funding Sponsor




Seminole RC Club:
Equipment/Personnel Sponsor



Dr. Chiang Shih:
Professor & AME Center Director Advisor

Noah Wright

Project Background



- Plane designed to be entered in SAE Aero Design Competition East
- Only participating in the Design Knowledge Event and not the Validation Event due to financial constraints and health risks

Noah Wright




Team Objective

The objective of the aero-propulsion team is to ensure that the plane takes off, completes the flight path, and lands safely while carrying a payload.

Noah Wright


Key Goals and Assumptions

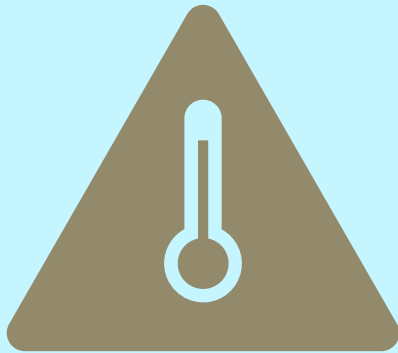


- Achieve lift
- Overcome drag
- Avoid stall
- Will be flown in atmospheric conditions at sea level

Noah Wright

Key Definitions


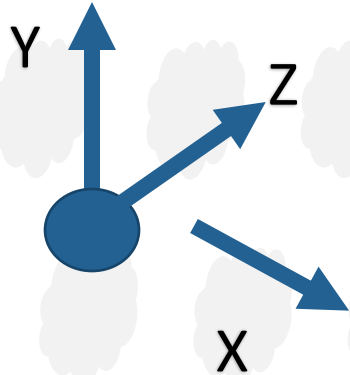


Coefficient of Lift

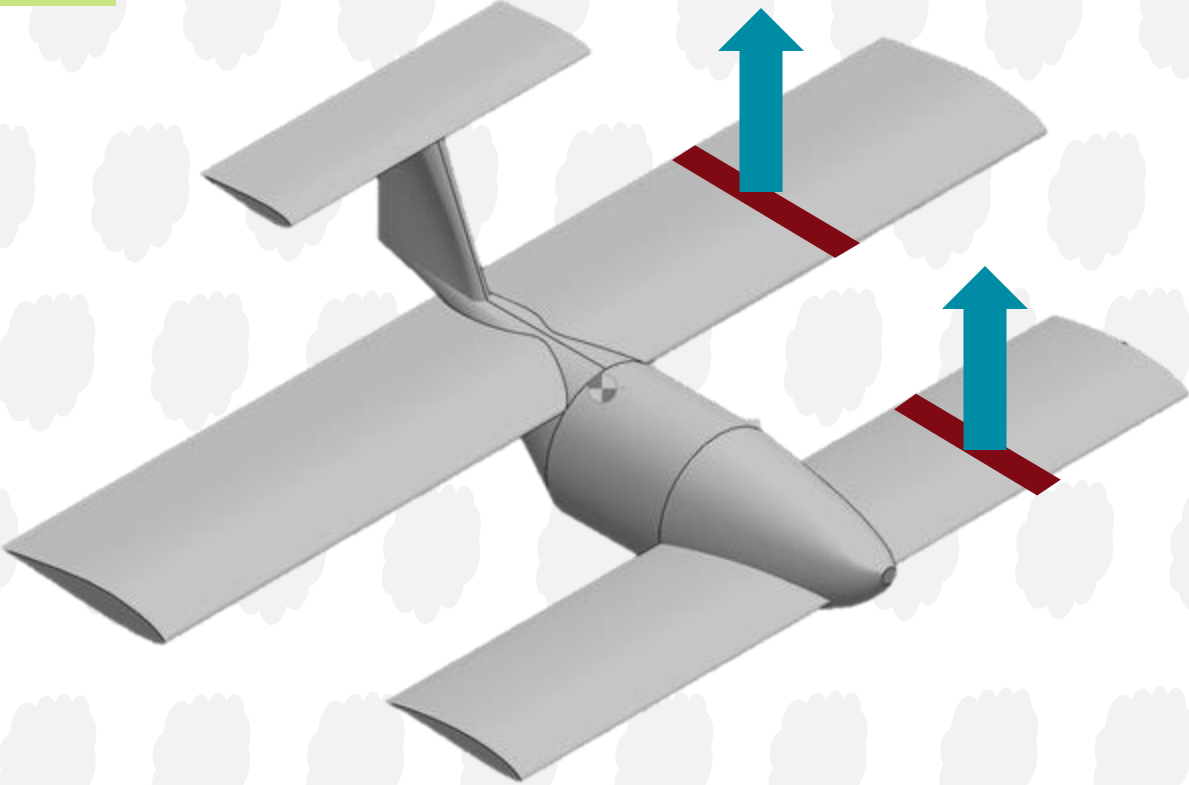


Noah Wright

Key Definitions

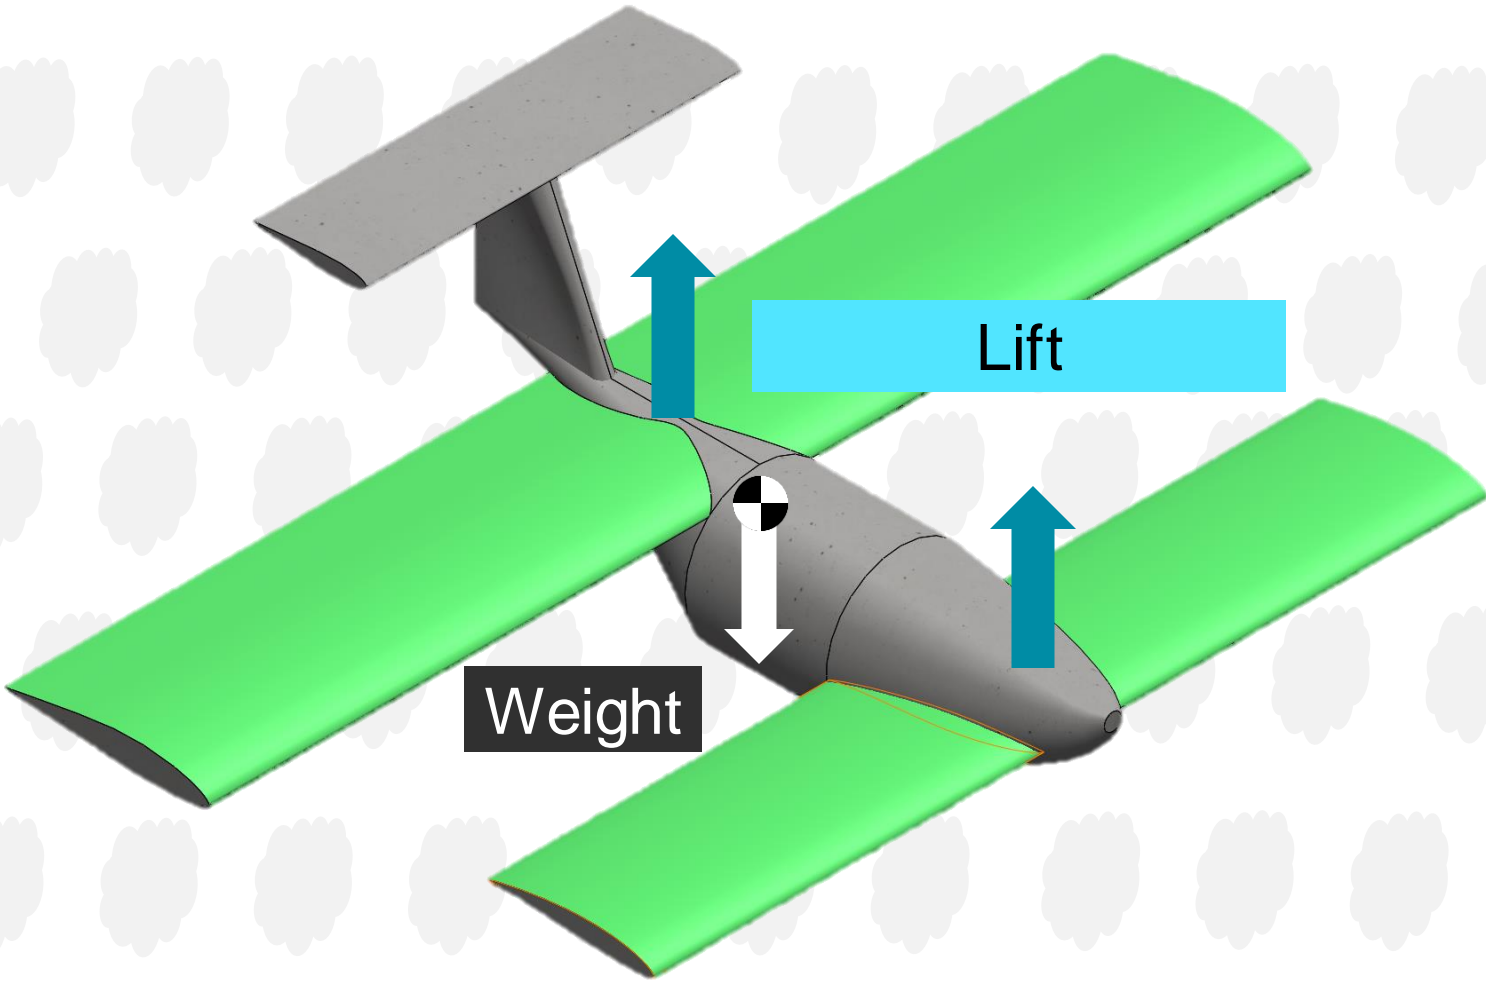


Noah Wright

Key Definitions


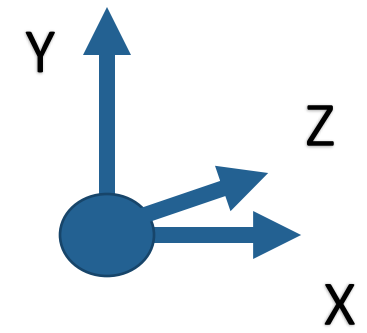


Coefficient of Drag

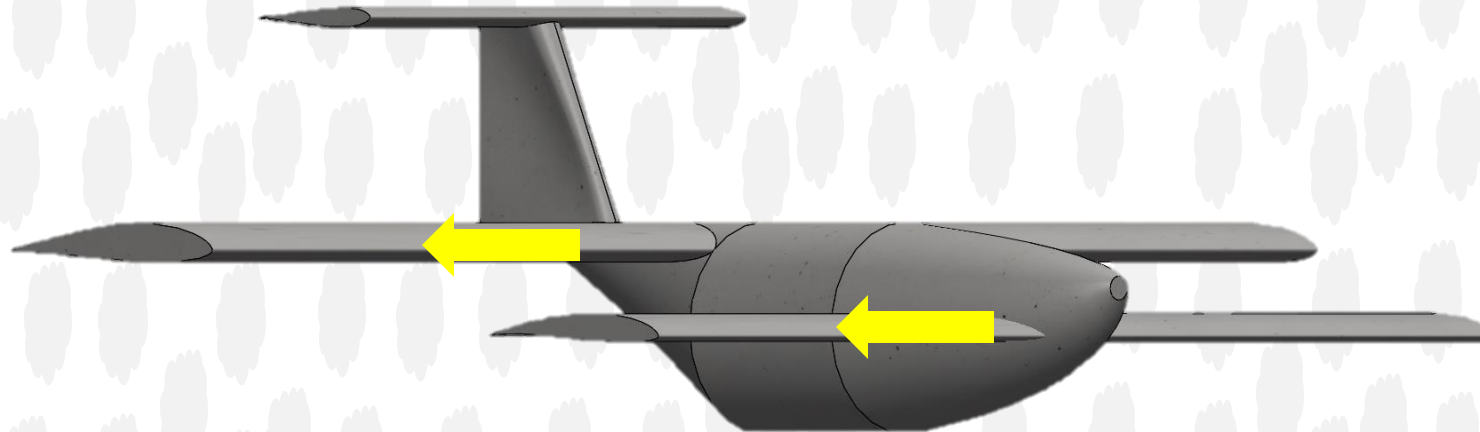

Noah Wright



Key Definitions

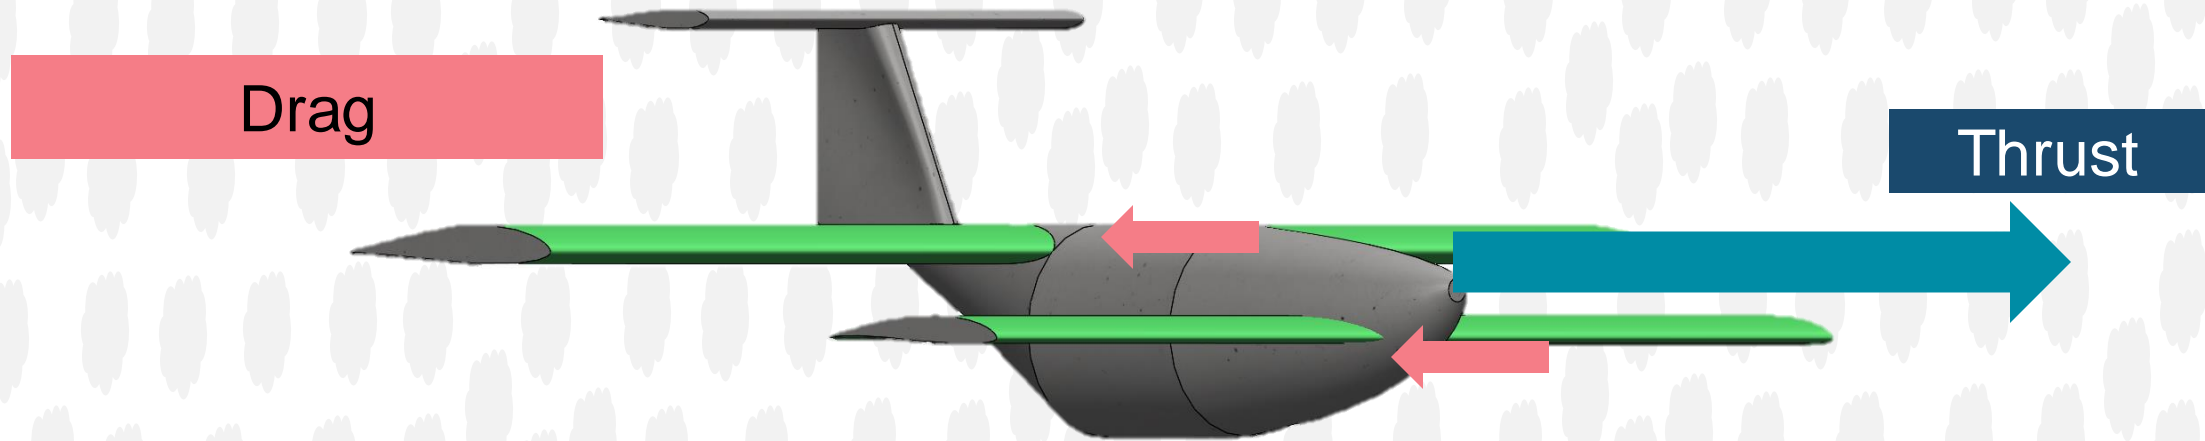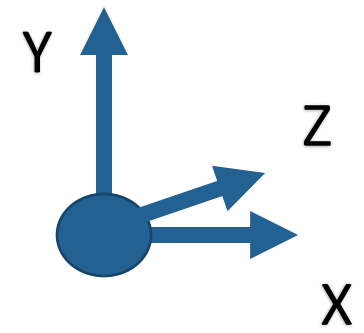

Noah Wright

Key Definitions


Angle of Attack (AoA / Alpha)

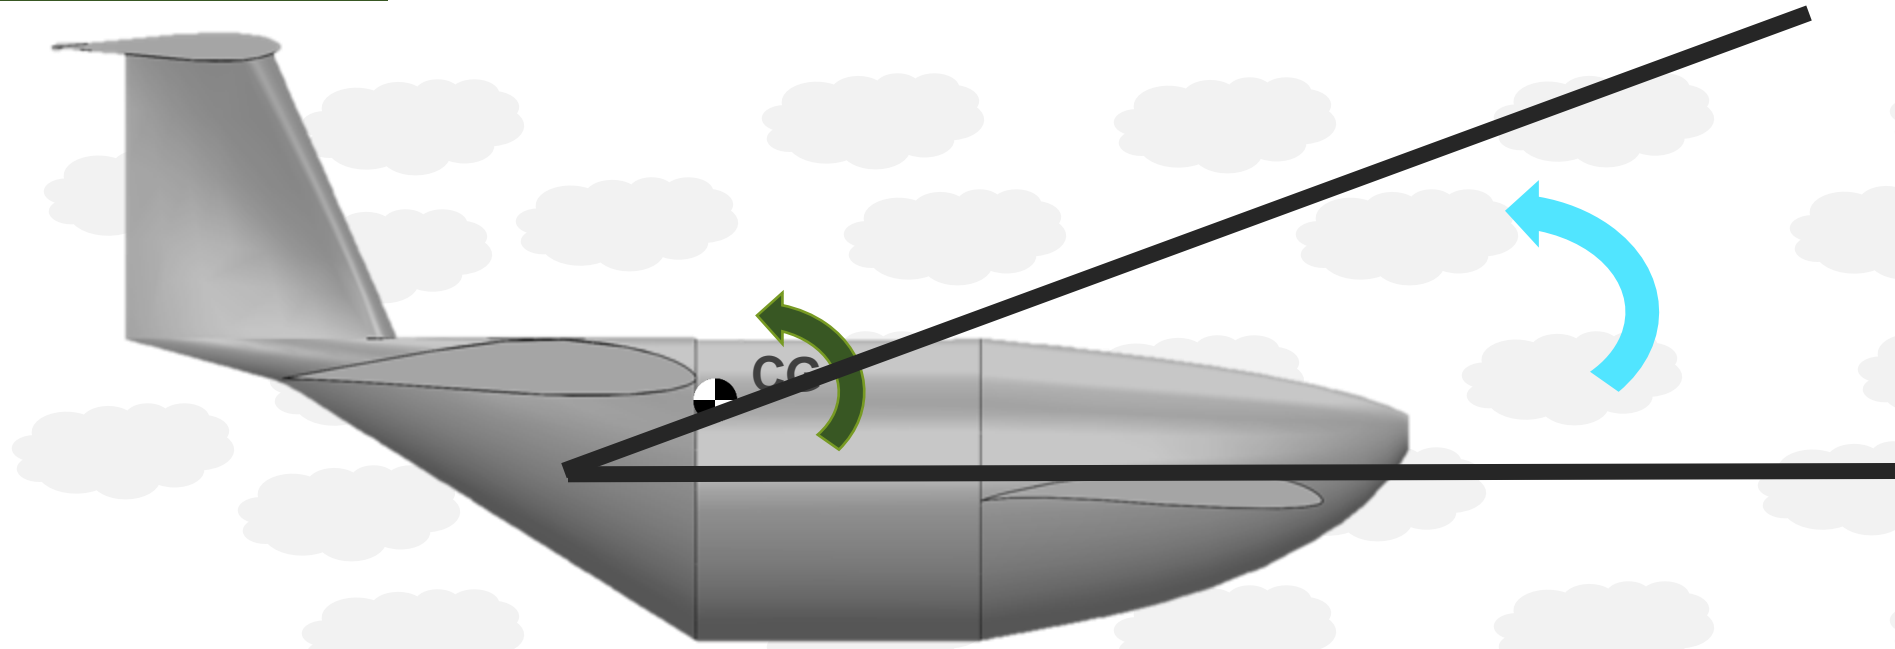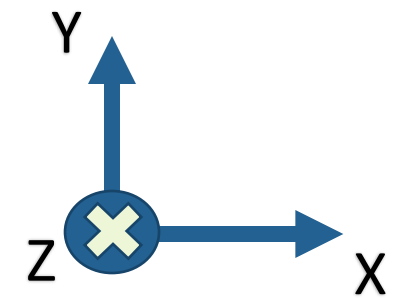

Noah Wright

Key Definitions

Stall: Net Lift = 0

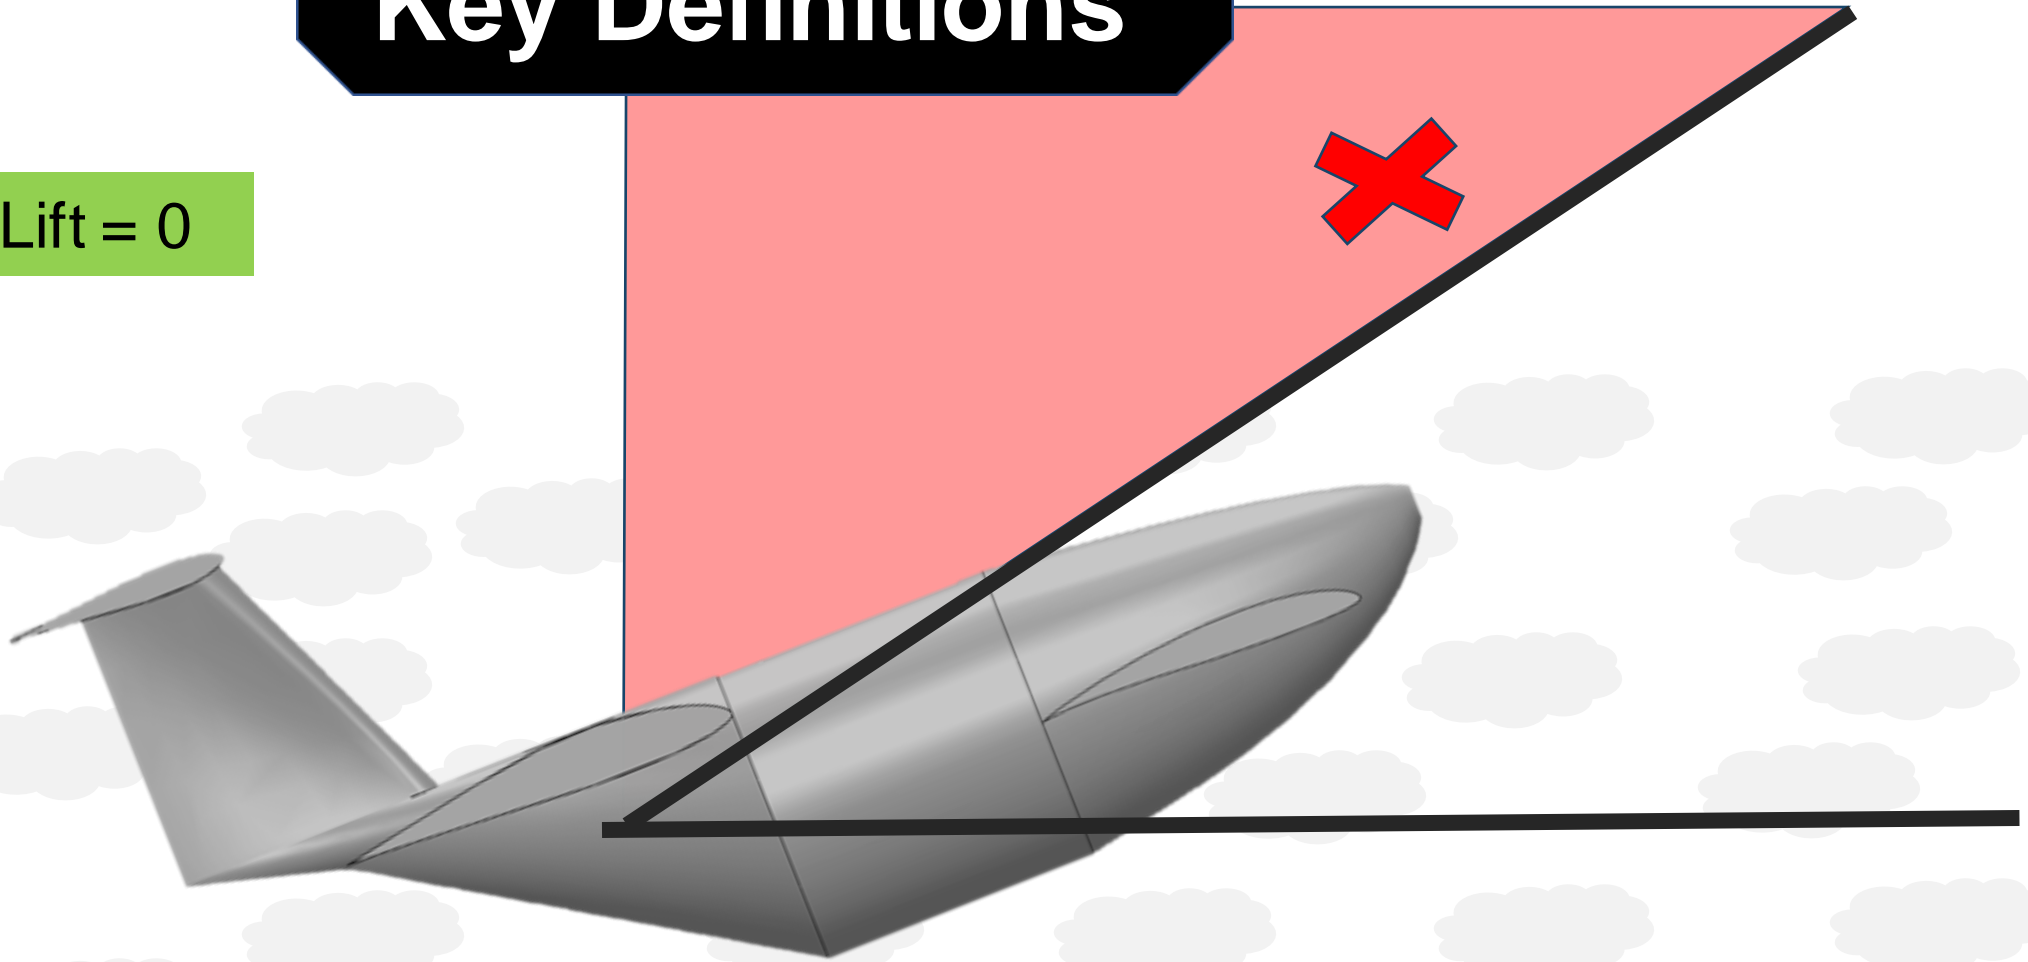


Noah Wright



Research and Concept Generation

Research and Concept Generation

Wing Positioning

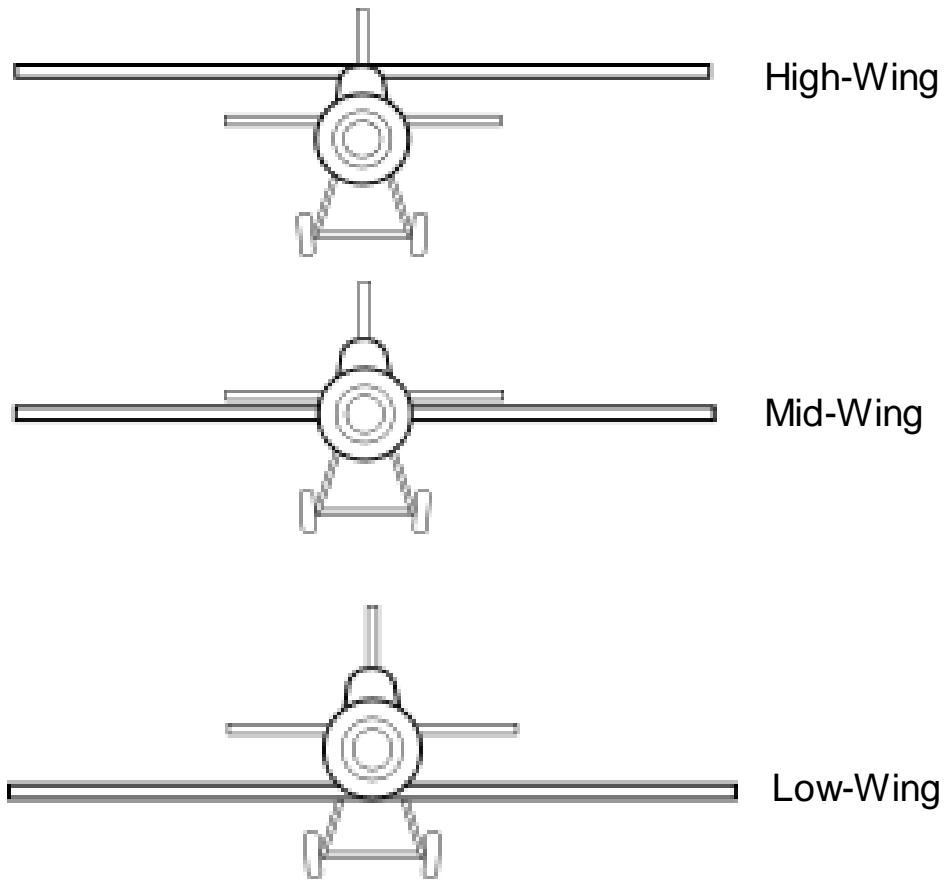

Tail and Tail Wing



Conventional

T-Tail

Dual Tail

Adrian Moya

Research And Concept Generation

Cargo Bay Location

Nose



Mid Plane



Possible for traditional wing layout


- Possible for simple canard and 3 wing layout

Adrian Moya

Research And Concept Generation

Possible Designs

Boomtown

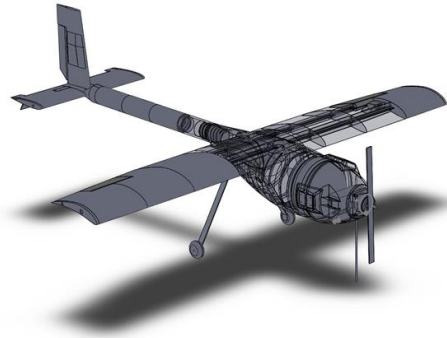

OMAC Laser 300



Rutan Quickie Q2



Kawasaki C-2



Boeing 747 Dreamlifter



Cameron Riley

Research And Concept Generation


Possible Designs

Alternative
Value




6. OMAC Laser 300

Concept 6

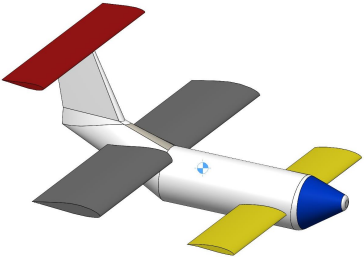


3. Rutan Quickie Q2

Concept 3

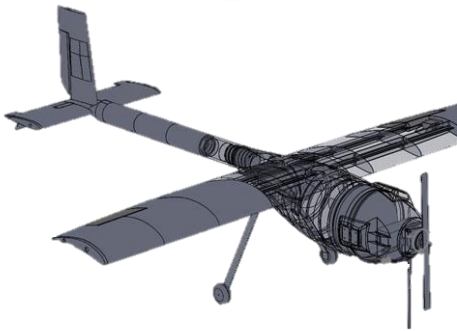

1. Boomtown

Concept 1

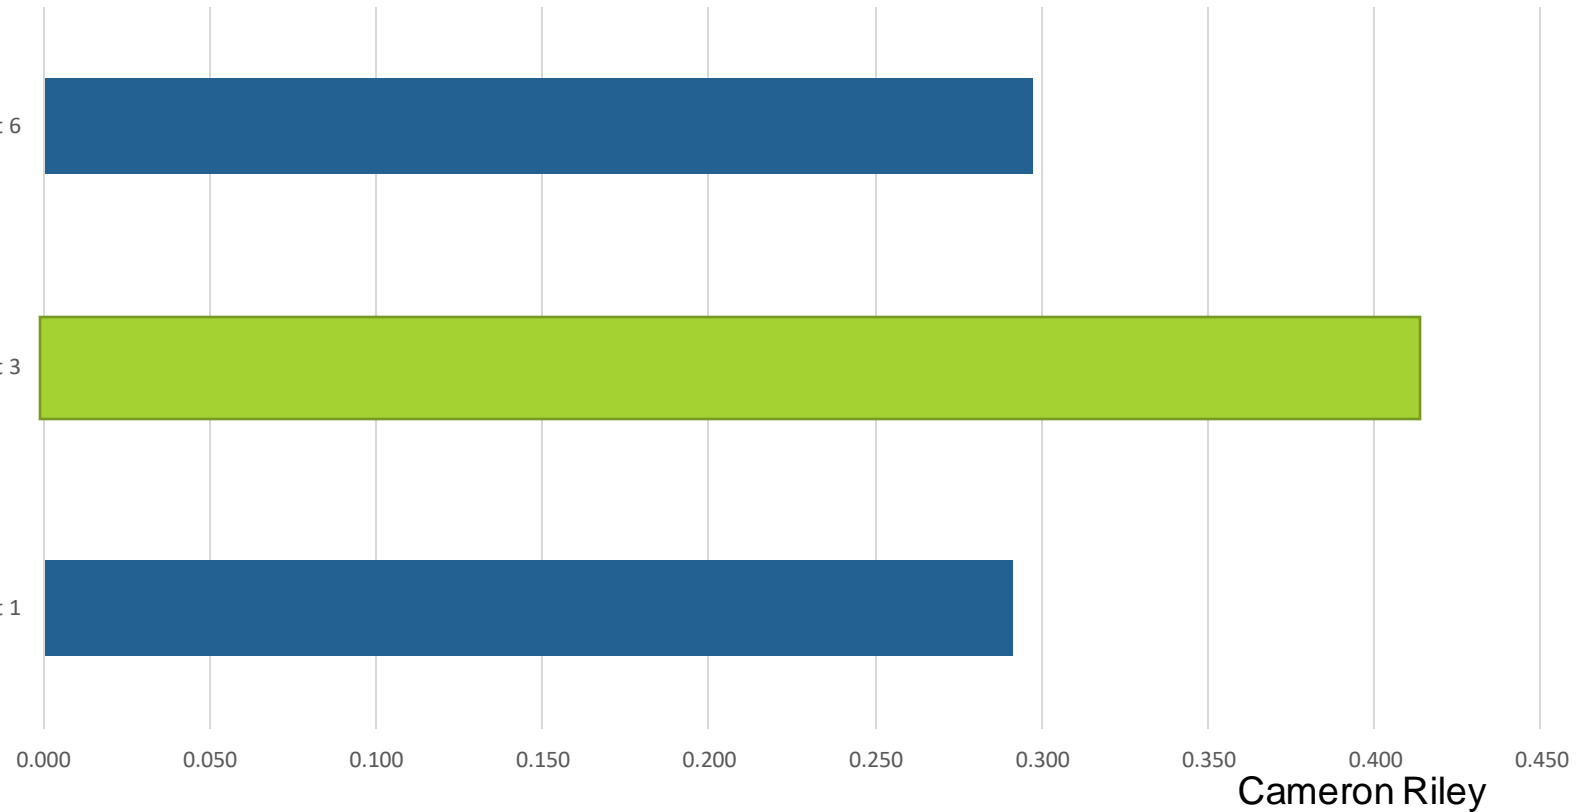

Design Development Procedure



Initial Design

DATCOM Data

- Intuitive design tool on MATLAB
- Analyze DATCOM data to calculate stability and control
- Needs to use NACA Airfoils


Parameters:

Wing	HT	VT	Control	Body	Aero	+
Angle(s) of Attack	-4:4:16	deg				
Altitude	0	ft				
Mach Number	0.09	(or kts)				
Weight	240	lb				
CG Location, X	WG.X+WG.	ft				
CG Location, Z	0	ft				
Inertia, X	100	slug*ft ²				
Inertia, Y	100	slug*ft ²				
Wing Root Airfoil	2412	NACA				
Wing Tip Airfoil	2412	NACA				
Tail Airfoil	0012	NACA				

CG Adjust: %MAC

Plot: Geometry, Stability, Aerodynamics


Stability: CG at 25% MAC: Aircraft is 21% stable

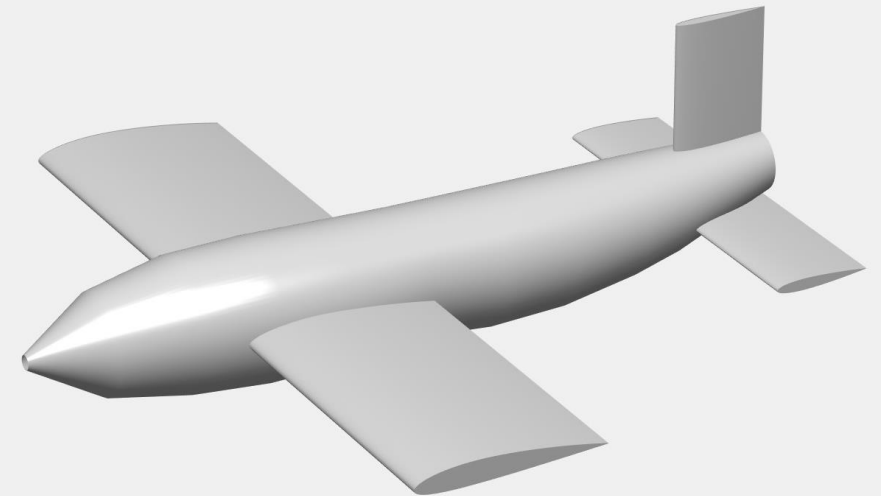

Adrian Moya

Design Development Procedure


Selected Concept

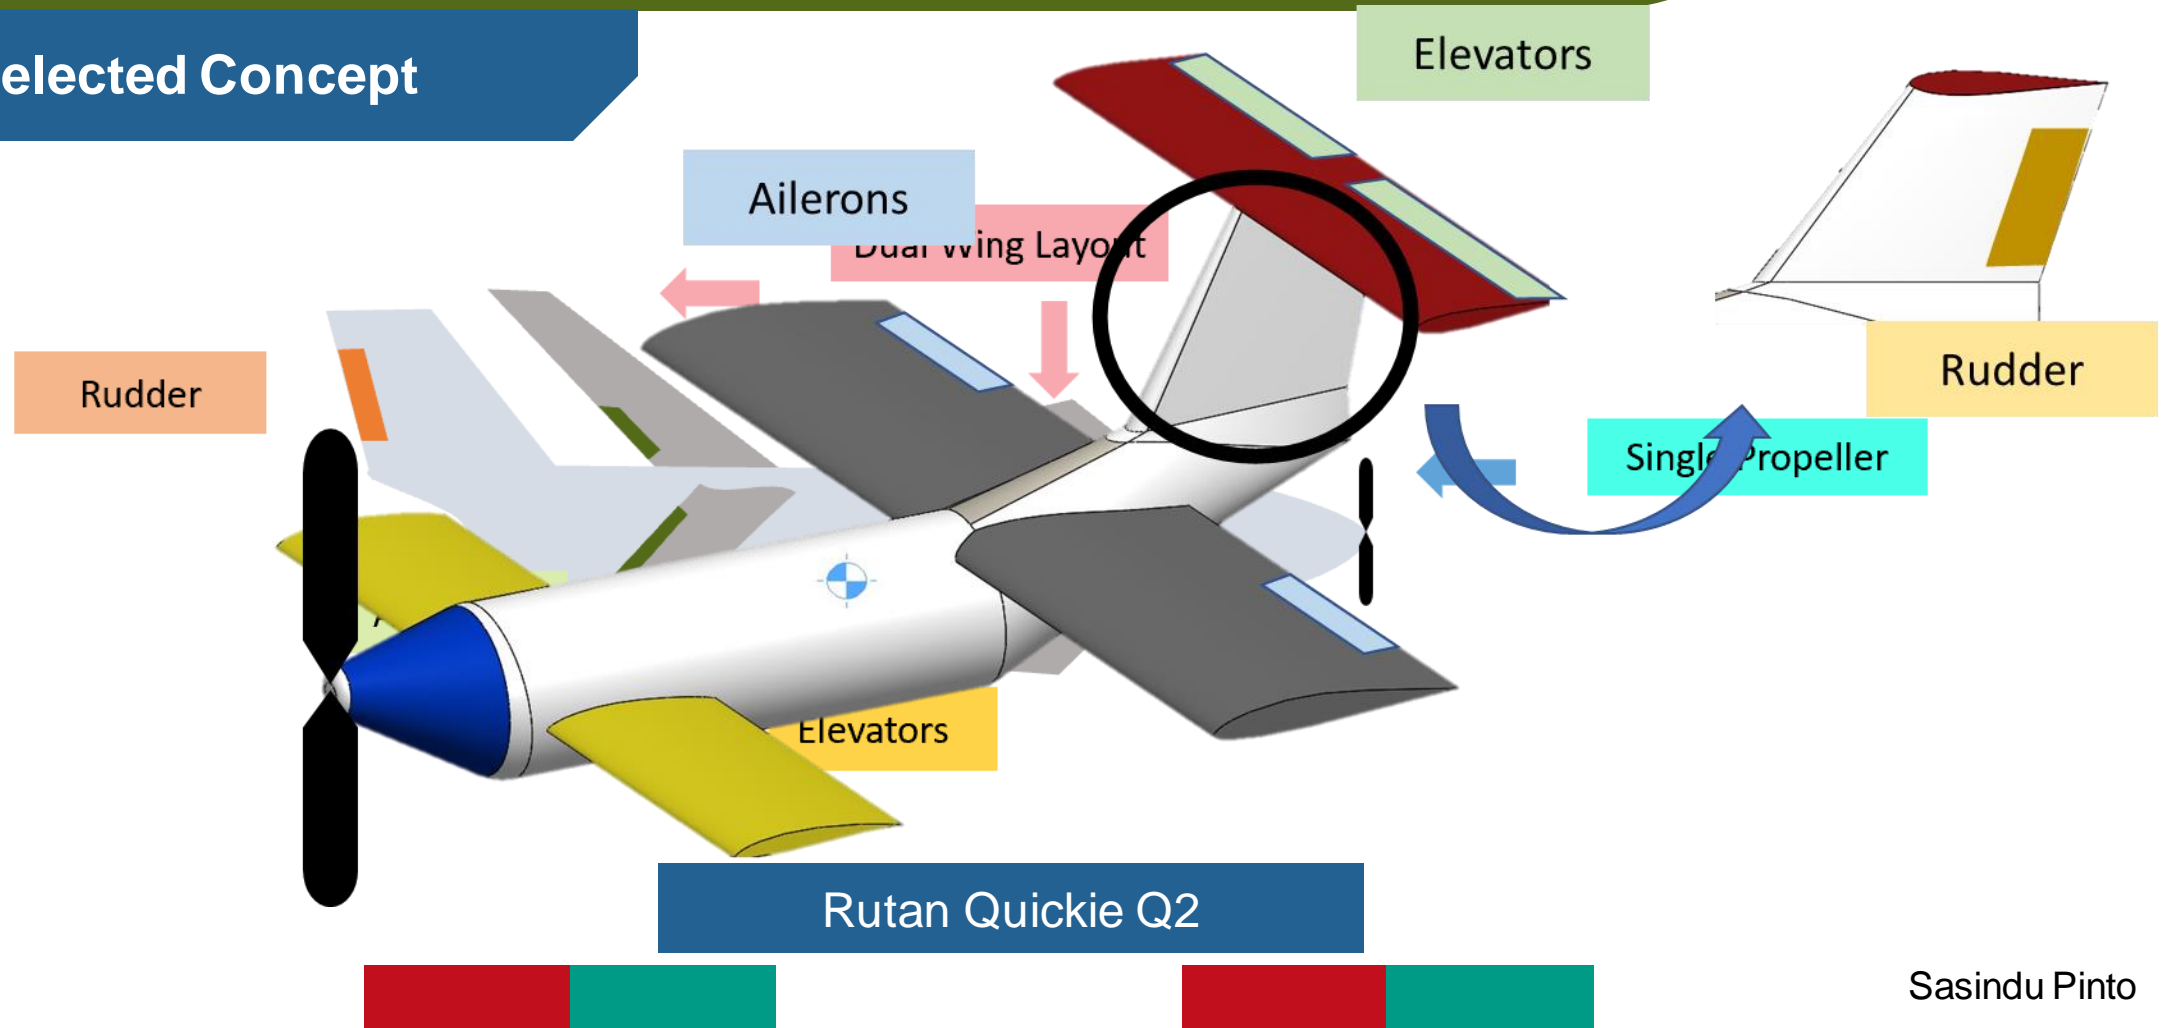

Sasindu Pinto


Design Development Procedure

Thrust Test - Setup

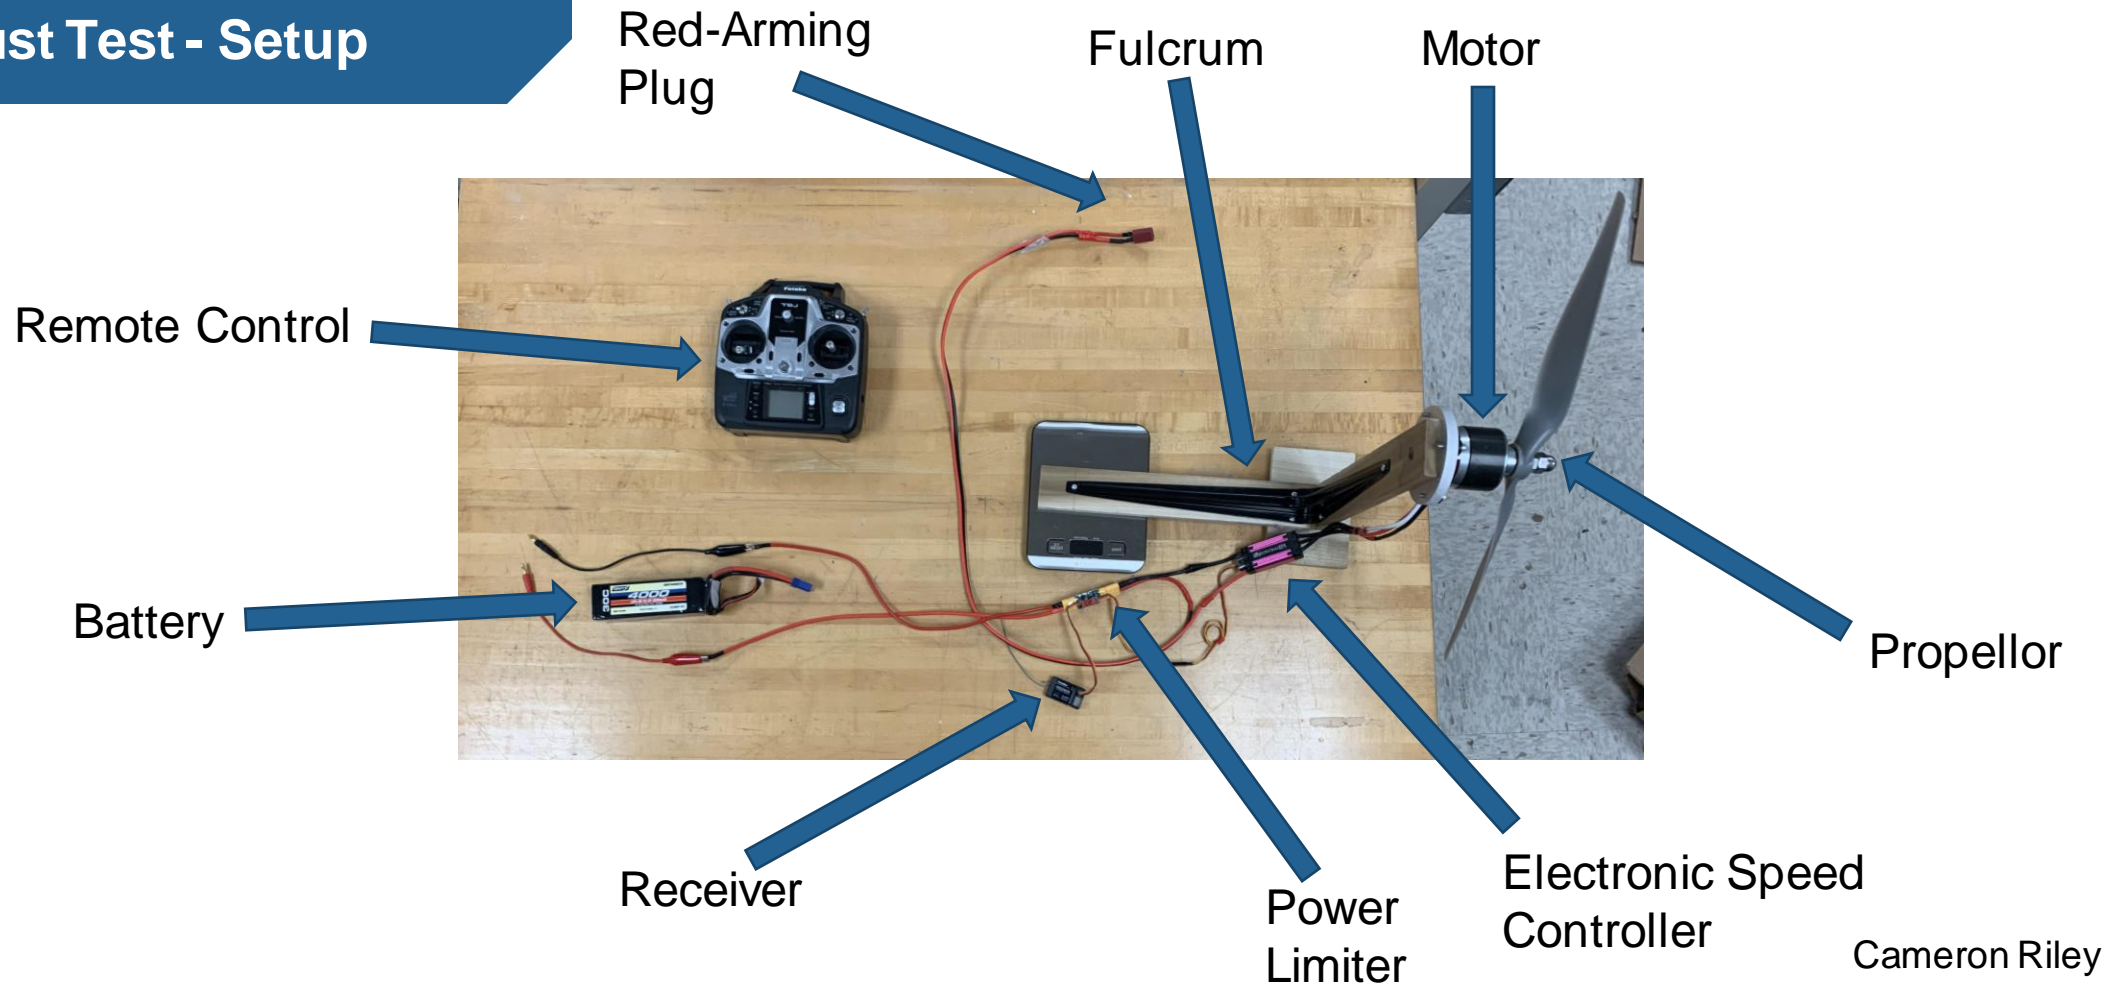


Design Development Procedure

Thrust Test

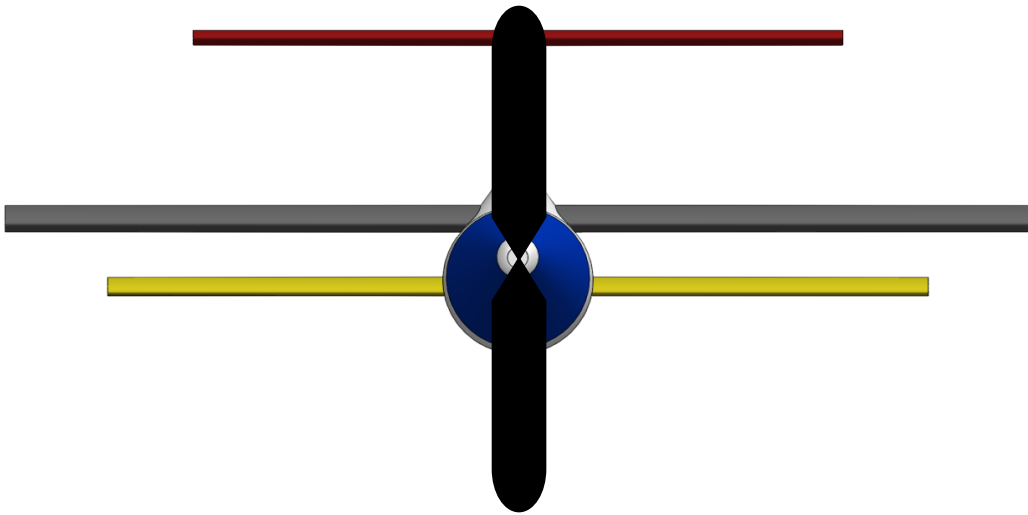

Experimental Thrust ~ 222 lbf

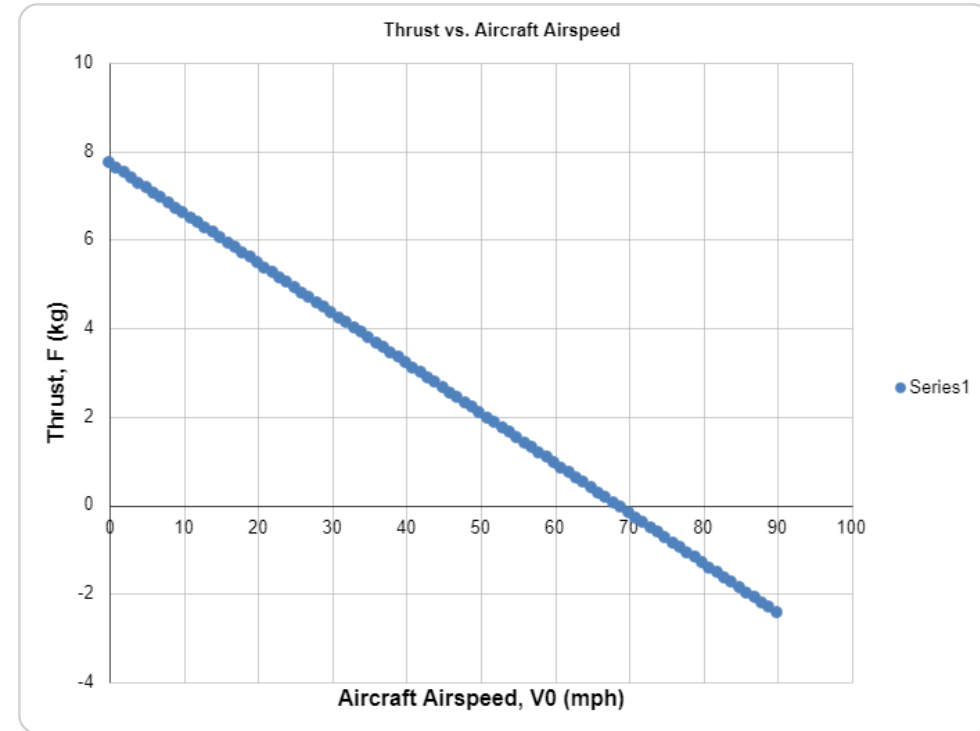


Calculated Static Thrust ~ 167 lbf

Cameron Riley

Design Development Procedure

Test Print Correlation Error

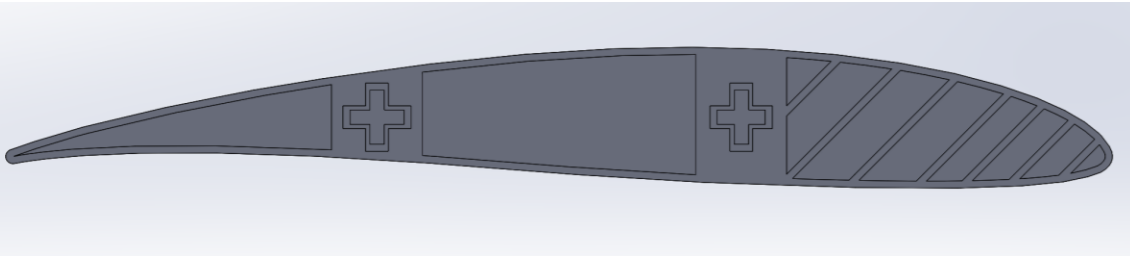

**Projected Weight ~
0.109 lbs.**

**Actual Weight –
0.211 lbs.**

**Initial density –
0.00245 lb./in³**



**Adjusted density –
0.00474 lb./in³**

Cameron Riley




Redesigned Plane Analysis

Redesigned Plane Analysis

Comparison


Reduction in Fuselage Length

Old Design

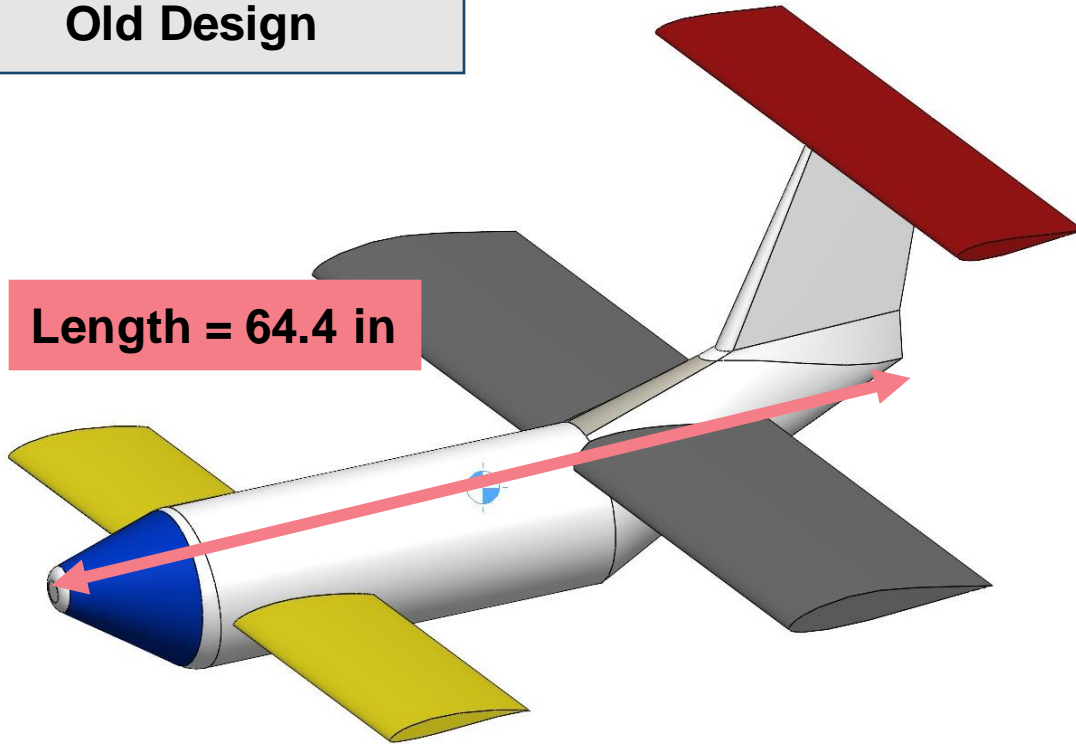

Vs

New Design

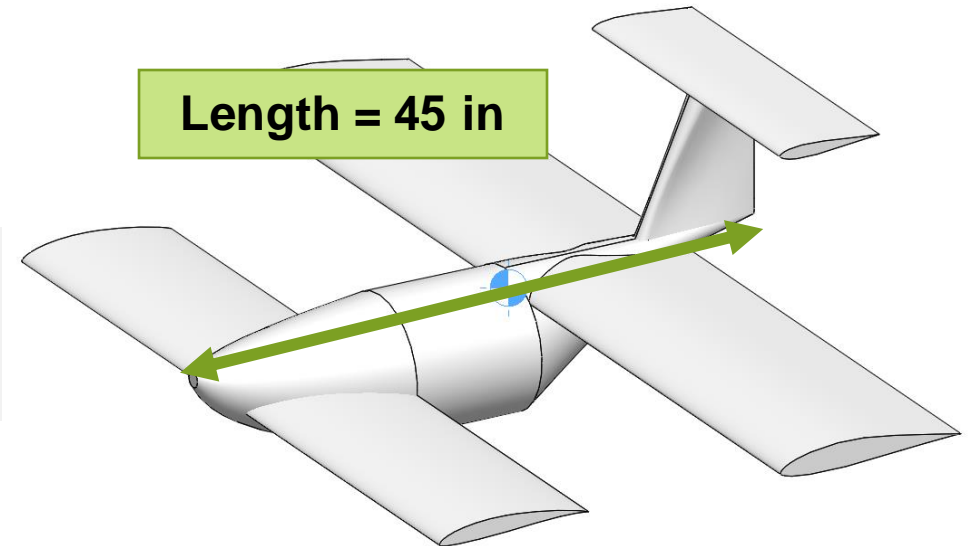

Cameron Riley

Redesigned Plane Analysis

Comparison

Smaller Fuselage and Tail Wing

New Design

Old Design

Nose

Tail
Height = 14 in

Span = 47.5 in

Chord Length = 9 in

Nose

Tail
Height = 10 in

Span = 26.5 in

Chord Length = 8 in

Vs

Reduced Tail Wing Area


Cameron Riley

Redesigned Plane Analysis

Comparison


Smaller Fuselage and Tail Wing

Old Design

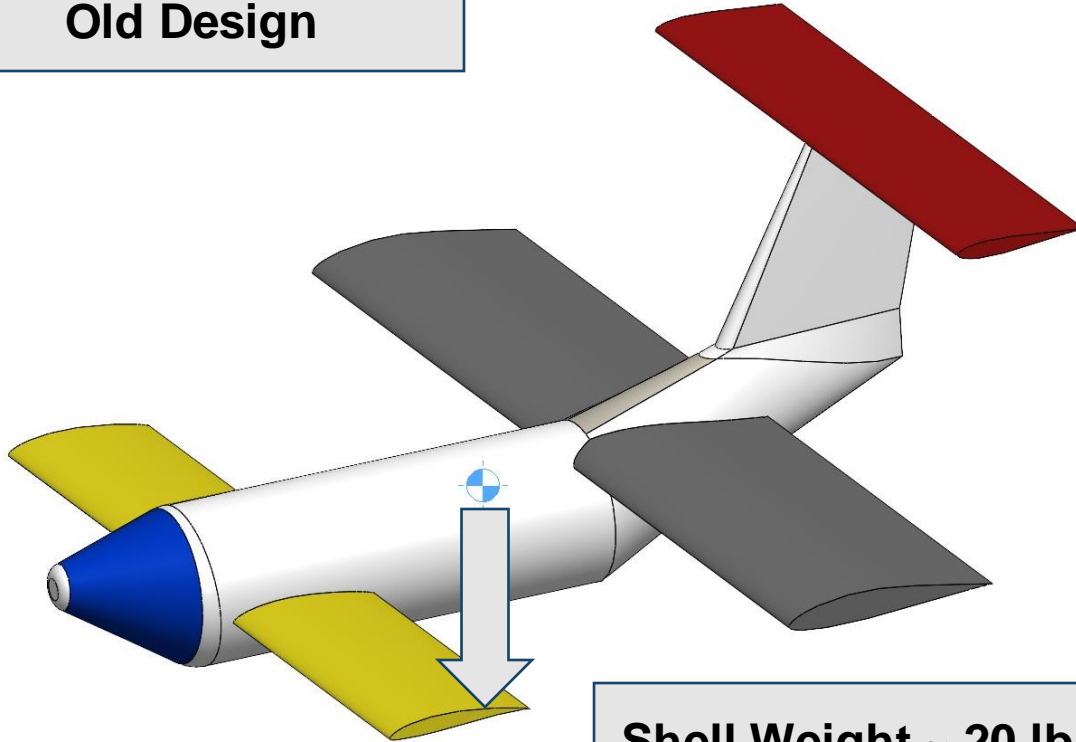

Shell Weight ~ 20 lbs.

Vs

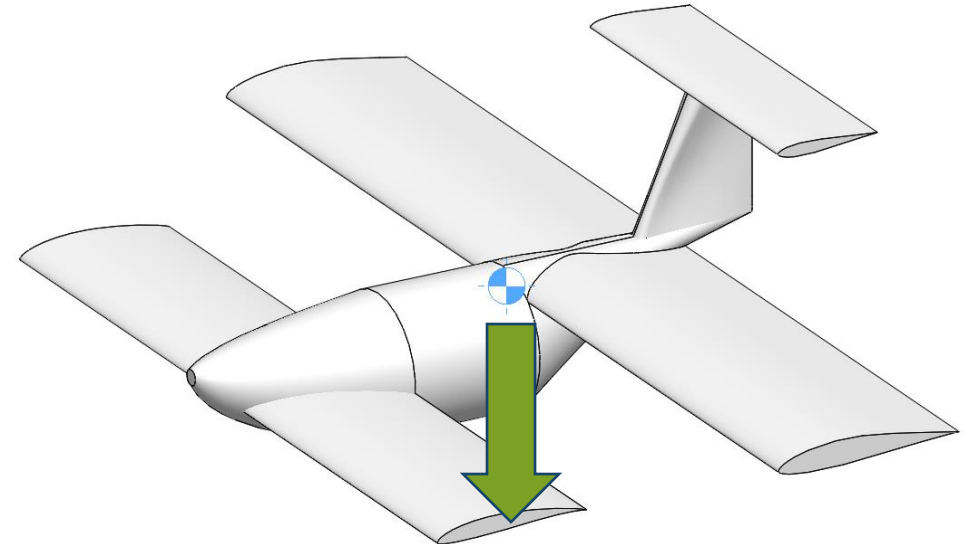


Shell Weight ~ 10.5 lbs.

Actual Shell Weight ~ 9 lbs.

Sasindu Pinto

Redesigned Plane Analysis


Landing Gear Weight Distribution

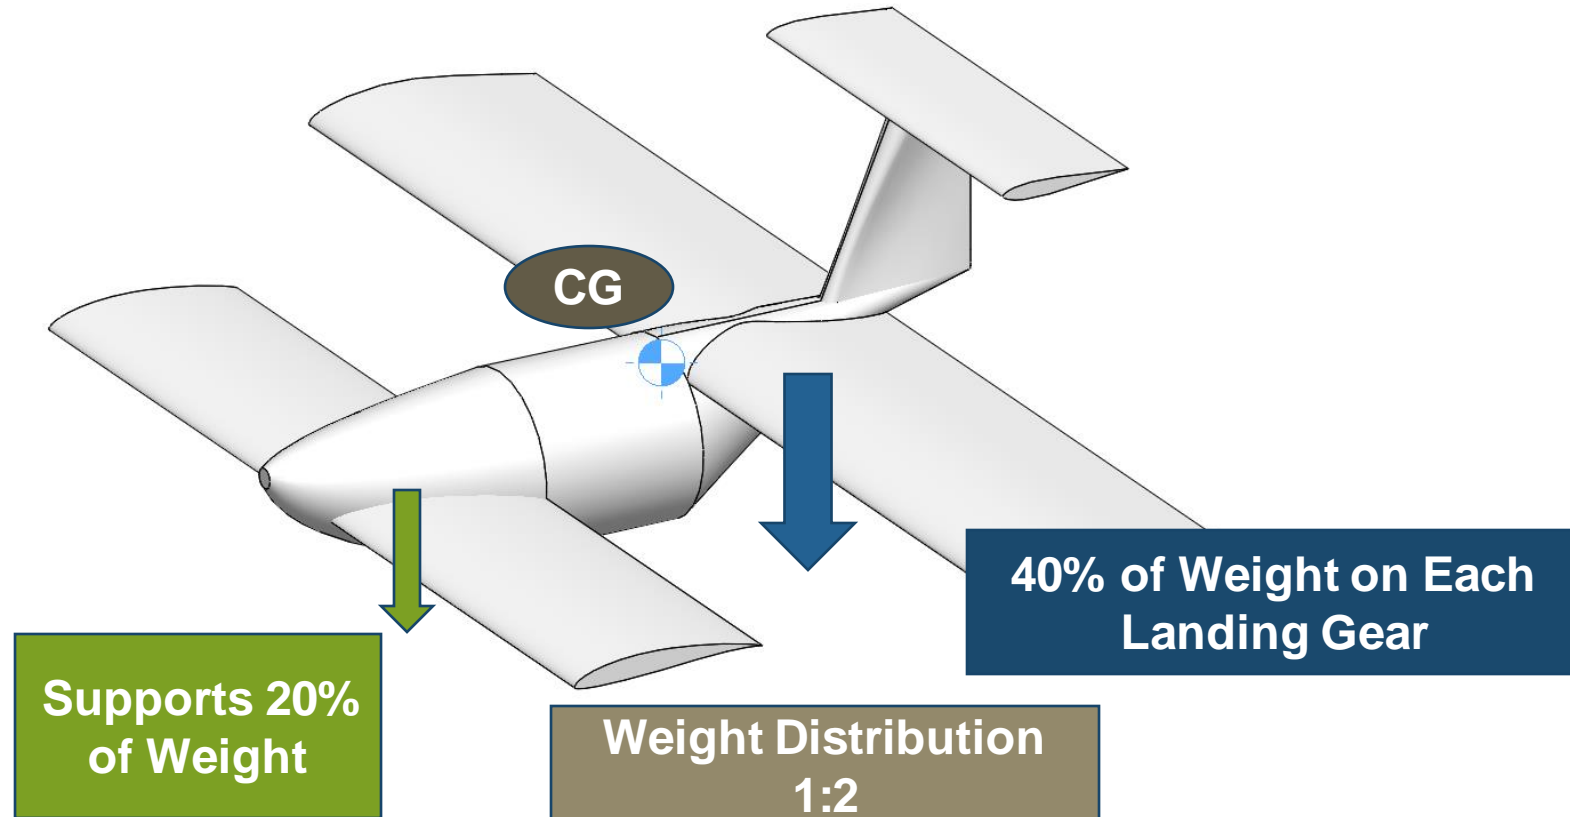

Sasindu Pinto

Redesigned Plane Analysis

Pitch Stability

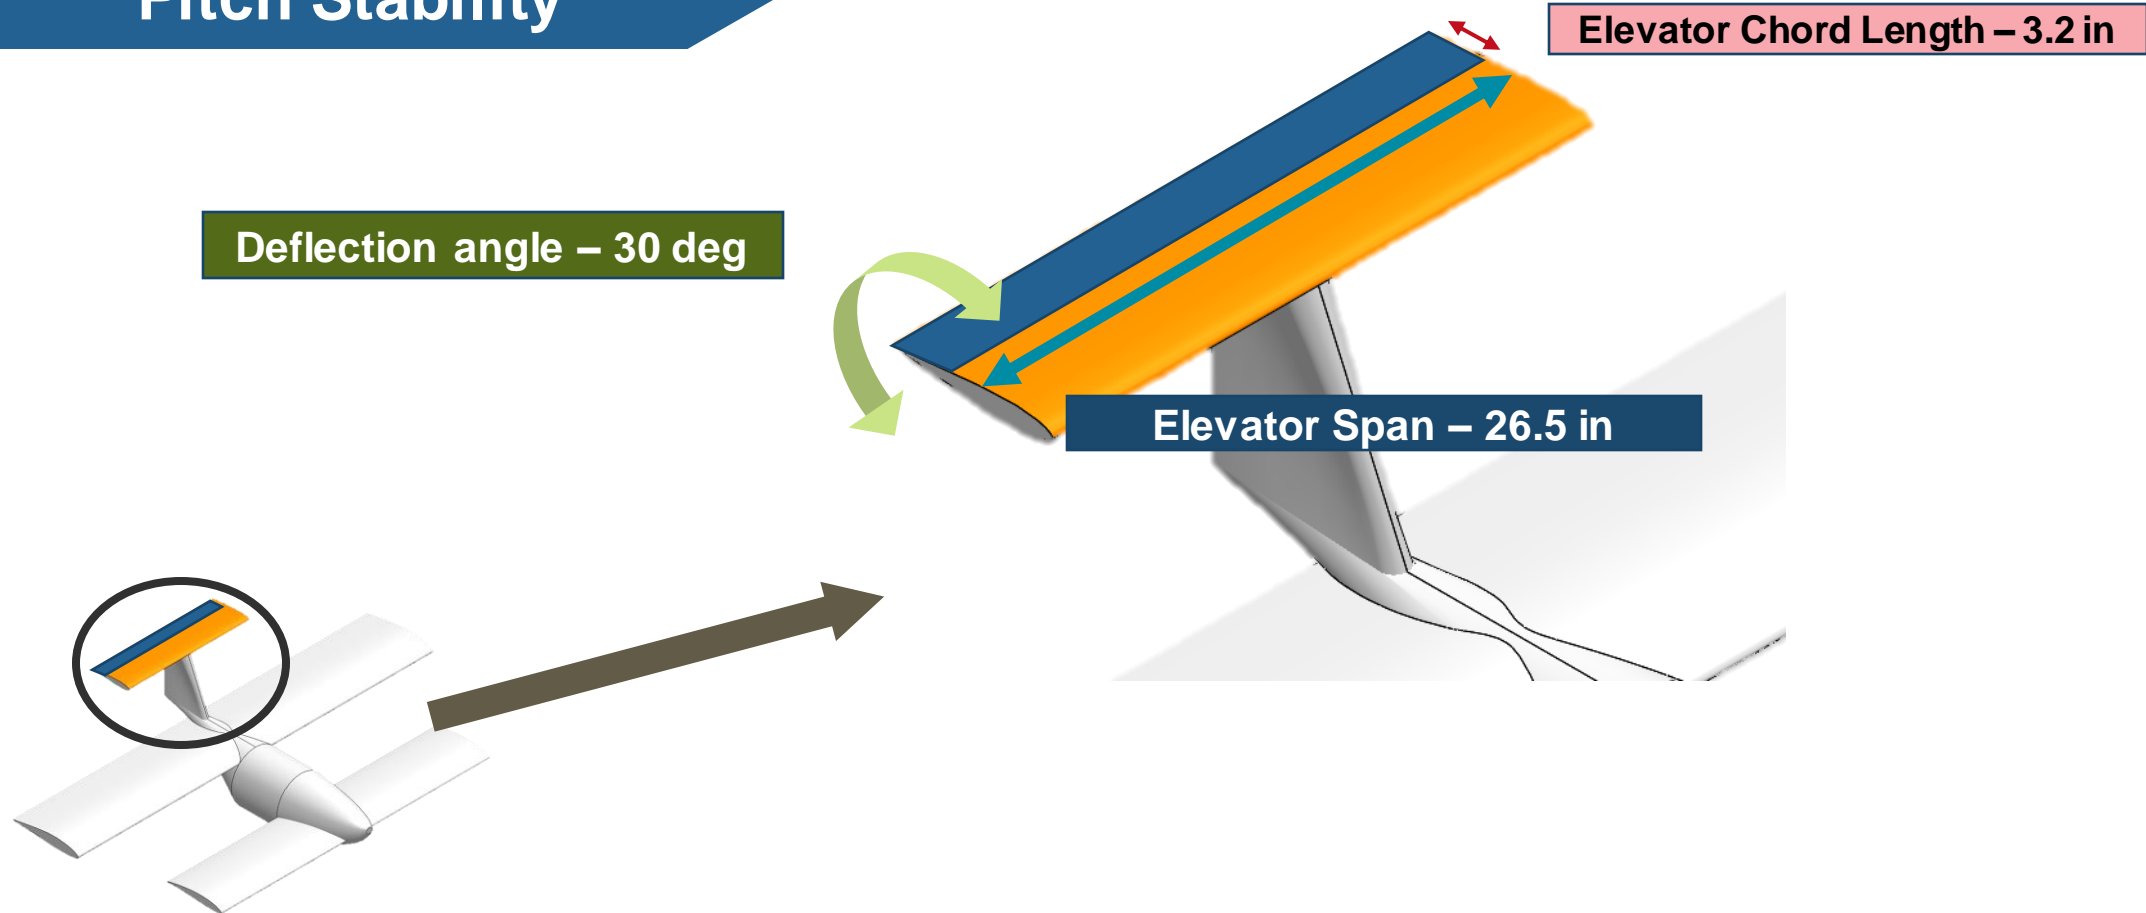


Sasindu Pinto

Redesigned Plane Analysis

Pitch Stability


Equilibrium Angle of Attack

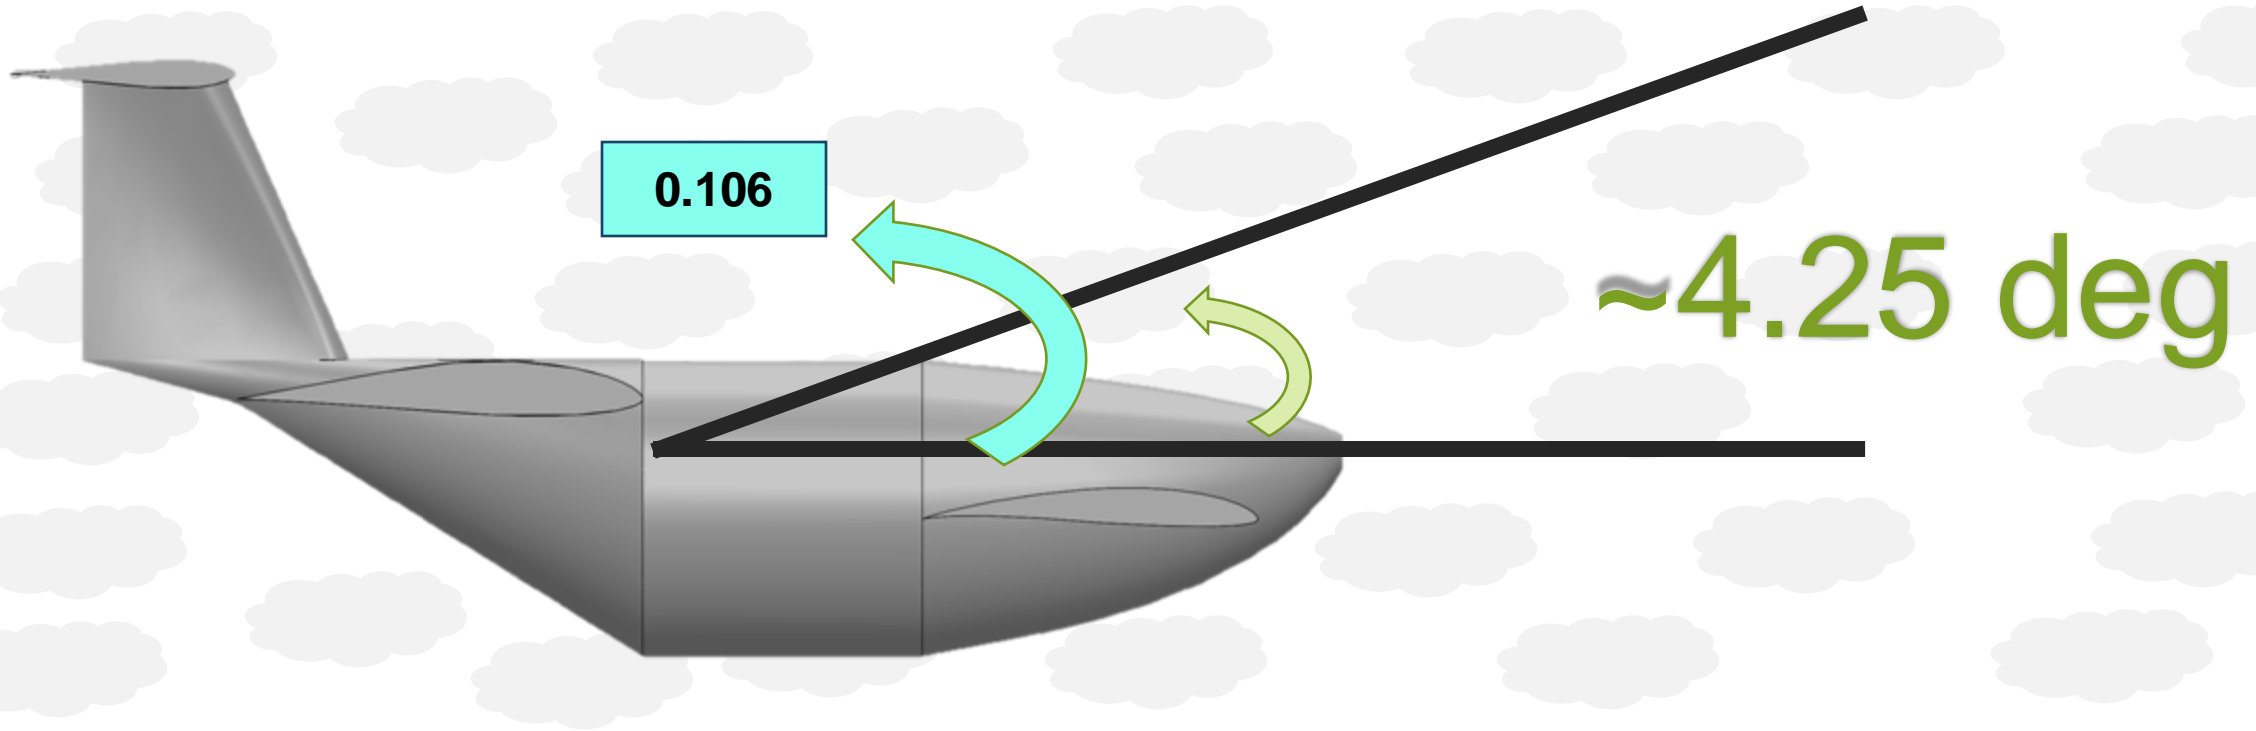

Sasindu Pinto

Redesigned Plane Analysis

Control Surface Motion

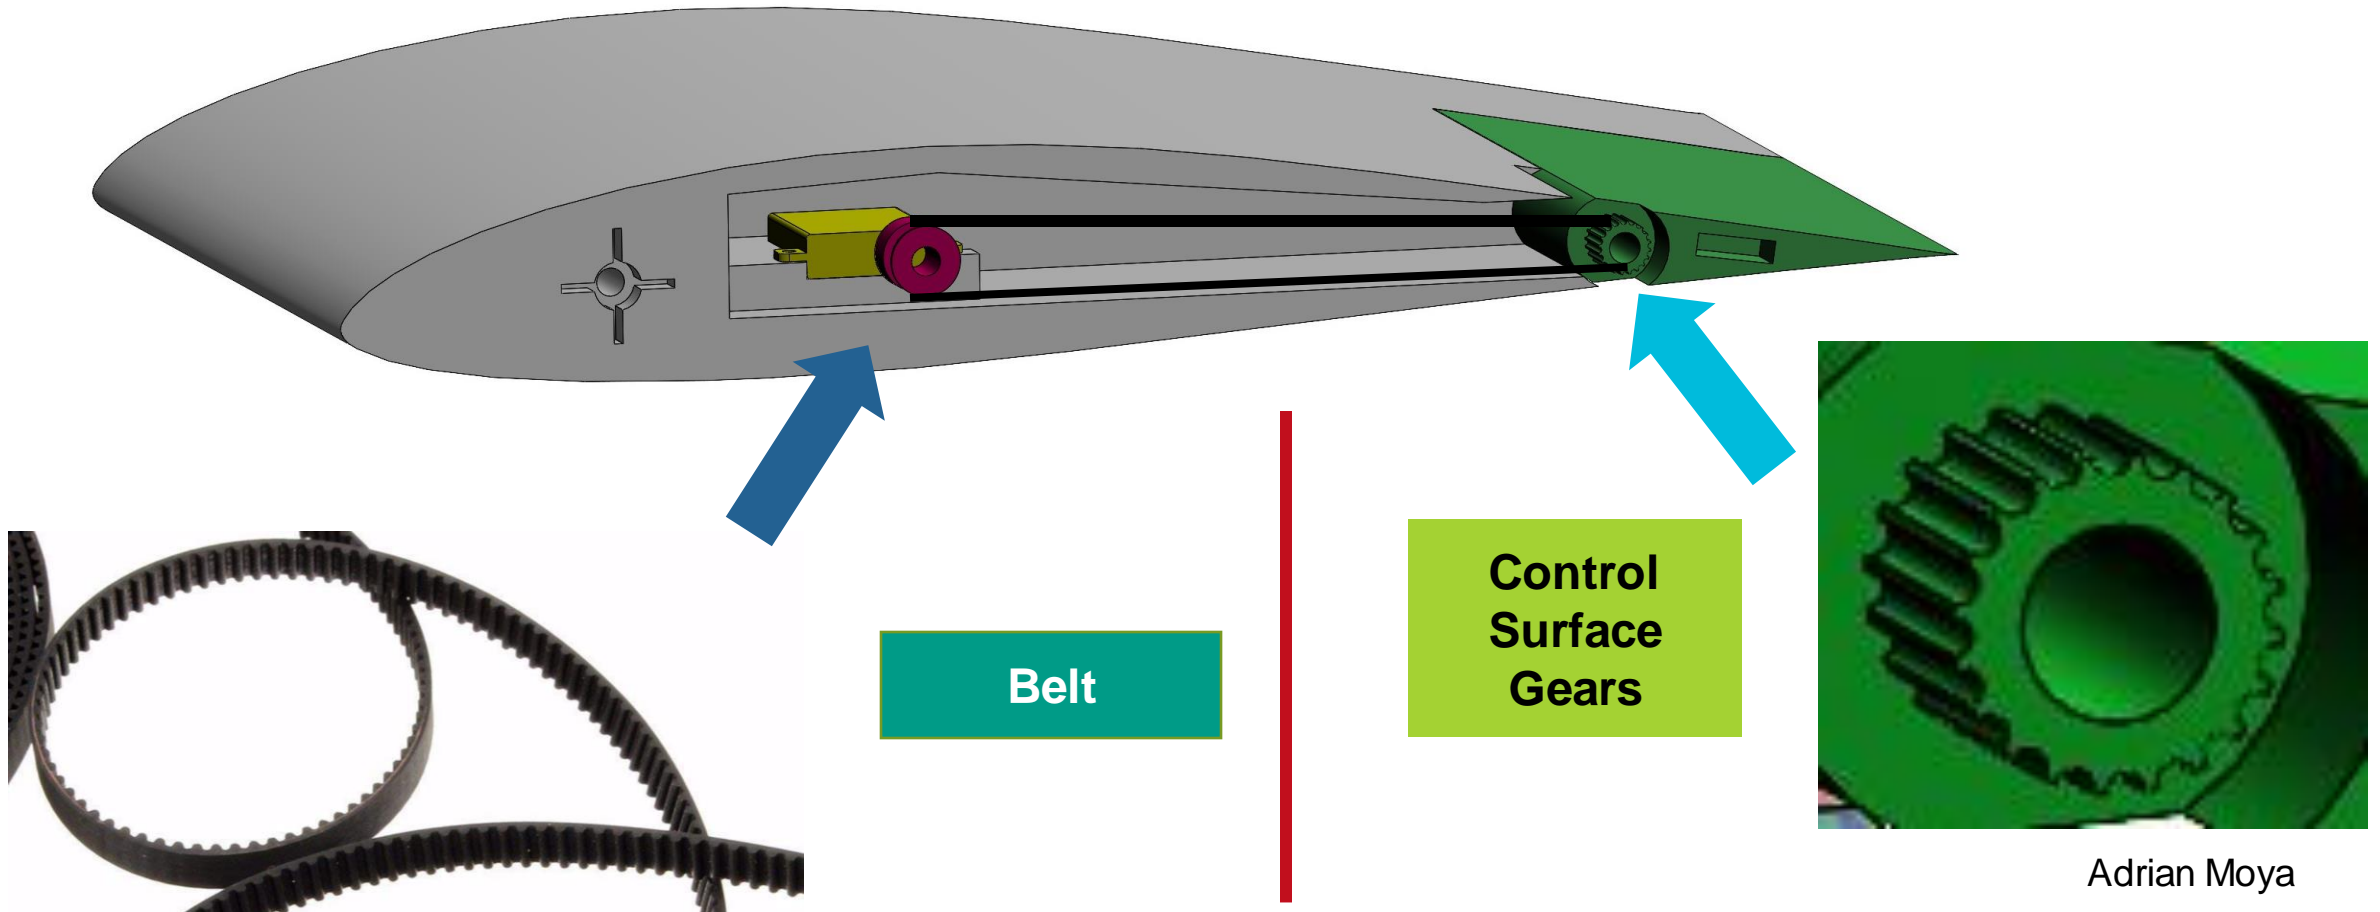

Adrian Moya

Redesigned Plane Analysis


Roll Stability

Distance to Fuselage – 15.25 in

Downward Deflection Angle – 8 deg

Upward Deflection Angle – 20 deg

Differential Setting : 2.5:1

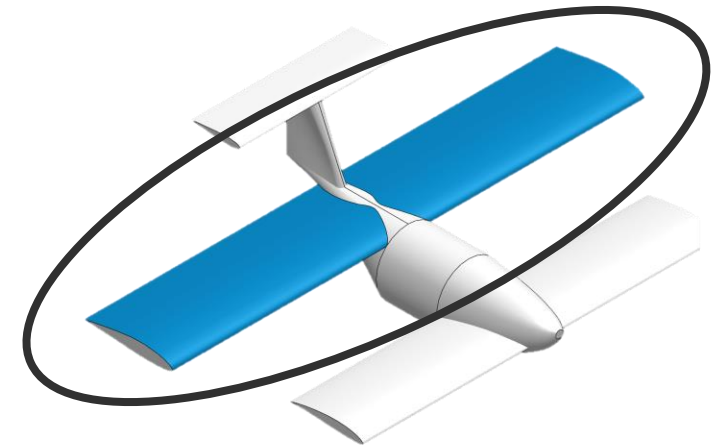


Sasindu Pinto

Redesigned Plane Analysis

Roll Stability


Roll Rate: 4.75 deg/s

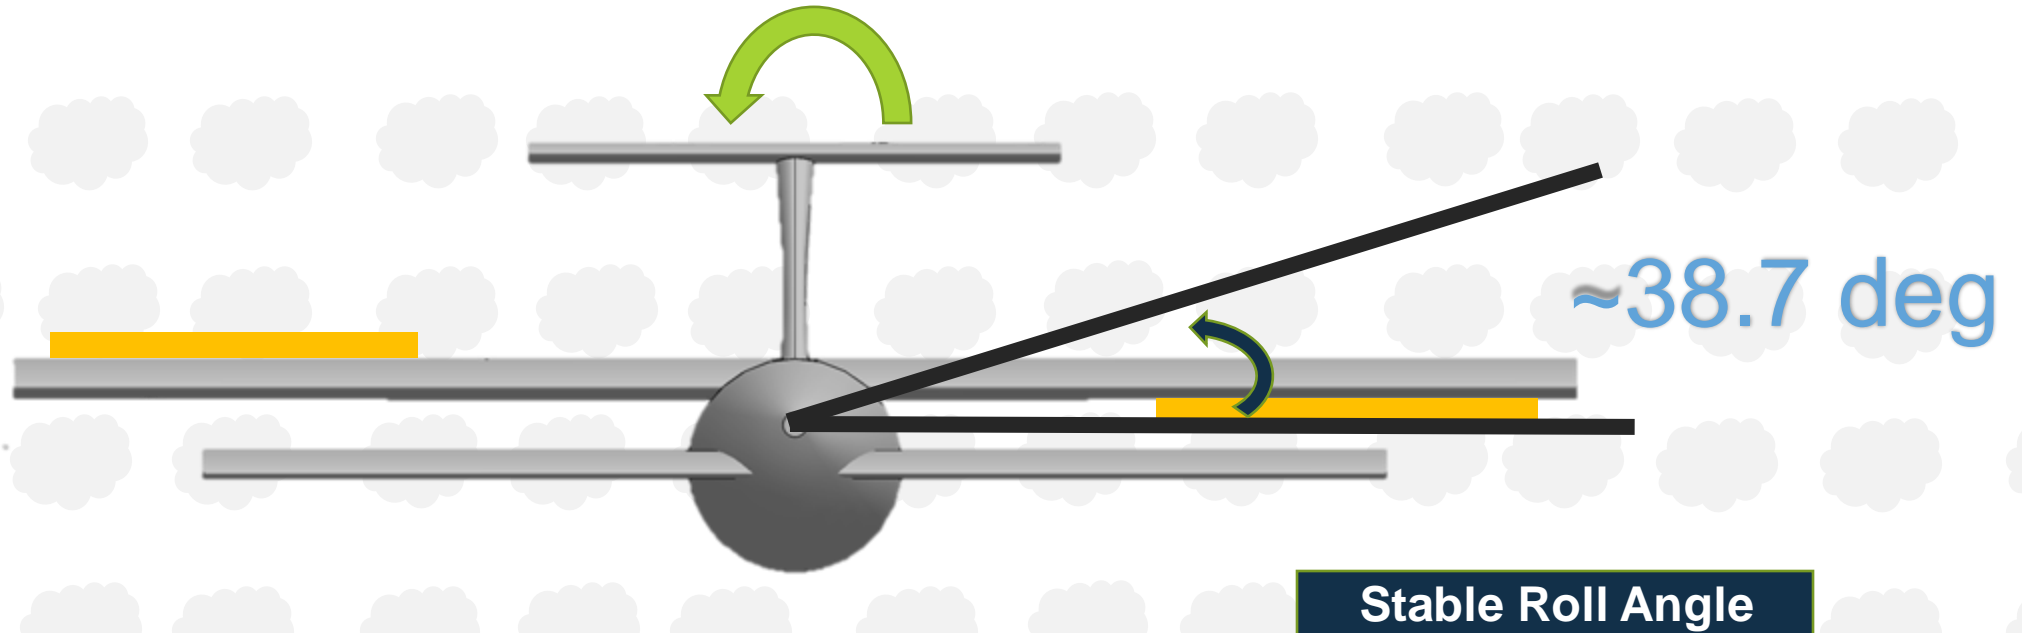

Sasindu Pinto

Redesigned Plane Analysis


Yaw Stability

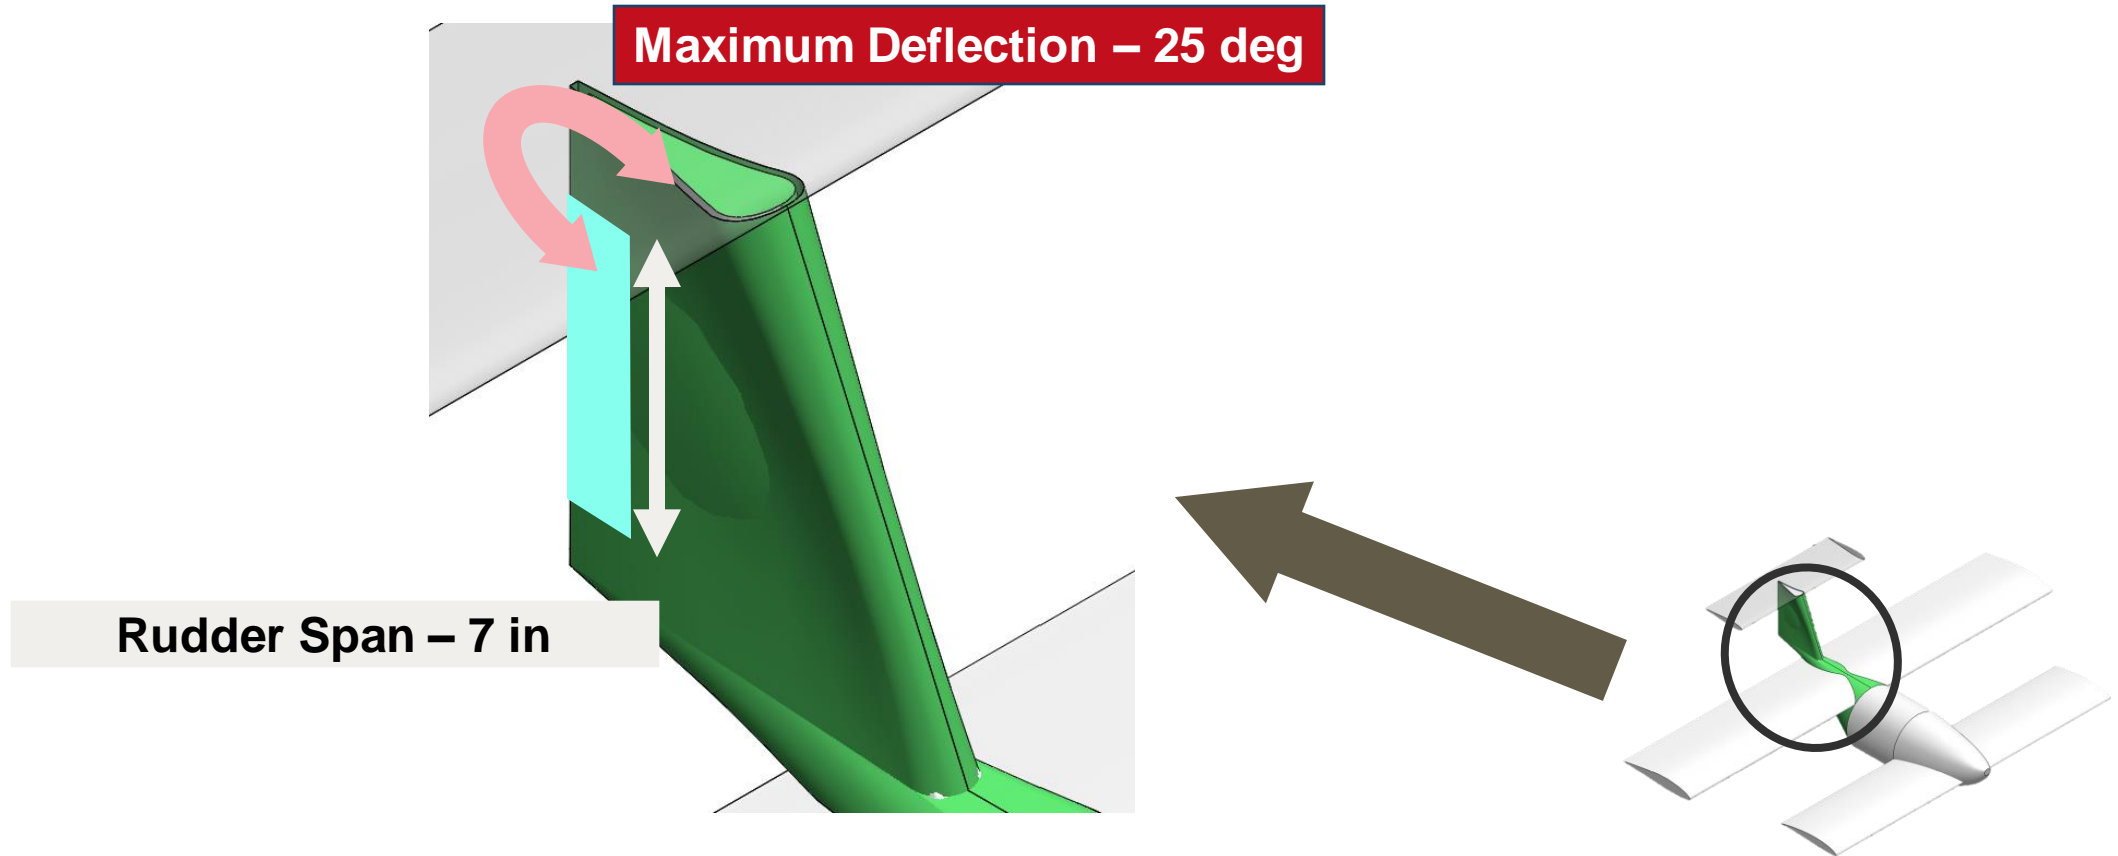

Sasindu Pinto

Redesigned Plane Analysis


Yaw Stability

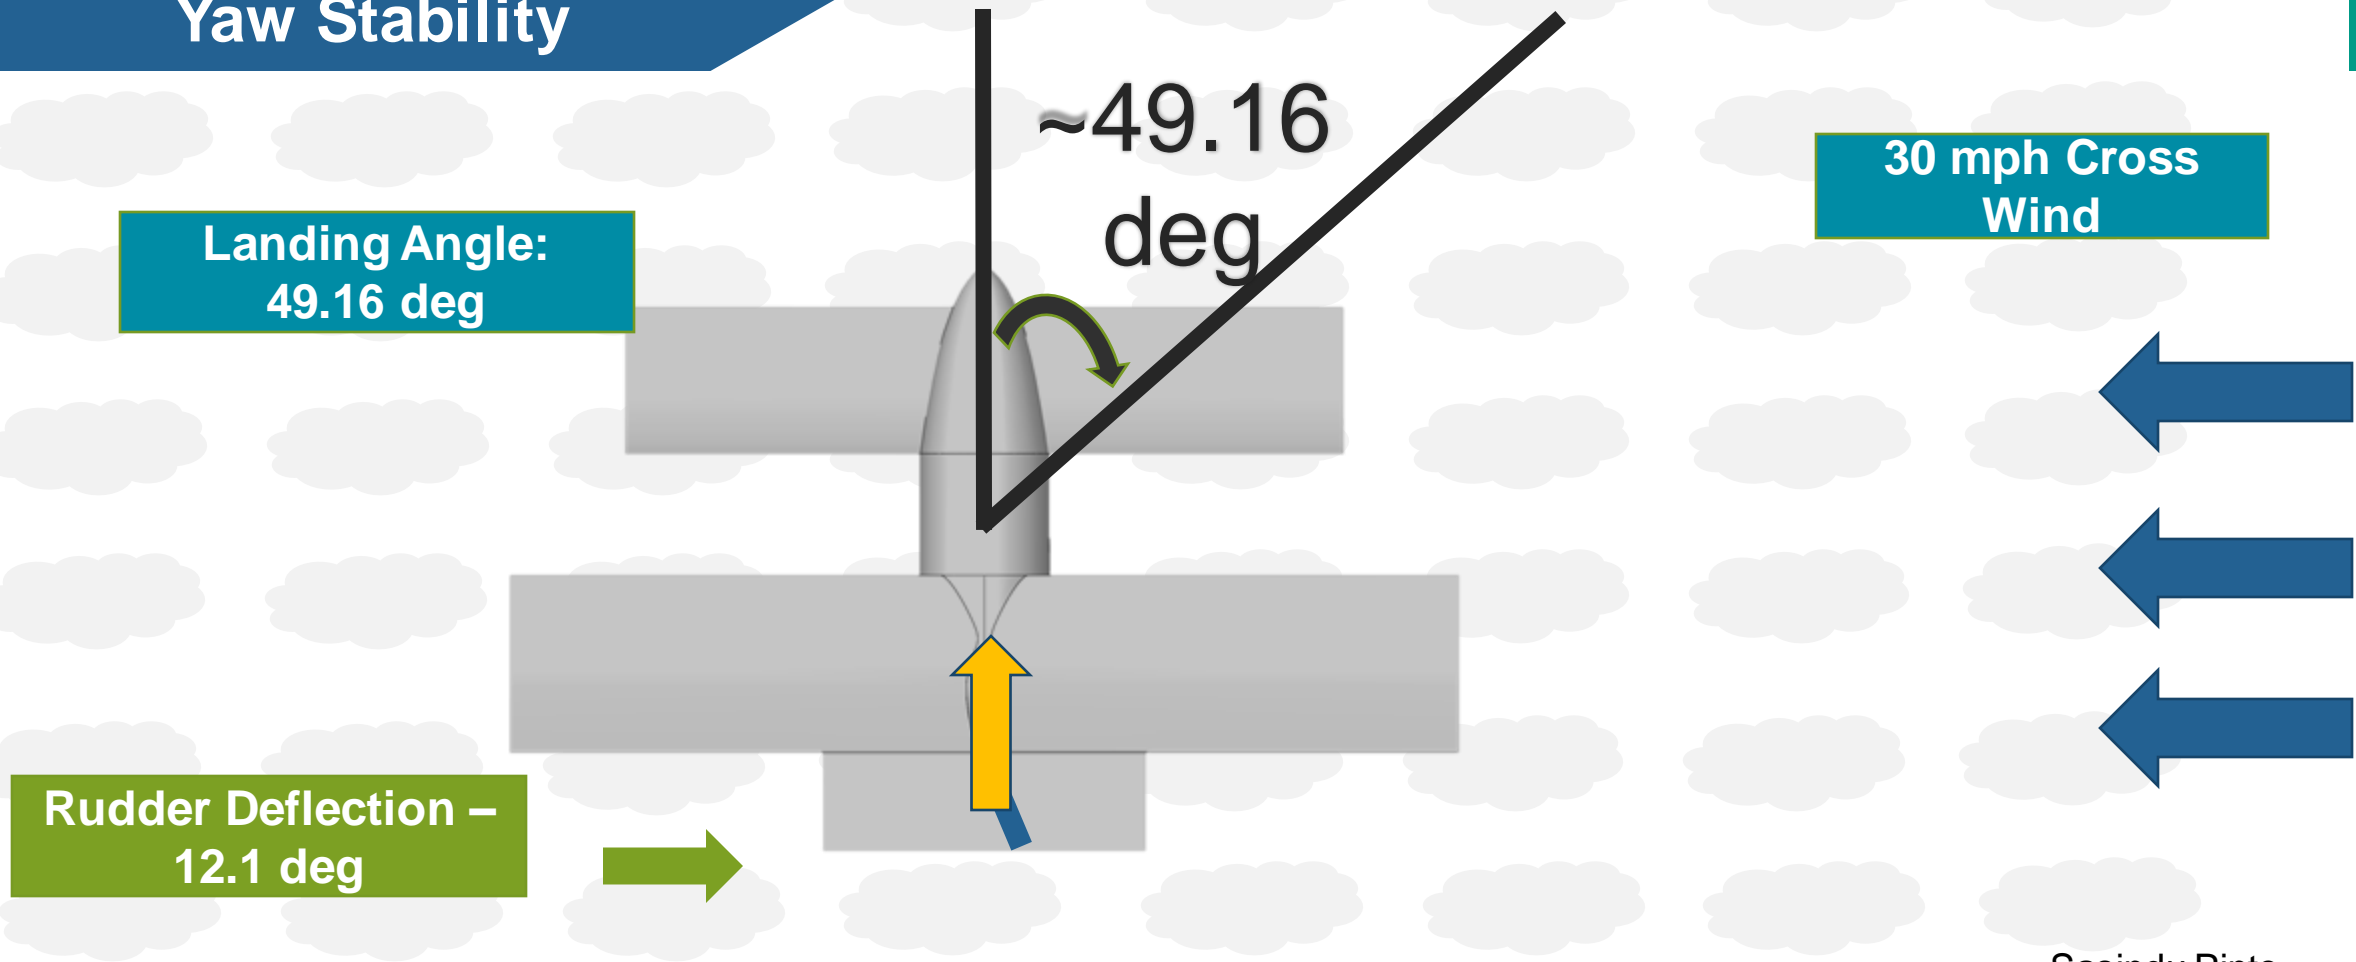

Sasindu Pinto

Redesigned Plane Analysis

Xfoil Analysis

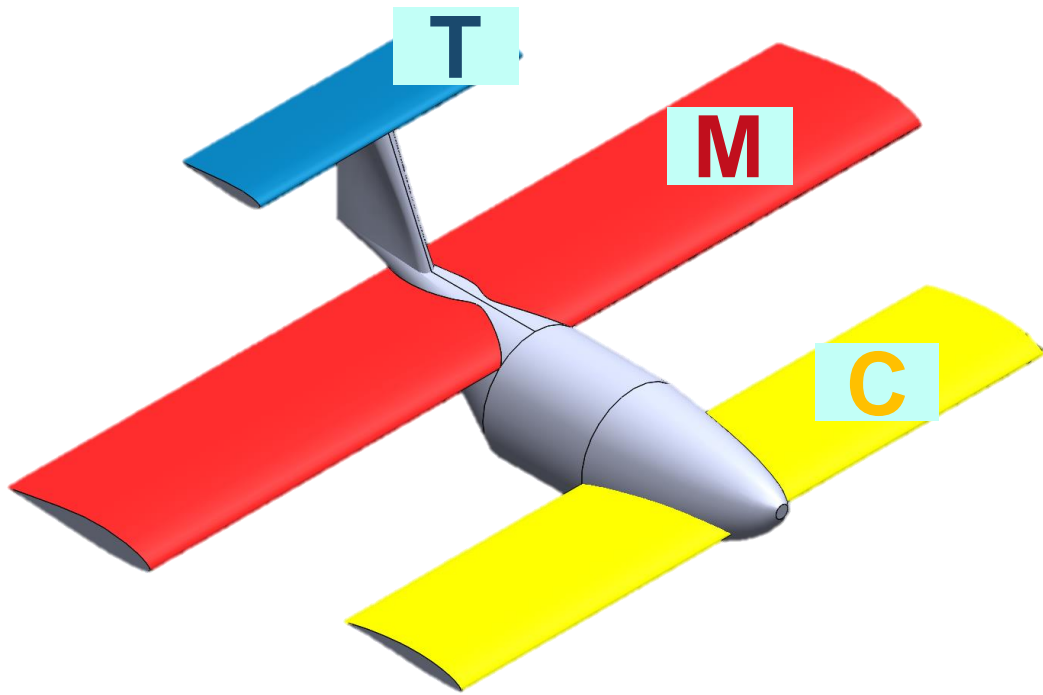

Canard Stall



C


M

T


Noah Wright

Redesigned Plane Analysis

XFLR5 Analysis

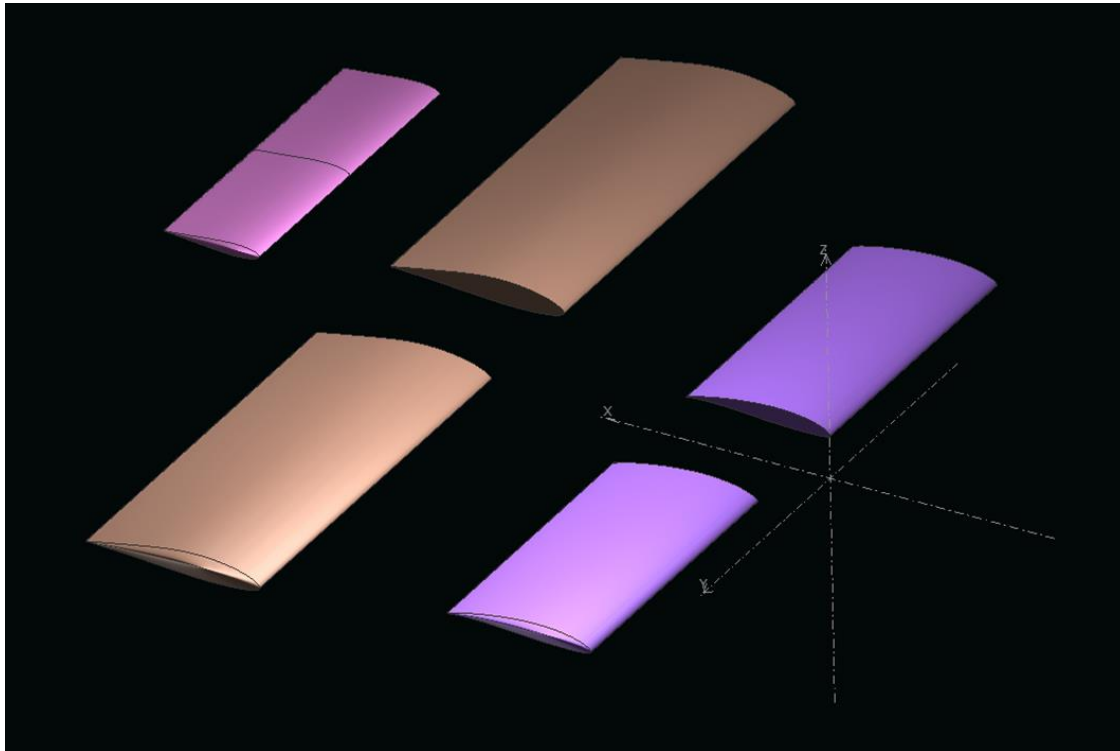

Current Wing Layout in XFLR5

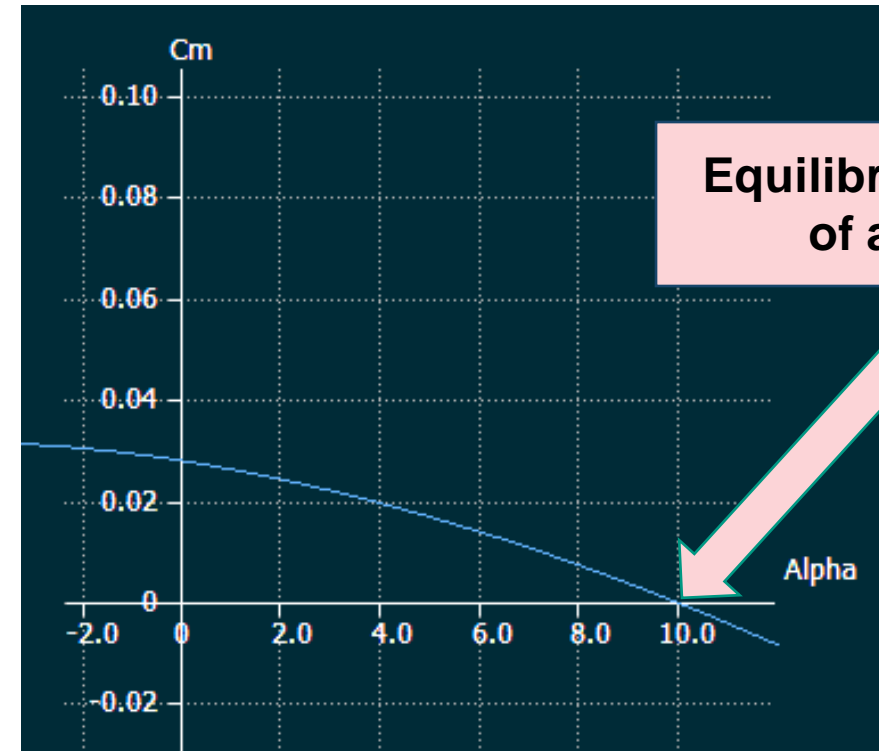


Coefficient of Moment Plot


Noah Wright

Redesigned Plane Analysis

CFD

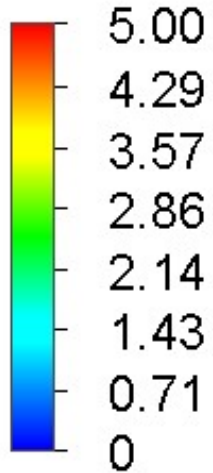

Turbulence Intensity [%]

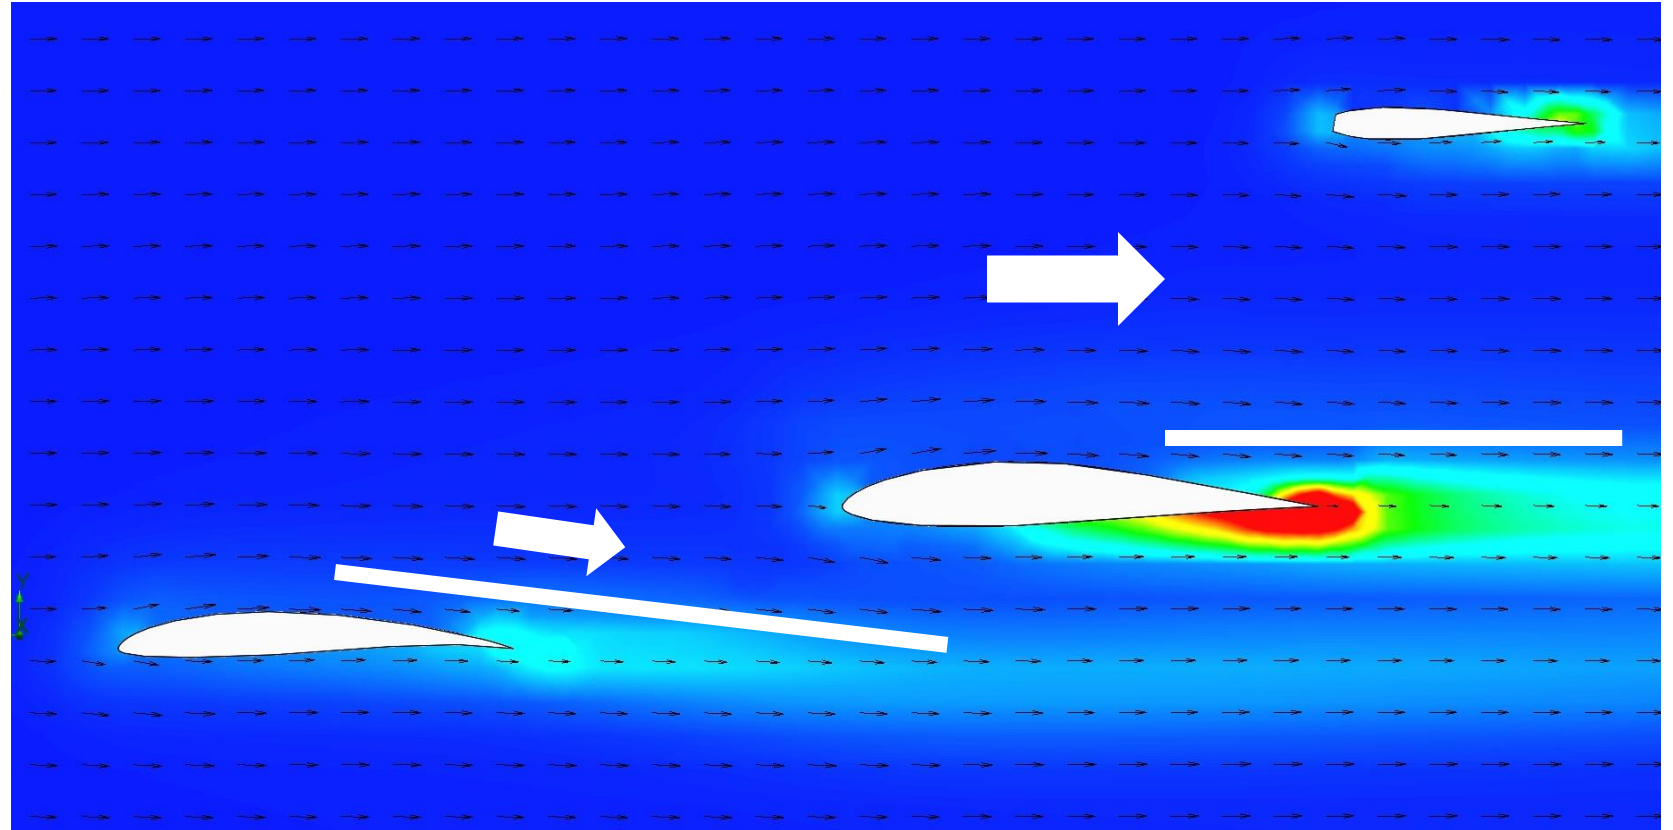


Negligible wake effects between wings

Adrian Moya


Redesigned Plane Analysis

CFD

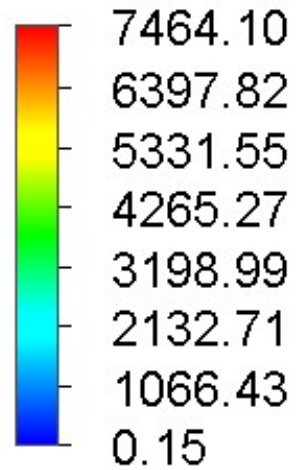

Vorticity [1/s]

Ground Effects

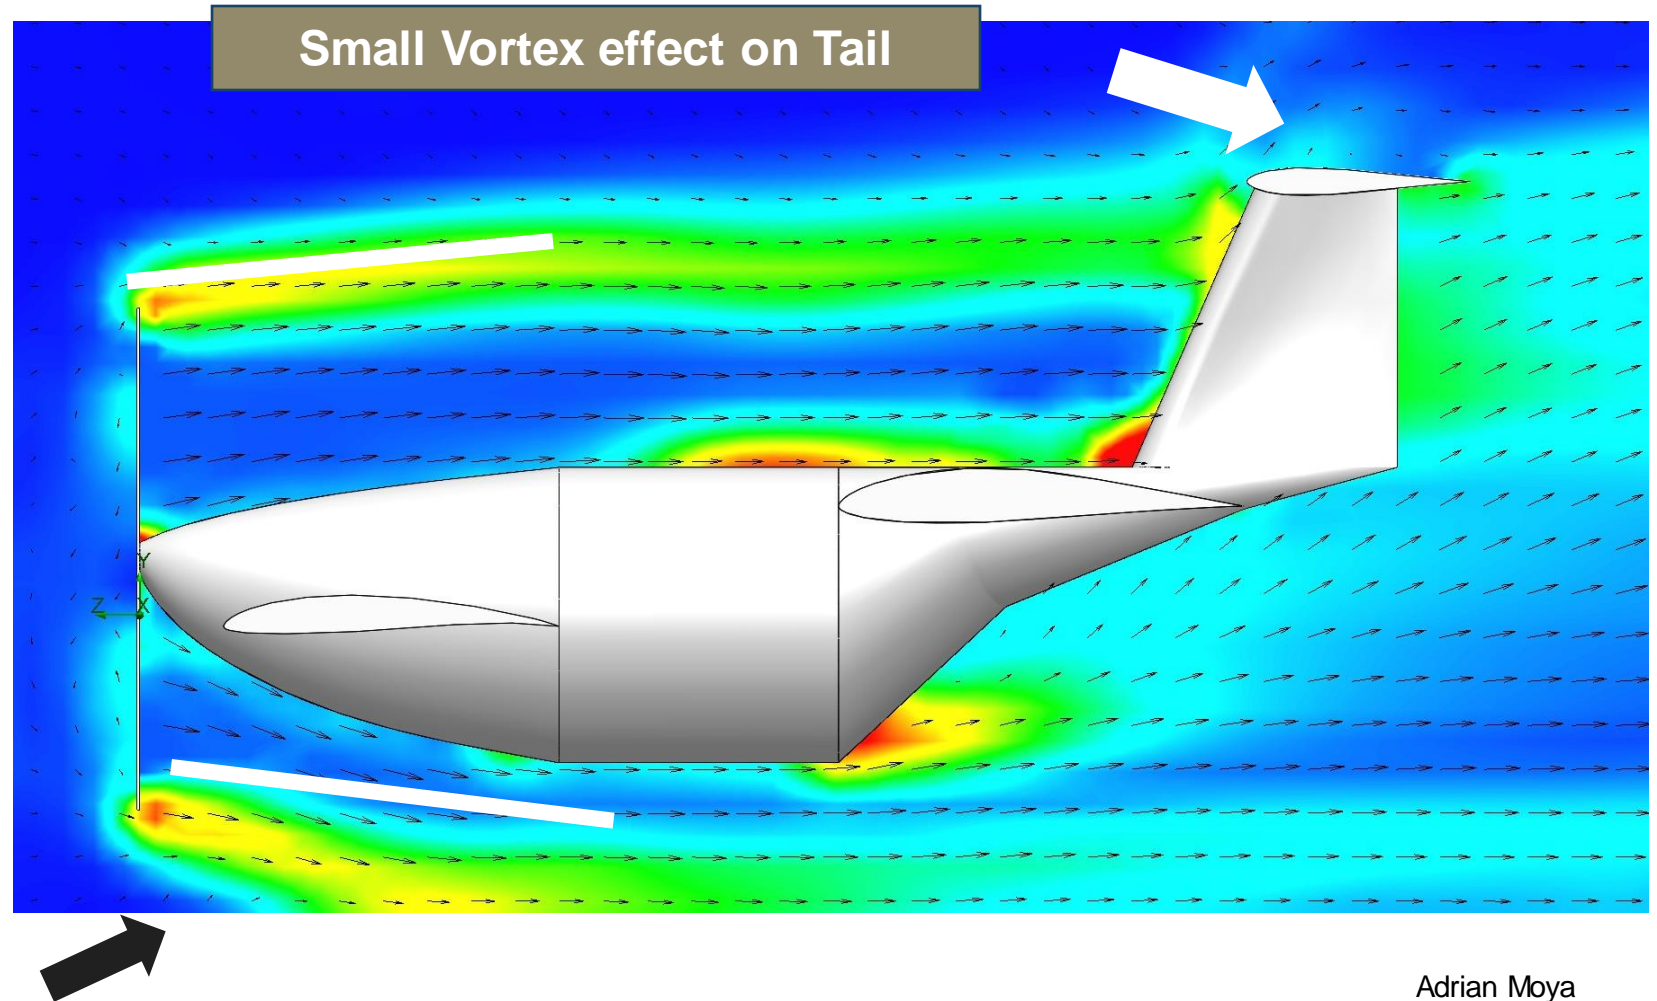



Adrian Moya

Validation and Electronics



Validation and Electronics

Wind Tunnel Test - Setup

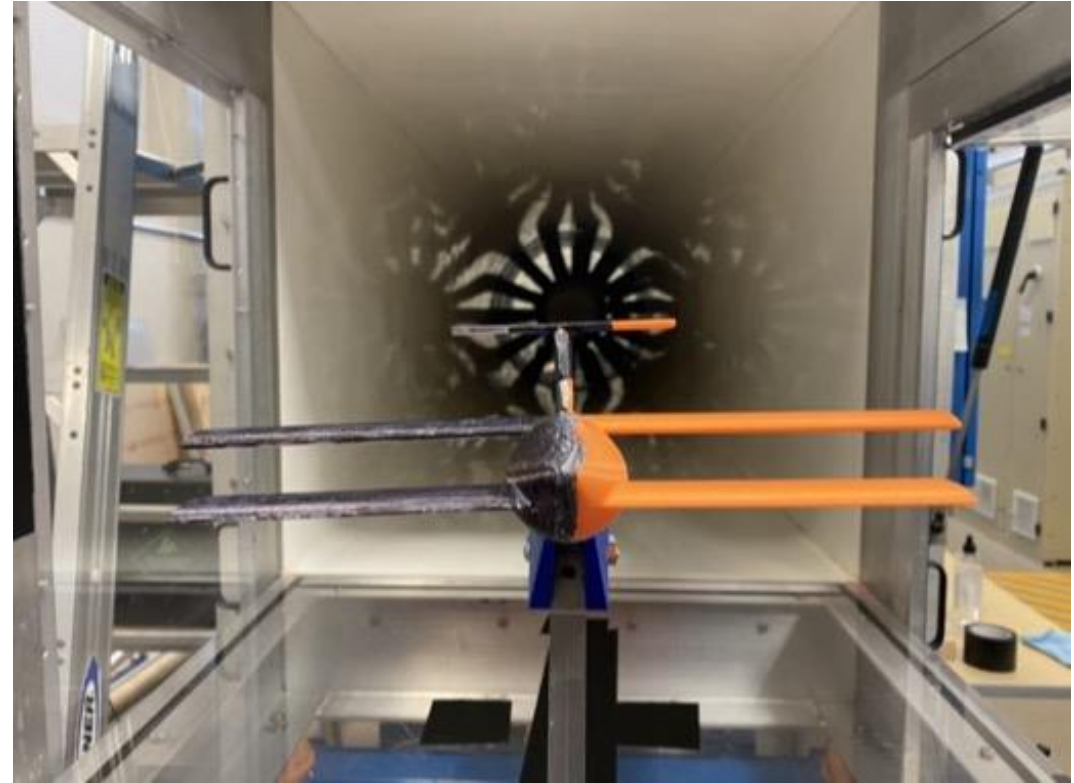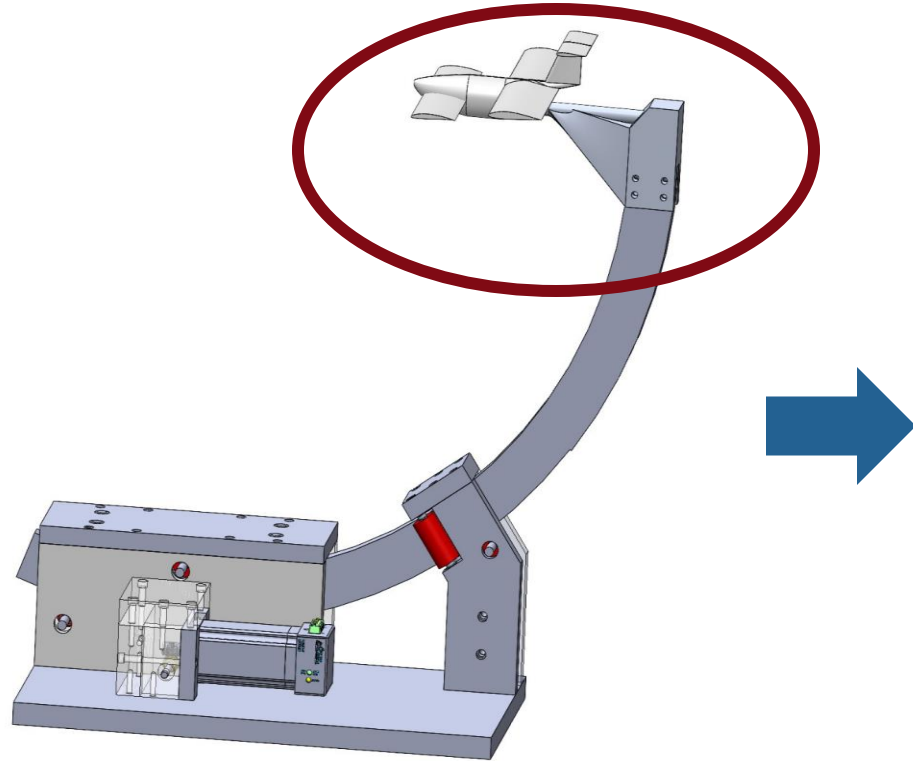

Michenell Louis-Charles

Validation and Electronics

Wind Tunnel Test – Smoke Test




Michenell Louis-Charles

Validation and Electronics


Air Flow – 0 deg AoA

CFD

Wind Tunnel Test

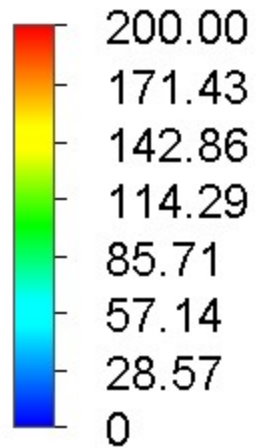

Vorticity [1/s]

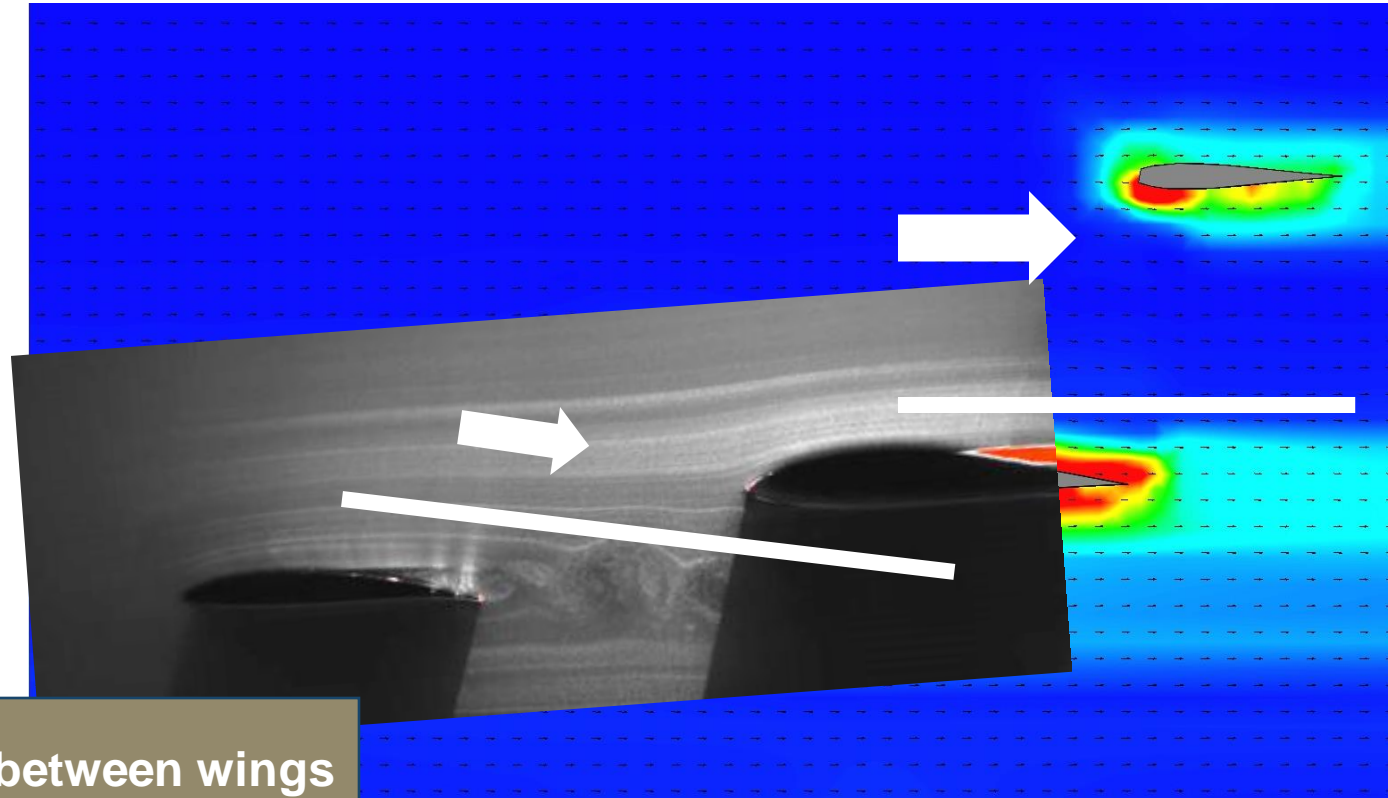


Negligible wake effects between wings

Michenell Louis-Charles

Validation and Electronics

Air Flow – 0 deg AoA

Wind Tunnel Test

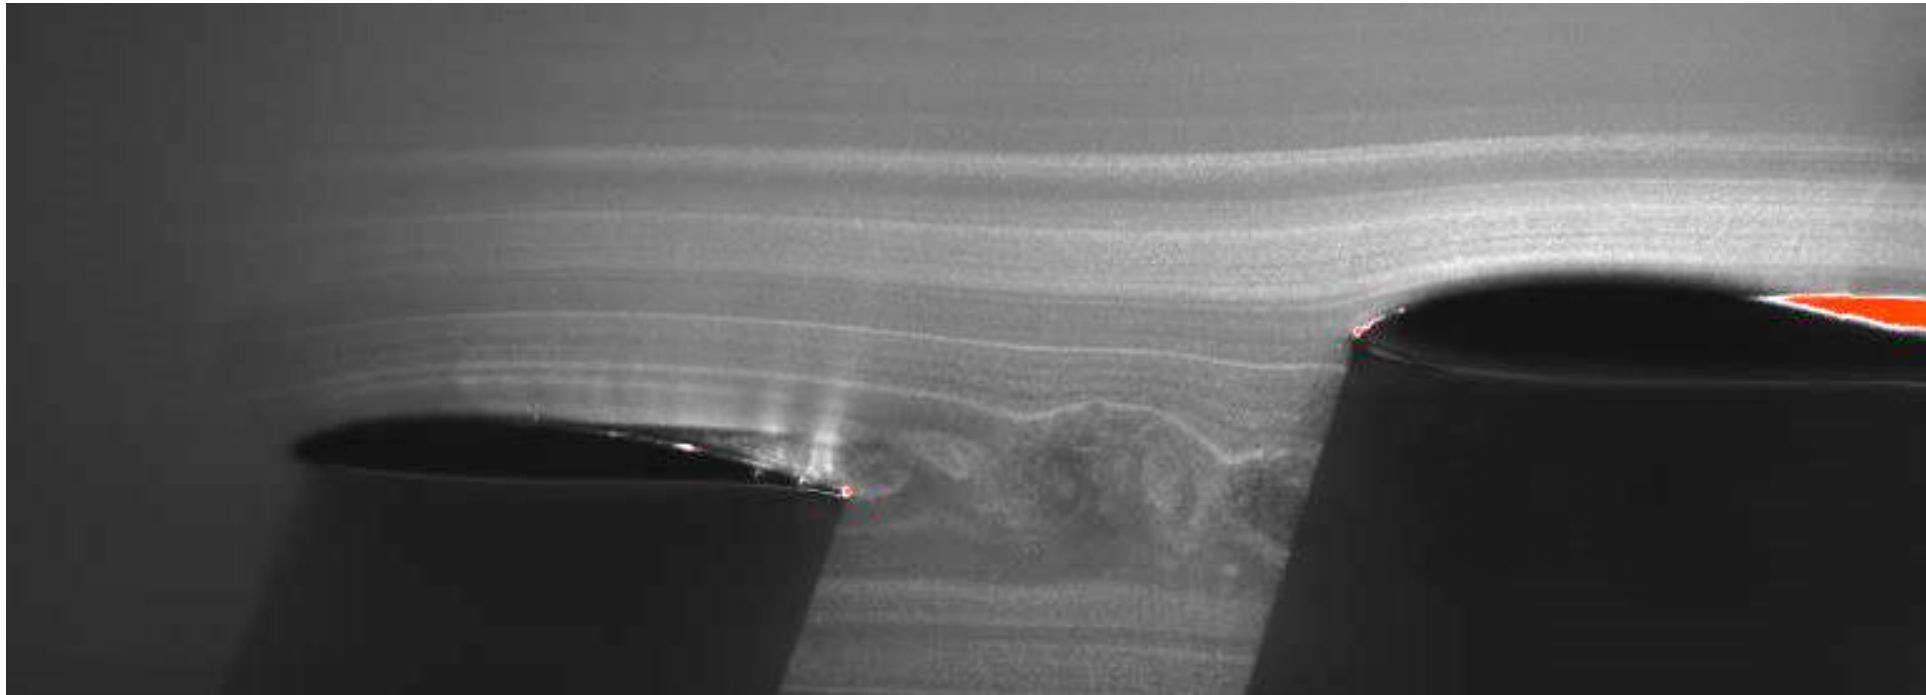

Negligible wake effects between wings


Michenell Louis-Charles

Validation and Electronics


Air Flow—5 deg AoA

CFD

Wind Tunnel Test

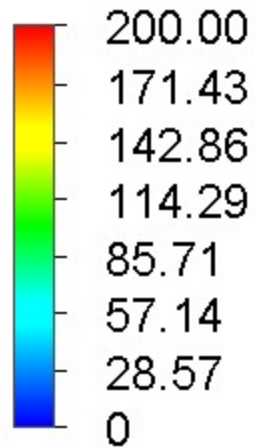

Vorticity [1/s]

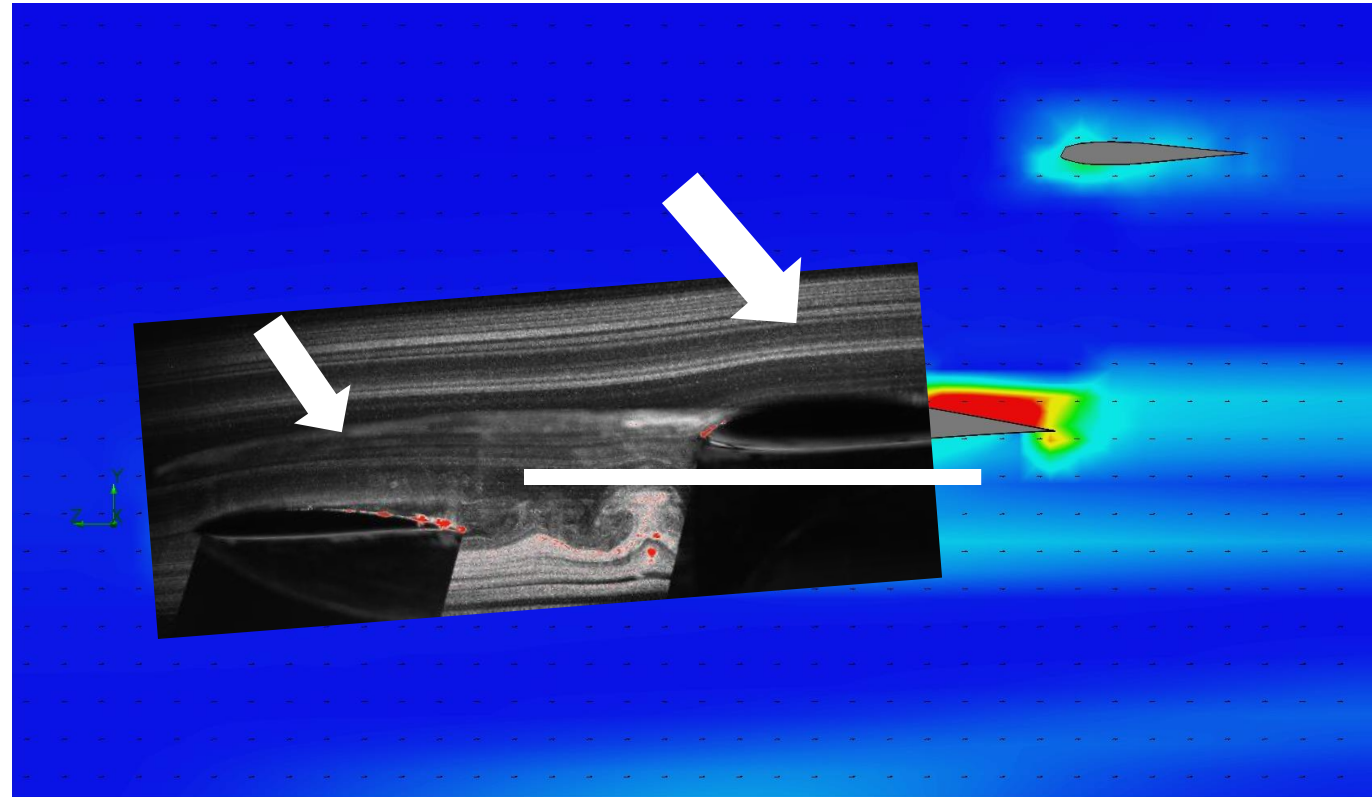


Flow Attached & No Wake

Michenell Louis-Charles

Validation and Electronics

Air Flow—5 deg AoA

Wind Tunnel Test

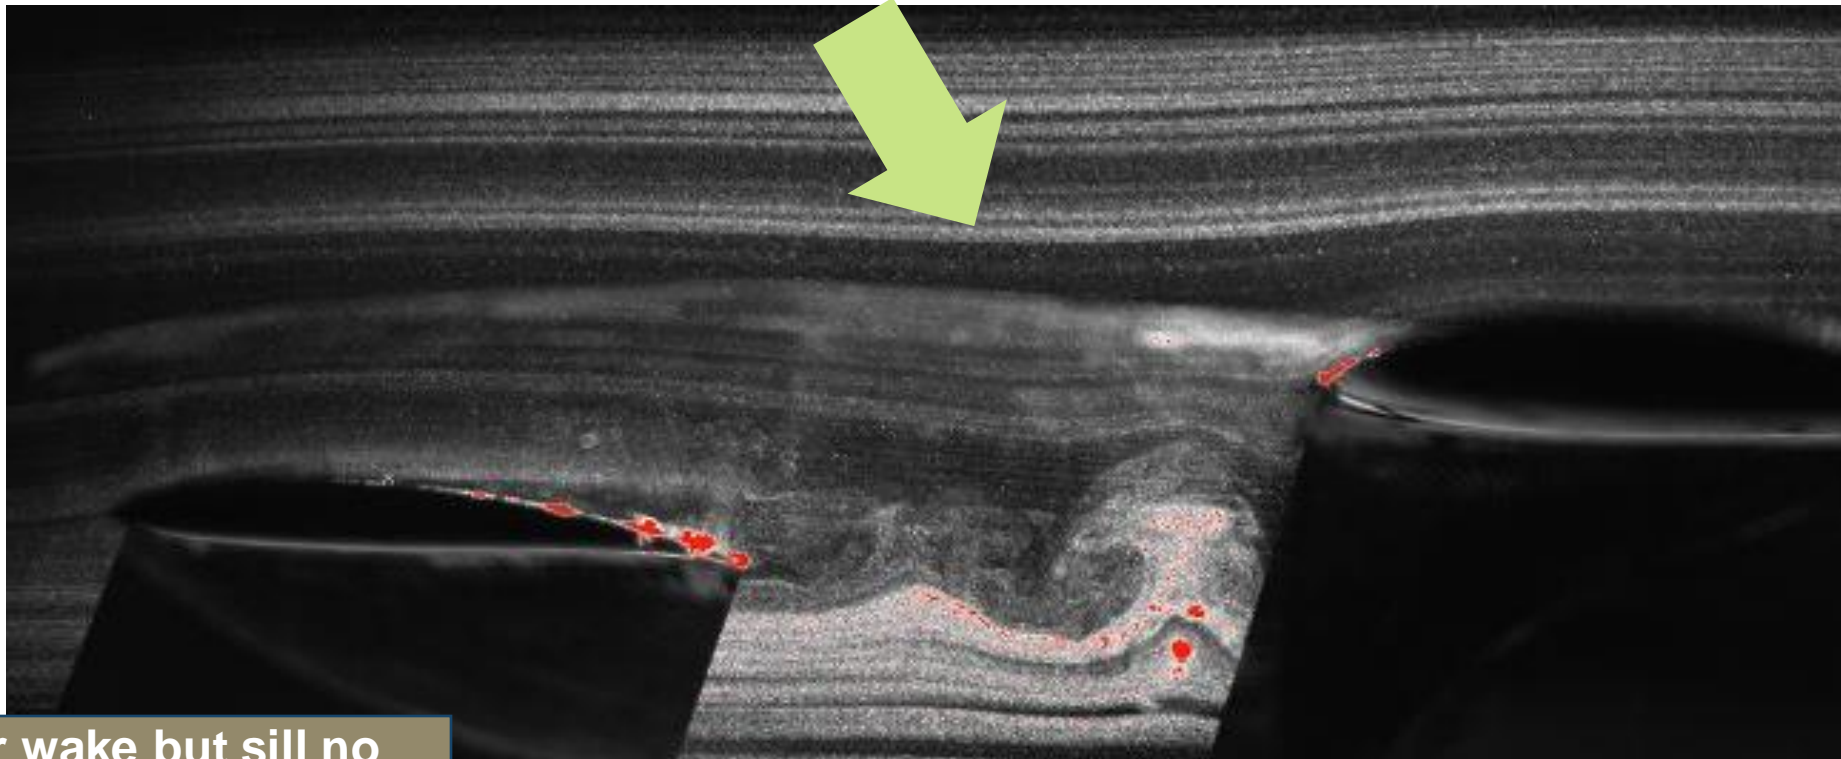

Larger wake but sill no interference


Michenell Louis-Charles

Validation and Electronics


Air Flow – 12 deg AoA

CFD

Wind Tunnel Test

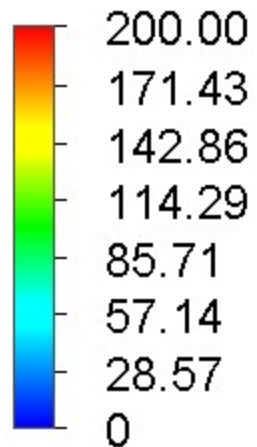

Vorticity [1/s]

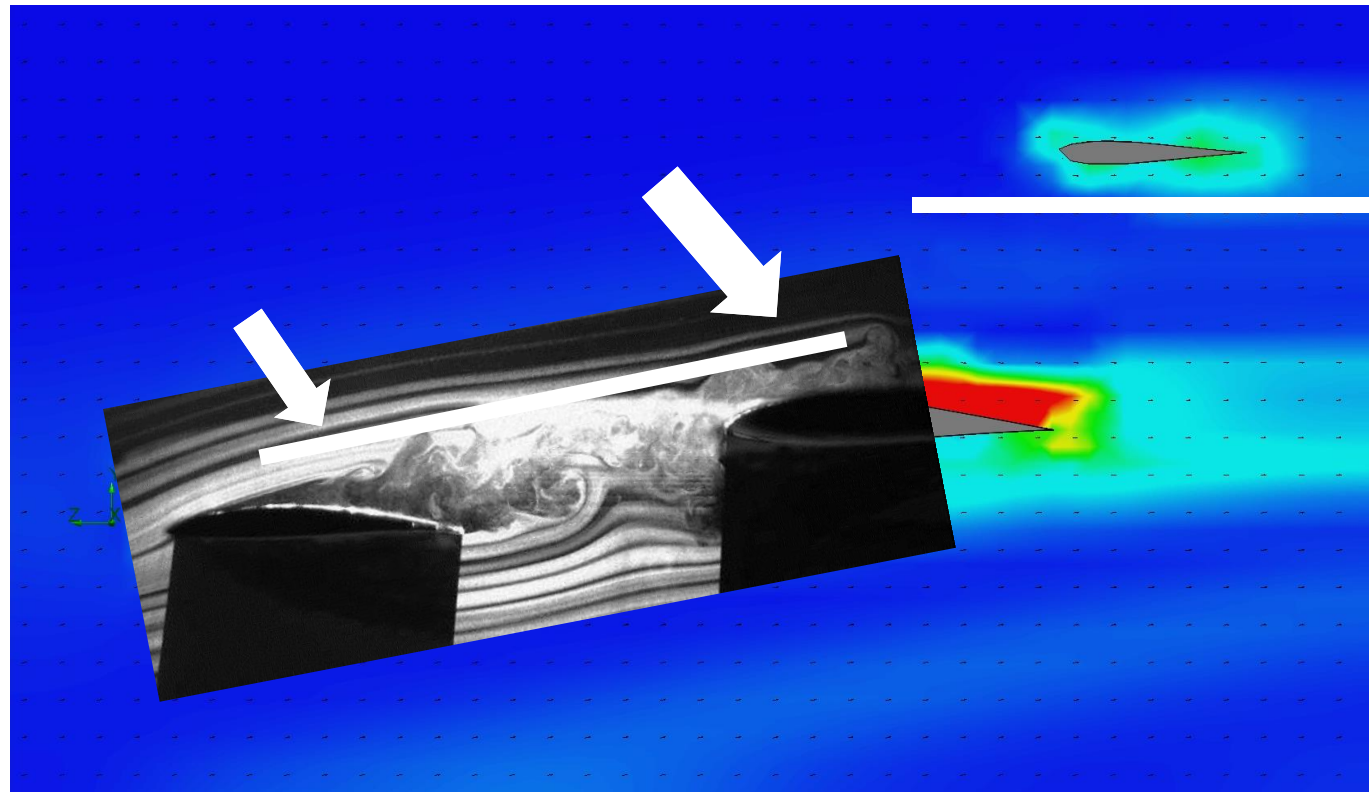


Stall occurs when flow separates from wings

Michenell Louis-Charles

Validation and Electronics

Air Flow – 12 deg AoA

Wind Tunnel Test

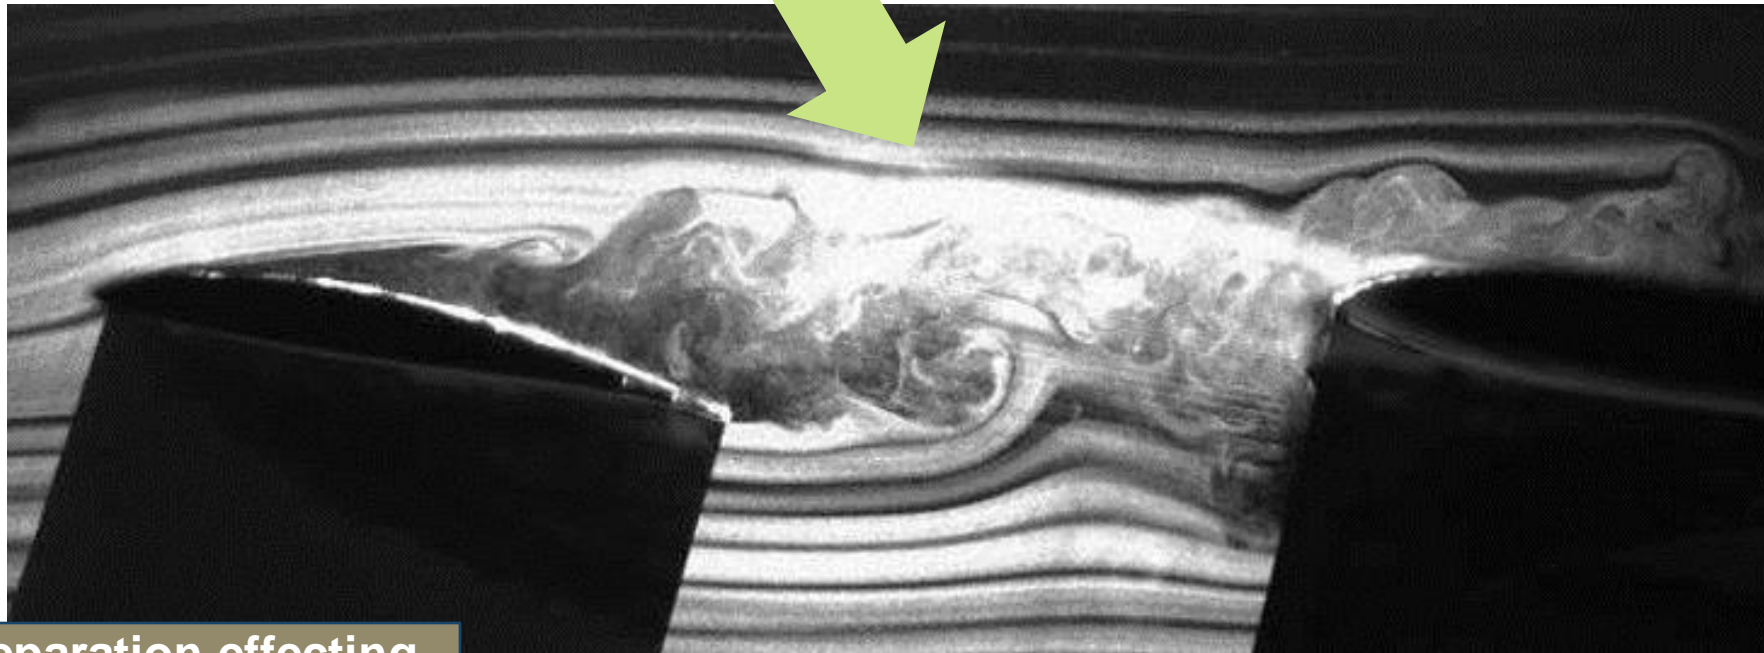

Flow separation effecting the main wing

Michenell Louis-Charles

Validation and Electronics

Controller Setup

Throttle (up/down)
Yaw (left/right)

Thrust-cut Button



Pitch (up/down)
Roll (left/right)

Programming the transmitter settings to
favor our plane

Cameron Riley

Validation and Electronics

Wiring

Method of splicing wires


Servo Extension Wires




Cameron Riley

Validation and Electronics

Assembly

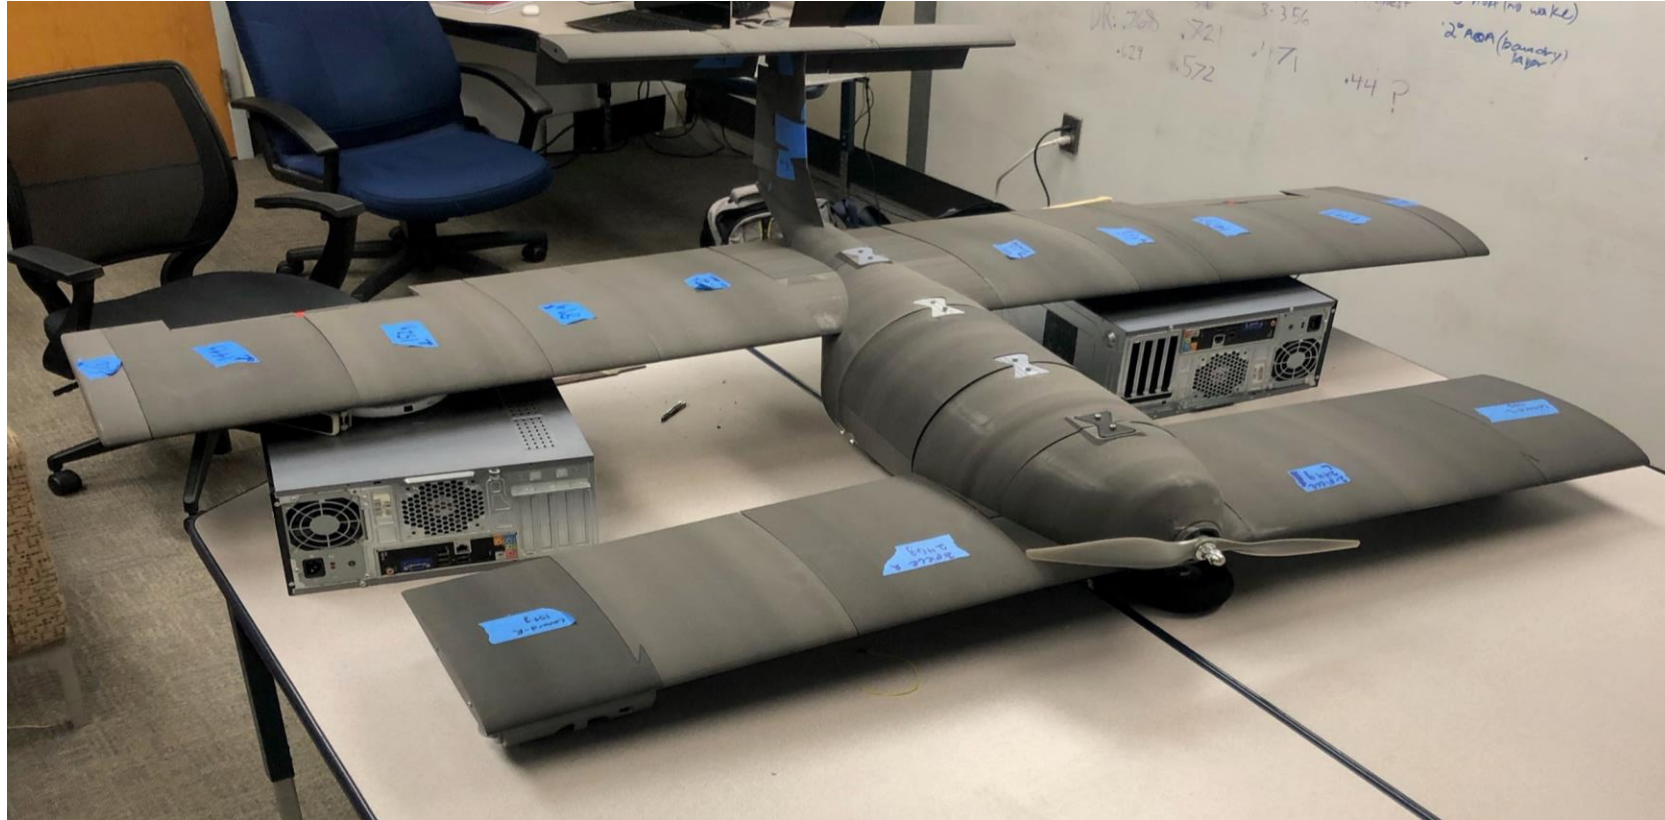

Cameron Riley



Current Work and Takeaways



Current Work and Takeaways

Assembly and Flight Info



✈ Tested control surface motion

✈ Tested Front wheel Motion

- Needs connection print

✈ Wiring and Assembly

✈ Test Flight at Cairo County Airport (With R/C Club Assistance)

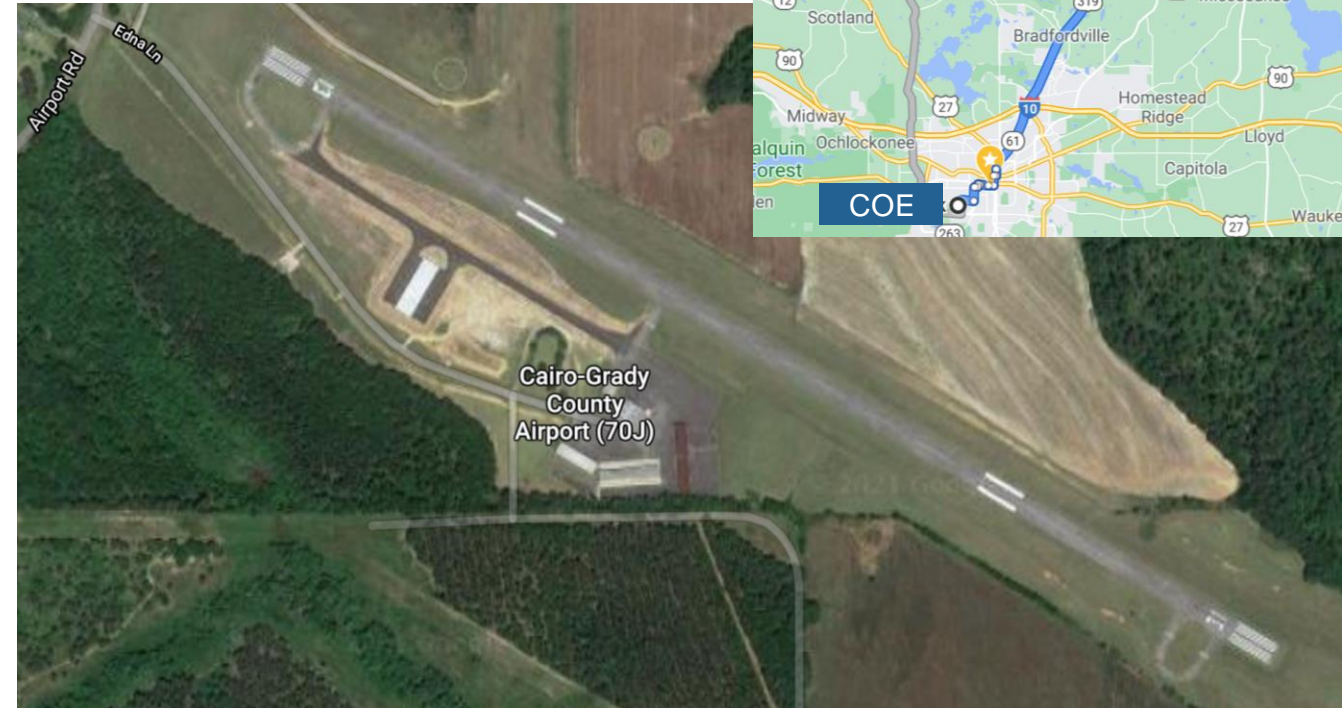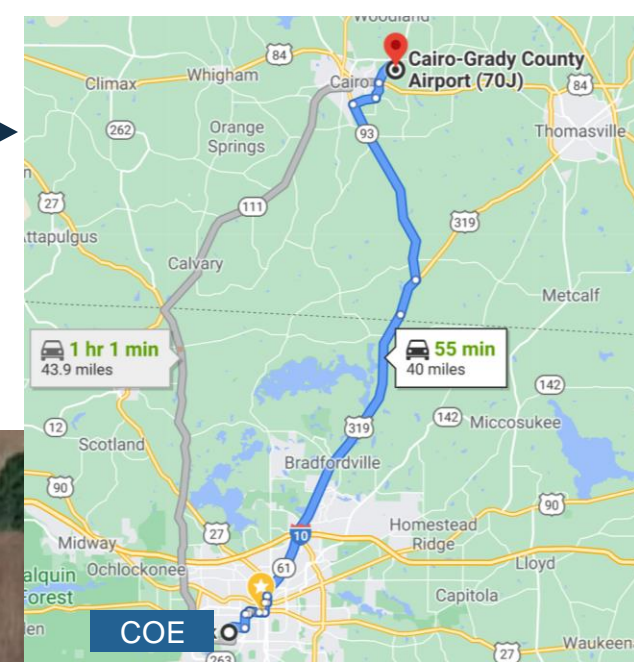


Michenell Louis-Charles

Current Work and Takeaways

Summary

- ✦ A Canard Design is possible
 - ✦ Tail wing needed for this layout
- ✦ Cargo bay between 2 major wings makes the plane stable
- ✦ Battery and cargo plate locations are adjustable to alter CG position
- ✦ Gear/belt mechanism used to operate control surfaces

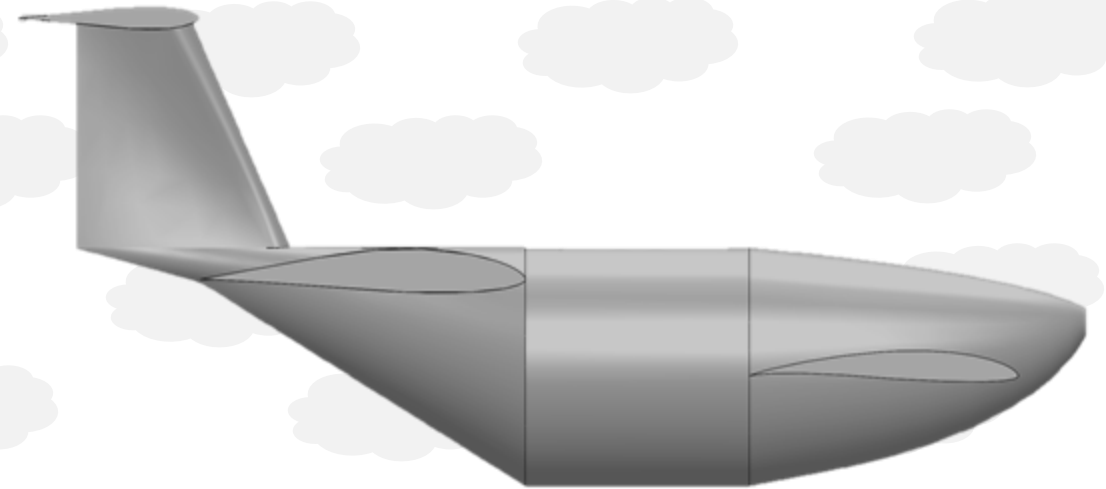


Adrian Moya

Current Work and Takeaways

Recommendations

- ✈ **Finalize a design and finish calculations by early December**
 - Test print to correlate density
- ✈ **Use optimization to find the best wing placements**
- ✈ **Contact Dr. Kumar about Stability Calculation**
 - Use Fund. Of Aero by J. Anderson for stability calculations
 - Use Systems Engineering Aircraft Design book by M. Sadraey
- ✈ **Test control surface motion setup early**
- ✈ **Contact R/C Club about plane design and control**

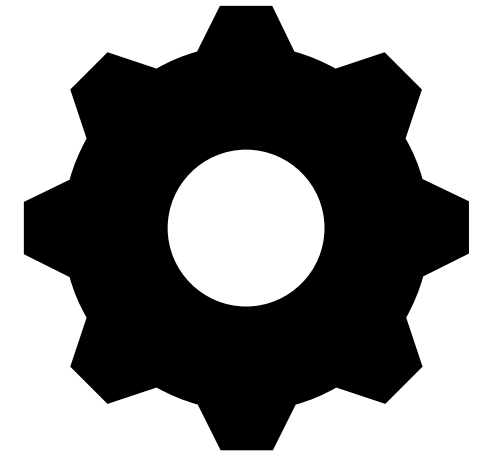

Adrian Moya

References

Aircraft Design: A Systems Engineering Approach. M.H. Sadraey. 2013. 1st Edition. John Wiley Publications.

Basics of RC Model Aircraft Design: Practical Techniques for building better models. A. Lennon. 1999. Air Age Inc.

Fundamentals of Aerodynamics. John D. Anderson Jr. 2011. 5th Edition. McGraw Hill Publications.

Fuselage Shapes. Academic. N.d. <https://enacademic.com/dic.nsf/enwiki/109692>

SAE Aero Design Competition 2021 Rule Book. Available on:
<https://public.3.basecamp.com/p/38Lpy4uyTLpNkwTZbtwjgtBZ>

Tail Types. What-When-How. N.d. <http://what-when-how.com/flight/tail-designs/>


Cameron Riley

LinkedIn Information

Sasindu Pinto




Cameron Riley



Michenell Louis-Charles



Noah Wright



Adrian Moya



Backup Slides

Old Design Info


PIV

FD/BPC

AHP

Math


Key Definitions

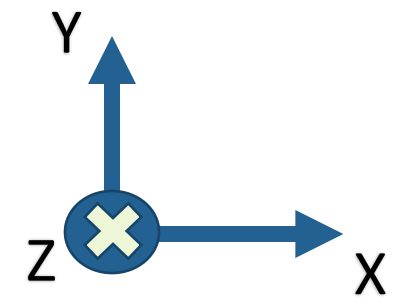

Camber

Mean Aerodynamic Length (MAL)


Mean Aerodynamic Center (MAC)

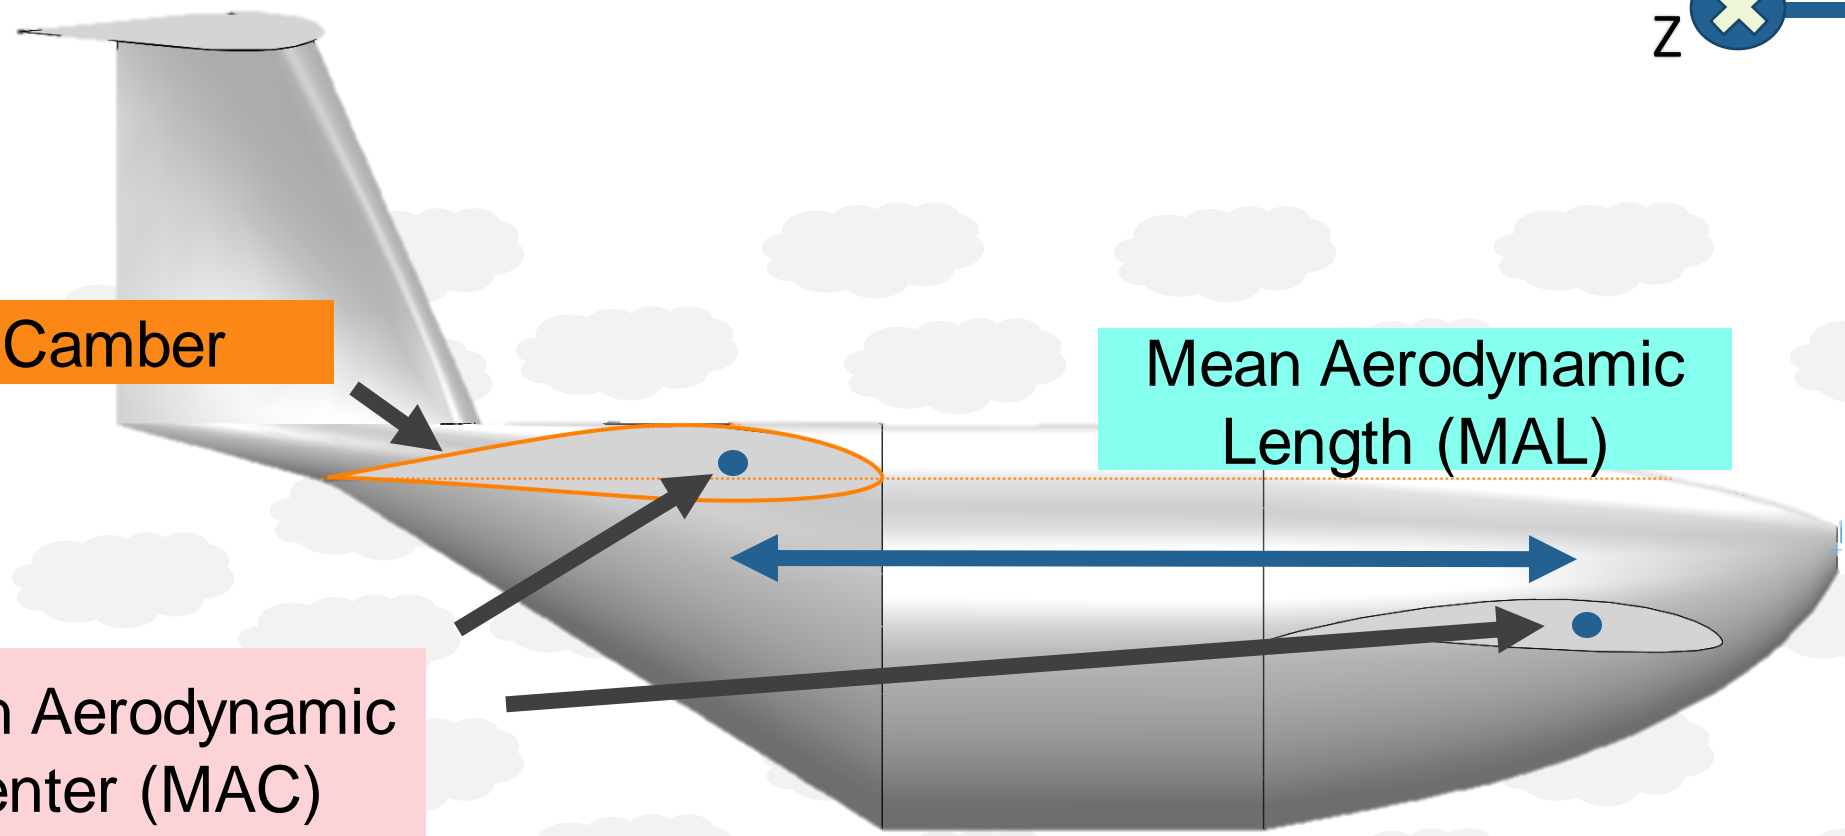


Noah Wright

Initial Design - Pitch Stability

Equilibrium Angle of Attack

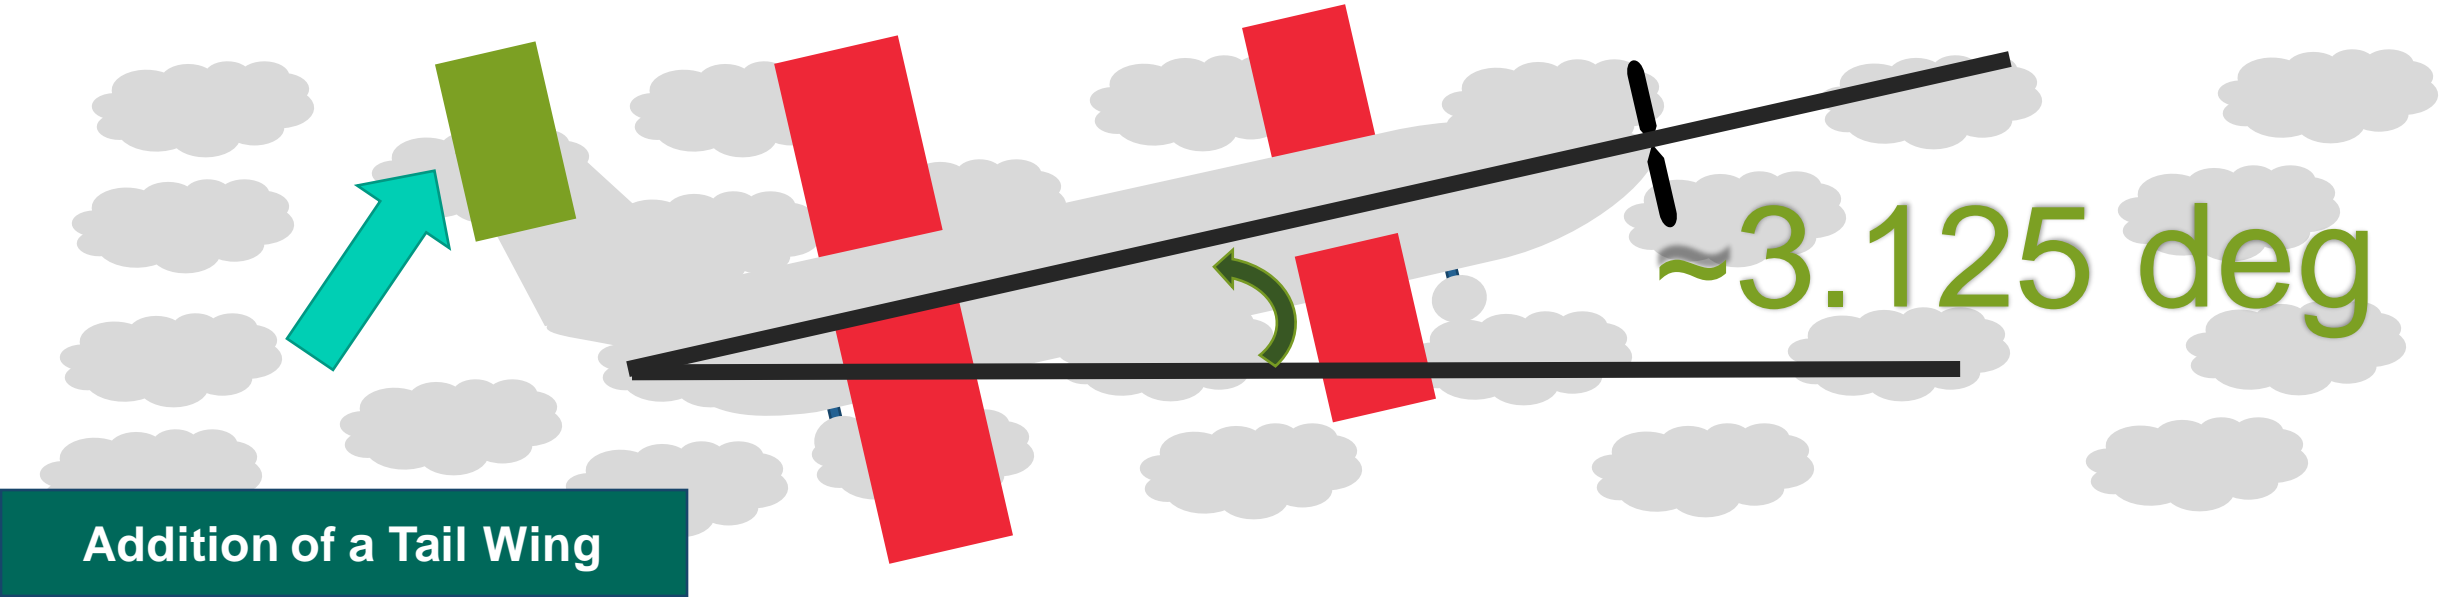


Initial Design - Roll Stability

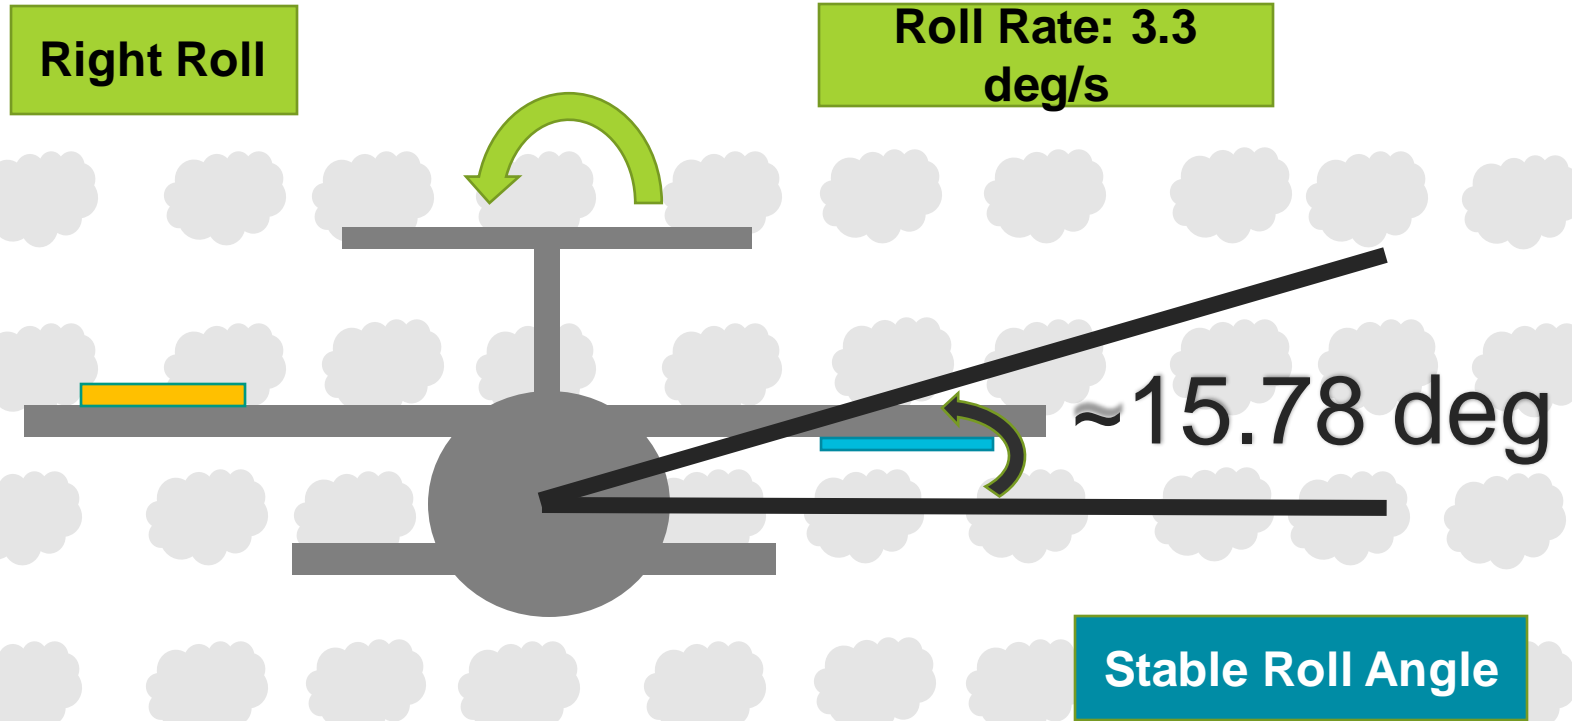

Yaw Stability – Operation

Landing Angle: 50 deg

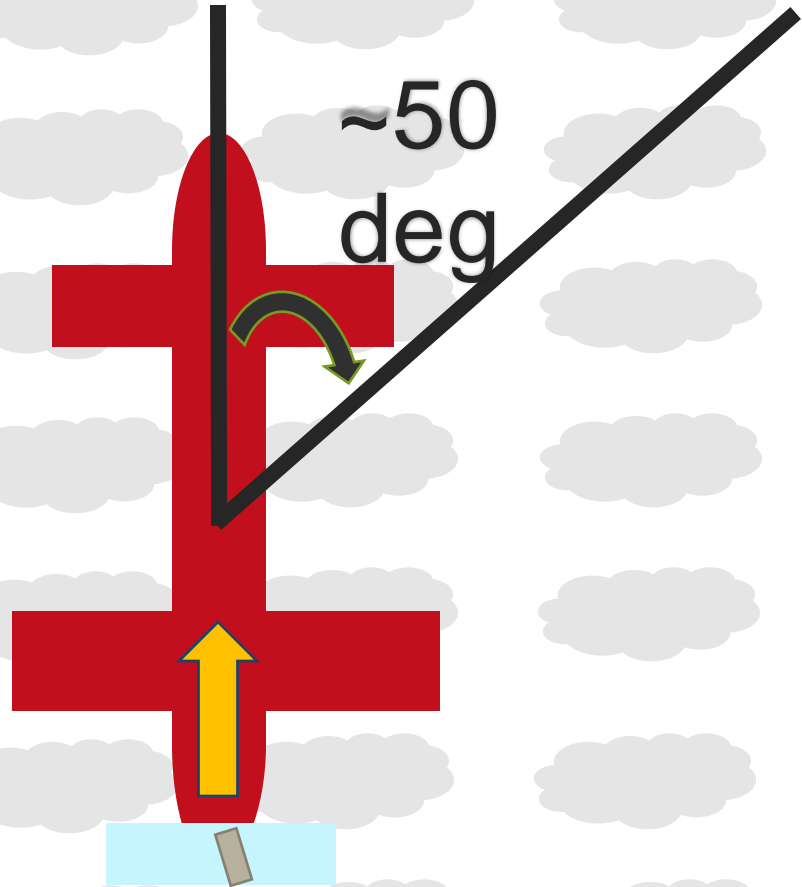


10 mph Cross Wind




Initial Design

CFD – Wing Turbulence




Turbulence Intensity [%]

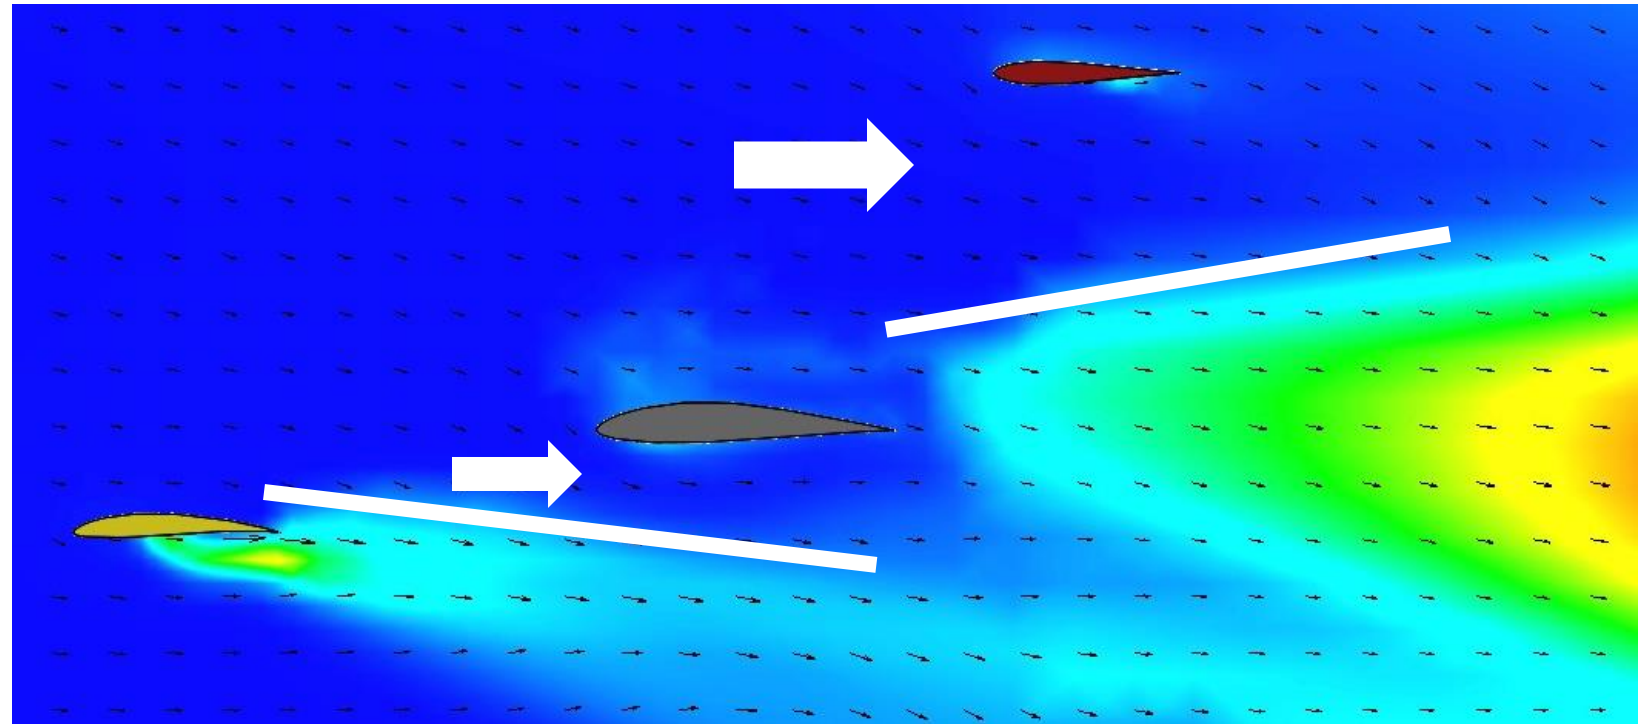

Initial Design Summary

Preliminary Design Analysis

- Equilibrium Angle – 3.125 deg
- Roll Stability at 15.78 deg
- Yaw Stability for 30 mph wind at 50 deg

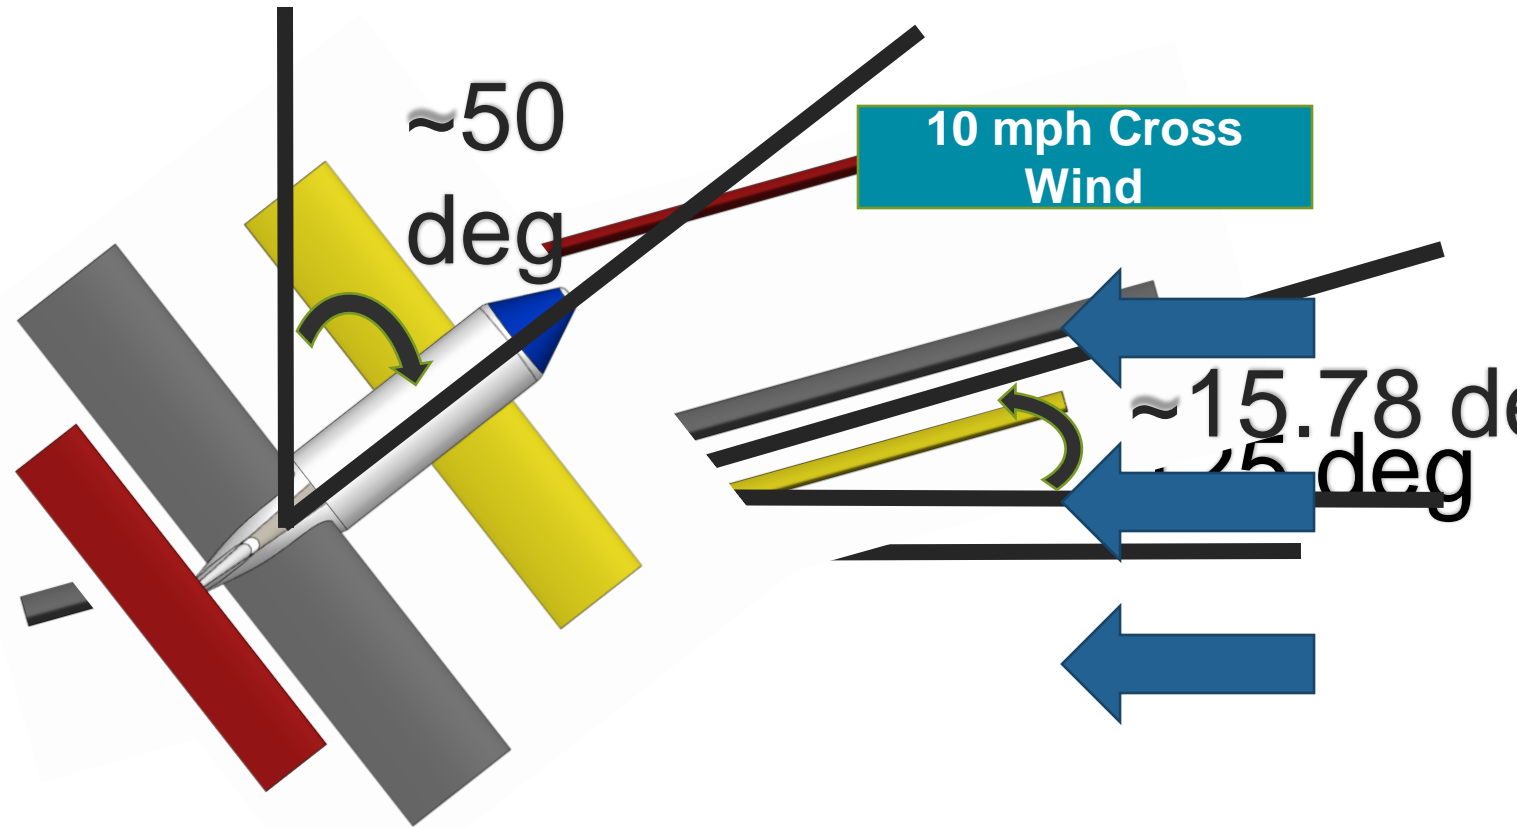


PIV Analysis

Wind Tunnel Test – PIV Test Video

Photosensitive Video


PIV Test

Wind Tunnel Test – PIV 0 deg

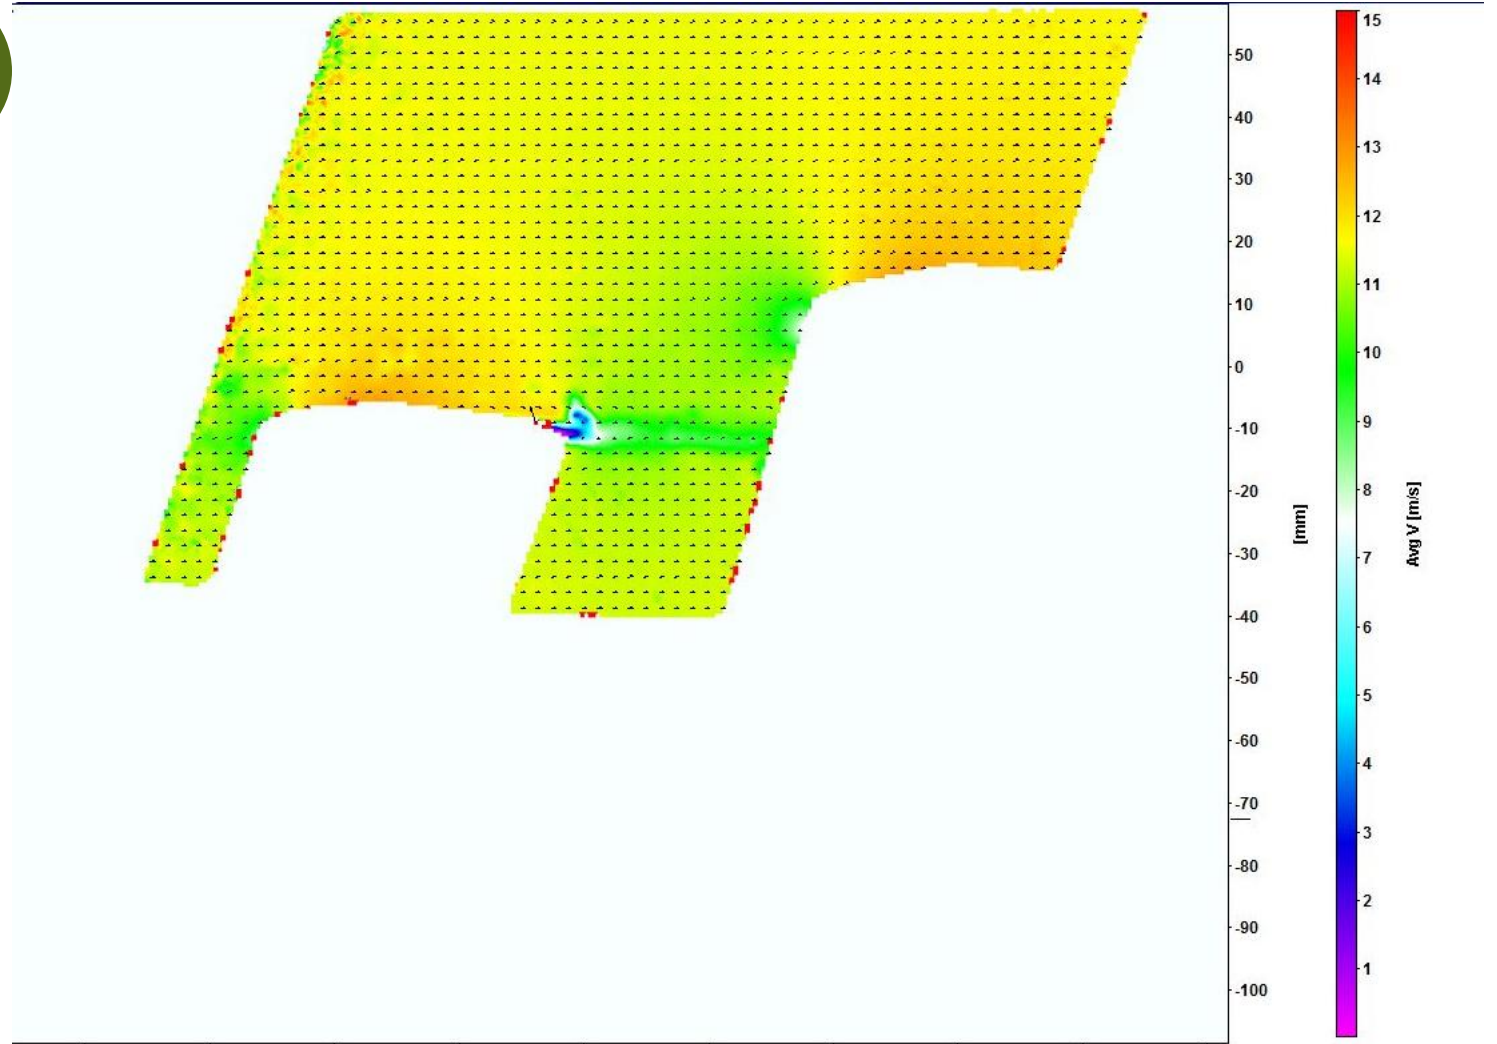


PIV Test

Wind Tunnel Test – PIV 5 deg

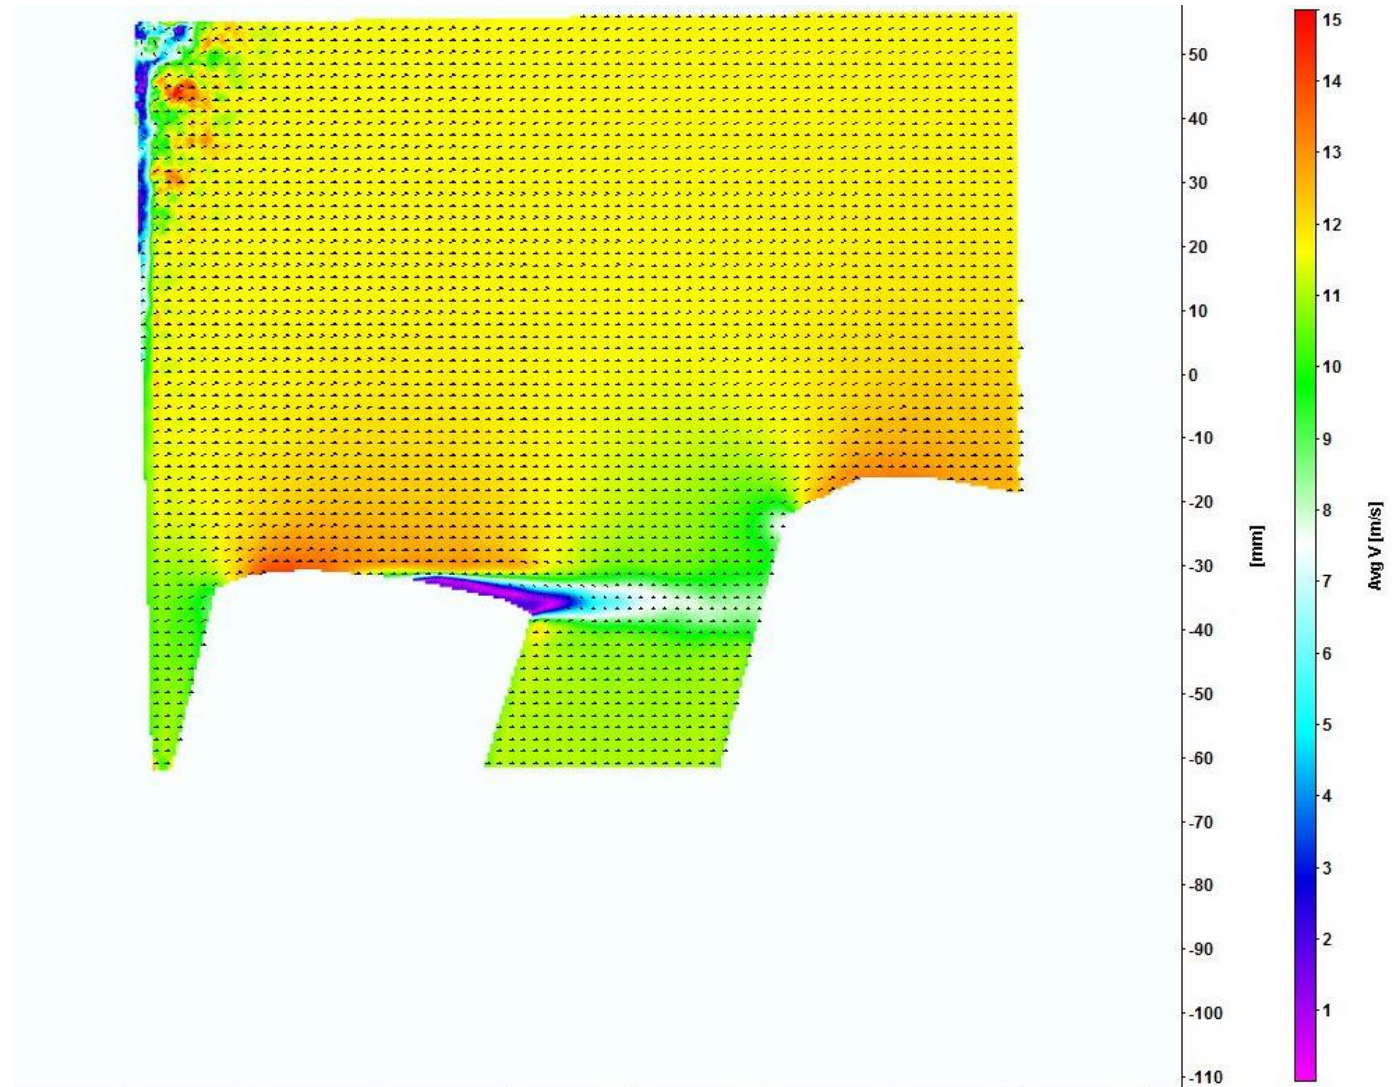


PIV Test

Wind Tunnel Test – PIV 12 deg

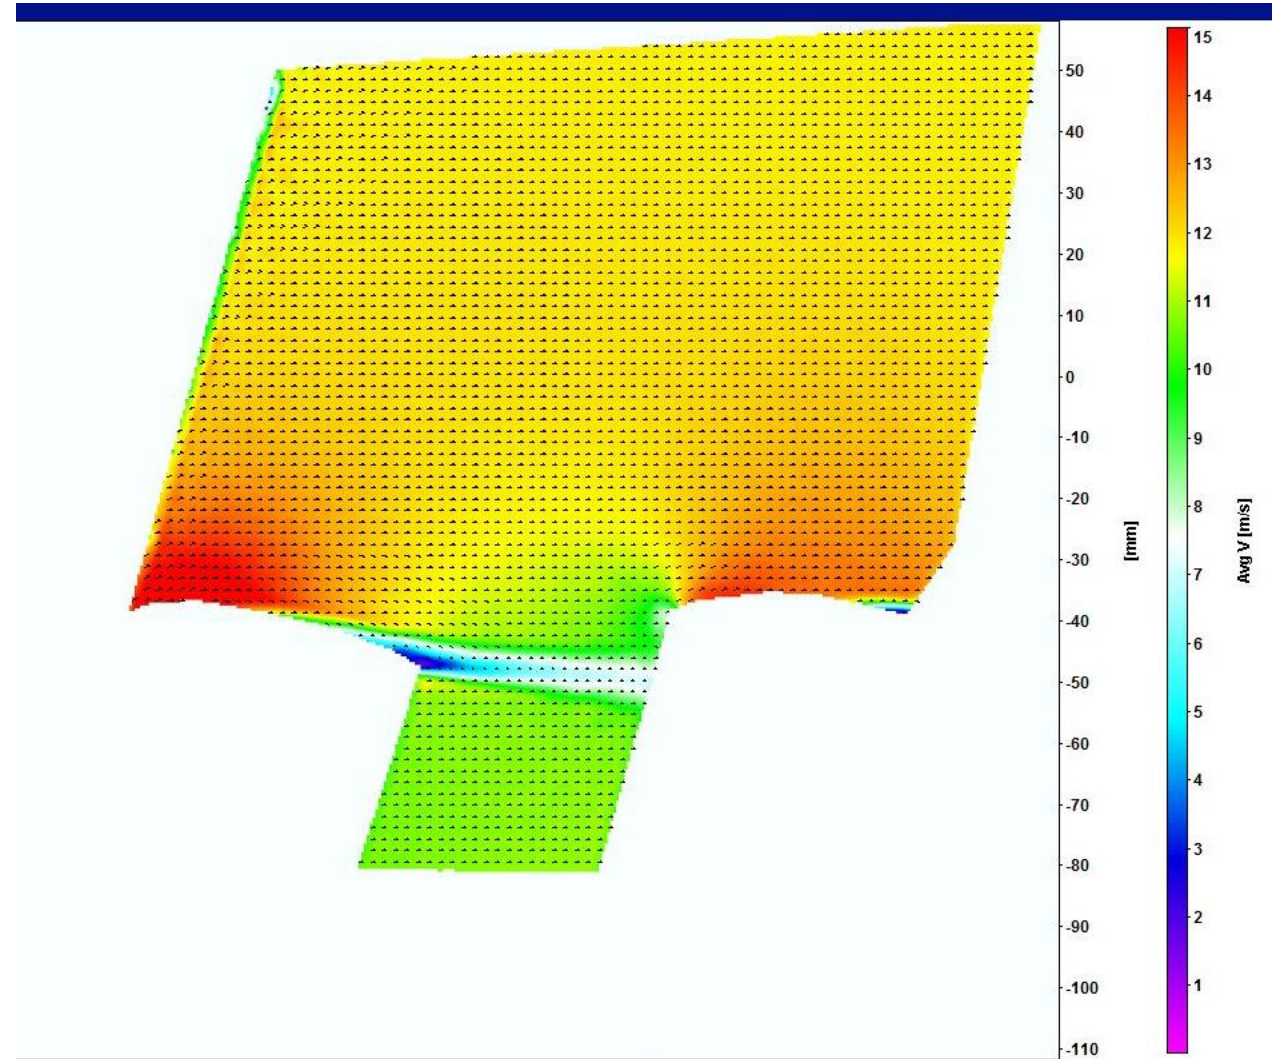

Functional Decomposition

Systems Chart

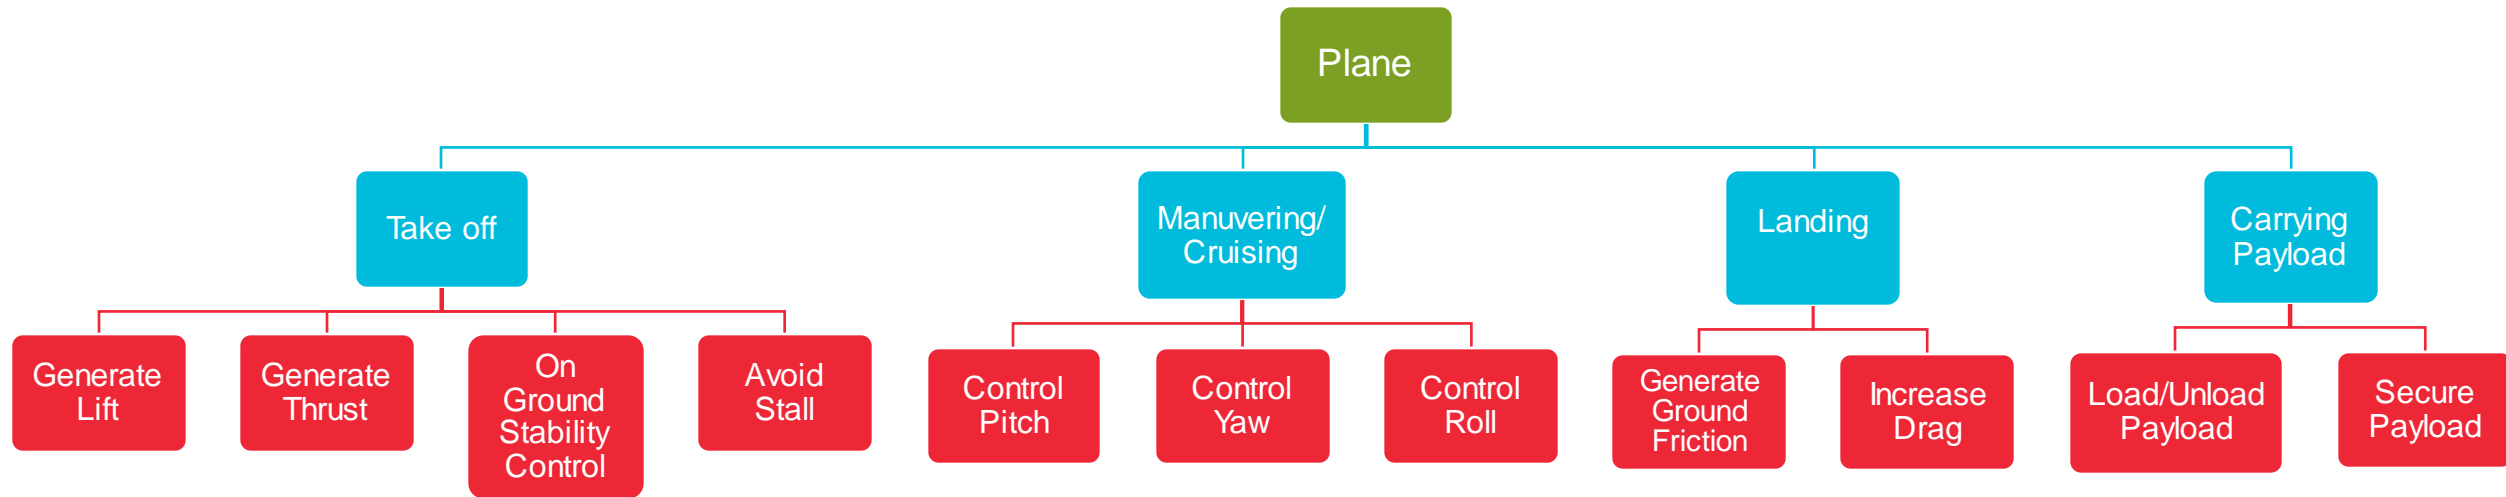

Concept Generation

Medium and High Fidelity


- Methods used
 - Morphological Analysis
 - Biomimicry
 - Competitive Benchmarking
 - Crapshoot



Concept Generation

Medium and High Fidelity

1. Boomtown

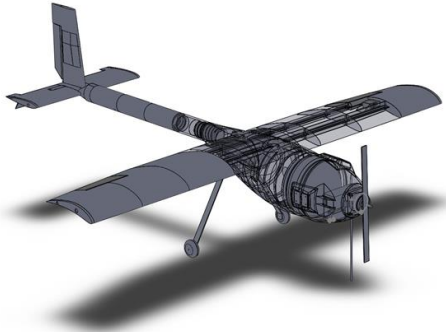

2. Rutan Long EZ



3. Rutan Quickie Q2



4. Boeing 747 Dreamlifter



5. Cessna 208
Grand Caravan



6. OMAC Laser 300



7. Aero Spacelines
Super Guppy



8. Kawasaki C-2



Binary Pairwise Comparison

Binary Pairwise Comparison													
	1	2	3	4	5	6	7	8	9	10	11	12	Total
1. Material	-	0	0	0	0	0	0	1	0	0	0	0	1
2. Stability	1	-	0	0	0	1	1	1	1	0	0	1	6
3. CG in front of CP	1	1	-	1	1	1	1	1	1	1	1	1	10
4. Meet takeoff/landing requirements	1	1	0	-	1	1	1	0	1	0	0	1	7
5. Wingspan meets restrictions	1	1	0	0	-	1	1	1	1	0	0	1	7
6. Sufficient Power	1	0	0	0	0	-	0	0	1	1	1	1	5
7. Maneuverability	1	0	0	0	0	1	-	0	1	0	0	1	4
8. Light Weight	0	0	0	1	0	1	1	-	1	1	0	1	6
9. Touch-down Impact	1	0	0	0	0	0	0	0	-	0	0	1	2
10. Ground Controls	1	1	0	1	1	0	1	0	1	-	1	1	7
11. Carry the Minimum Cargo Load Required	1	1	0	1	1	0	1	1	1	0	-	1	8
12. Easy to Load/Unload	1	0	0	0	0	0	0	0	0	0	0	-	1
Total	10	5	0	4	4	6	7	5	9	4	3	10	-

Presenter: AM



Binary Pairwise Comparison

Binary Pairwise Comparison													
	1	2	3	4	5	6	7	8	9	10	11	12	Total
1. Material	-	0	0	0	0	0	0	1	0	0	0	0	1
2. Stability	1	-	0	0	0	1	1	1	1	0	0	1	6
3. CG in front of CP	1	1	-	1	1	1	1	1	1	1	1	1	10
4. Meet takeoff/landing requirements	1	1	0	-	1	1	1	0	1	0	0	1	7
5. Wingspan meets restrictions	1	1	0	0	-	1	1	1	1	0	0	1	7
6. Sufficient Power	1	0	0	0	0	-	0	0	1	1	1	1	5
7. Maneuverability	1	0	0	0	0	1	-	0	1	0	0	1	4
8. Light Weight	0	0	0	1	0	1	1	-	1	1	0	1	6
9. Touch-down Impact	1	0	0	0	0	0	0	0	-	0	0	1	2
10. Ground Controls	1	1	0	1	1	0	1	0	1	-	1	1	7
11. Carry the Minimum Cargo Load Required	1	1	0	1	1	0	1	1	1	0	-	1	8
12. Easy to Load/Unload	1	0	0	0	0	0	0	0	0	0	0	-	1
Total	10	5	0	4	4	6	7	5	9	4	3	10	-

Presenter: AM



House of Quality

House of Quality														
Engineering Characteristics (**From Main Targets**)														
Improvement Direction		↑	↓	↑	↑	↑	↑	↑	↓	↓	↑	↑	=	
Units		lbf	lbf	lbf	degrees	ft/s	ft/s ²	degrees	seconds	lbs	ft/s ²	psi	psi	
Customer Requirements		Importance Weight Factor	Lift	Drag	Thrust	Max Angle of Attack	Stall Speed	Acceleration	Control Surface Movement	Loading/Unloading Time	Weight	Deceleration	Joint Strength	Material Strength
1. Material	1		1							9			9	9
2. Stability	6	9	3	3					9					
3. CG in front of CP	10	9	3	9	9	9			9	3				
4. Meet takeoff/landing requirements	7	9	3	9			9				9			
5. Wingspan meets restrictions	7	9	3		3	3			1				3	3
6. Sufficient Power	5	1	1	3			3		3		1	1		
7. Maneuverability	4				3	3			9		3		3	1
8. Light Weight	6	3		3			3				9	3		
9. Touch-down Impact	2								3		3	9	9	9
10. Ground Controls	7								1					
11. Carry the Minimum Cargo Load Required	8	9		3			3			9	9	3	9	9
12. Easy to Load/Unload	1									9	3		3	
Raw Score		365	96	228	123	123	120	215	81	191	128	135	124	
Relative Weight %		18.92	4.98	11.82	6.38	6.38	6.22	11.15	4.20	9.90	6.64	7.00	6.43	
Rank Order		1	11	2	6	6	10	3	12	4	8	5	9	

Presenter: SP



House of Quality

		House of Quality												
		Engineering Characteristics (**From Main Targets**)												
Improvement Direction		↑	↓	↑	↑	↑	↑	↑	↓	↓	↑	↑	=	
Units		lbf	lbf	lbf	degrees	ft/s	ft/s ²	degrees	seconds	lbs	ft/s ²	psi	psi	
Customer Requirements		Lift	Drag	Thrust	Max Angle of Attack	Stall Speed	Acceleration	Control Surface Movement	Loading/Unloading Time	Weight	Deceleration	Joint Strength	Material Strength	
Importance Weight Factor														
1. Material	1		1							9		9	9	
2. Stability	6	9	3	3				9						
3. CG in front of CP	10	9	3	9	9	9		9		3				
4. Meet takeoff/landing requirements	7	9	3	9			9				9			
5. Wingspan meets restrictions	7	9	3		3	3		1				3	3	
6. Sufficient Power	5	1	1	3			3	3		1	1			
7. Maneuverability	4				3	3		9		3		3	1	
8. Light Weight	6	3		3			3			9	3			
9. Touch-down Impact	2							3		3	9	9	9	
10. Ground Controls	7							1						
11. Carry the Minimum Cargo Load Required	8	9		3			3		9	9	3	9	9	
12. Easy to Load/Unload	1								9	3		3		
Raw Score		365	96	228	123	123	120	215	81	191	128	135	124	
Relative Weight %		18.92	4.98	11.82	6.38	6.38	6.22	11.15	4.20	9.90	6.64	7.00	6.43	
Rank Order		1	11	2	6	6	10	3	12	4	8	5	9	

Presenter: SP



House of Quality

House of Quality														
Engineering Characteristics (**From Main Targets**)														
Improvement Direction		↑	↓	↑	↑	↑	↑	↑	↓	↓	↑	↑	=	
Units		lbf	lbf	lbf	degrees	ft/s	ft/s ²	degrees	seconds	lbs	ft/s ²	psi	psi	
Customer Requirements		Importance Weight Factor	Lift	Drag	Thrust	Max Angle of Attack	Stall Speed	Acceleration	Control Surface Movement	Loading/Unloading Time	Weight	Deceleration	Joint Strength	Material Strength
1. Material	1		1							9			9	9
2. Stability	6	9	3	3					9					
3. CG in front of CP	10	9	3	9	9	9			9	3				
4. Meet takeoff/landing requirements	7	9	3	9			9				9			
5. Wingspan meets restrictions	7	9	3		3	3		1					3	3
6. Sufficient Power	5	1	1	3			3	3		1	1			
7. Maneuverability	4				3	3		9		3			3	1
8. Light Weight	6	3		3			3			9	3			
9. Touch-down Impact	2							3		3	9		9	9
10. Ground Controls	7							1						
11. Carry the Minimum Cargo Load Required	8	9		3			3			9	9	3	9	9
12. Easy to Load/Unload	1									9	3		3	
Raw Score		365	96	228	123	123	120	215	81	191	128	135	124	
Relative Weight %		18.92	4.98	11.82	6.38	6.38	6.22	11.15	4.20	9.90	6.64	7.00	6.43	
Rank Order		1	11	2	6	6	10	3	12	4	8	5	9	

Presenter: SP



House of Quality

House of Quality														
Engineering Characteristics (**From Main Targets**)														
Improvement Direction		↑	↓	↑	↑	↑	↑	↑	↓	↓	↑	↑	=	
Units		lbf	lbf	lbf	degrees	ft/s	ft/s ²	degrees	seconds	lbs	ft/s ²	psi	psi	
Customer Requirements		Importance Weight Factor	Lift	Drag	Thrust	Max Angle of Attack	Stall Speed	Acceleration	Control Surface Movement	Loading/Unloading Time	Weight	Deceleration	Joint Strength	Material Strength
1. Material	1		1							9			9	9
2. Stability	6	9	3	3					9					
3. CG in front of CP	10	9	3	9	9	9			9	3				
4. Meet takeoff/landing requirements	7	9	3	9			9				9			
5. Wingspan meets restrictions	7	9	3		3	3		1					3	3
6. Sufficient Power	5	1	1	3			3	3		1	1			
7. Maneuverability	4				3	3		9		3			3	1
8. Light Weight	6	3		3			3			9	3			
9. Touch-down Impact	2							3		3	9		9	9
10. Ground Controls	7							1						
11. Carry the Minimum Cargo Load Required	8	9		3			3			9	9	3	9	9
12. Easy to Load/Unload	1									9	3		3	
Raw Score		365	96	228	123	123	120	215	81	191	128	135	124	
Relative Weight %		18.92	4.98	11.82	6.38	6.38	6.22	11.15	4.20	9.90	6.64	7.00	6.43	
Rank Order		1	11	2	6	6	10	3	12	4	8	5	9	

Presenter: SP



House of Quality

House of Quality														
Engineering Characteristics (**From Main Targets**)														
Improvement Direction		↑	↓	↑	↑	↑	↑	↑	↓	↓	↑	↑	=	
Units		lbf	lbf	lbf	degrees	ft/s	ft/s ²	degrees	seconds	lbs	ft/s ²	psi	psi	
Customer Requirements		Importance Weight Factor	Lift	Drag	Thrust	Max Angle of Attack	Stall Speed	Acceleration	Control Surface Movement	Loading/Unloading Time	Weight	Deceleration	Joint Strength	Material Strength
1. Material	1		1										9	9
2. Stability	6	9	3	3					9					
3. CG in front of CP	10	9	3	9	9	9			9		3			
4. Meet takeoff/landing requirements	7	9	3	9			9					9		
5. Wingspan meets restrictions	7	9	3		3	3			1				3	3
6. Sufficient Power	5	1	1	3			3		3		1	1		
7. Maneuverability	4				3	3			9		3		3	1
8. Light Weight	6	3		3			3				9	3		
9. Touch-down Impact	2								3		3	9	9	9
10. Ground Controls	7								1					
11. Carry the Minimum Cargo Load Required	8	9		3			3			9	9	3	9	9
12. Easy to Load/Unload	1									9	3		3	
Raw Score		365	96	228	123	123	120	215	81	191	128	135	124	
Relative Weight %		18.92	4.98	11.82	6.38	6.38	6.22	11.15	4.20	9.90	6.64	7.00	6.43	
Rank Order		1	11	2	6	6	10	3	12	4	8	5	9	

Presenter: SP



House of Quality

House of Quality														
Engineering Characteristics (**From Main Targets**)														
Improvement Direction		↑	↓	↑	↑	↑	↑	↑	↓	↓	↑	↑	=	
Units		lbf	lbf	lbf	degrees	ft/s	ft/s^2	degrees	seconds	lbs	ft/s^2	psi	psi	
Customer Requirements		Importance Weight Factor	Lift	Drag	Thrust	Max Angle of Attack	Stall Speed	Acceleration	Control Surface Movement	Loading/Unloading Time	Weight	Deceleration	Joint Strength	Material Strength
1. Material	1		1							9			9	9
2. Stability	6	9	3	3					9					
3. CG in front of CP	10	9	3	9	9	9			9	3				
4. Meet takeoff/landing requirements	7	9	3	9			9				9			
5. Wingspan meets restrictions	7	9	3		3	3			1				3	3
6. Sufficient Power	5	1	1	3			3		3		1	1		
7. Maneuverability	4				3	3			9		3		3	1
8. Light Weight	6	3		3			3				9	3		
9. Touch-down Impact	2								3		3	9	9	9
10. Ground Controls	7								1					
11. Carry the Minimum Cargo Load Required	8	9		3			3			9	9	3	9	9
12. Easy to Load/Unload	1									9	3		3	
Raw Score		365	96	228	127	123	12	215	81	191	128	135	124	
Relative Weight %		18.92	4.98	11.82	6.3	6.38	6.22	11.15	4.20	9.90	6.64	7.00	6.43	
Rank Order		1	11	2	6	5	10	3	12	4	8	5	9	

6.75

Presenter: SP

Pugh Chart 1


Pugh Chart 1		Concepts							
		High			Medium				
Selection Criteria	2020 Competition Entry	1	2	3	4	5	6	7	8
Lift	DATUM	+	+	+	-	-	+	-	-
Thrust		S	S	S	S	S	S	S	S
Control Surface Movement		+	+	+	+	S	+	S	S
Weight		-	S	-	-	-	S	-	S
Joint Strength		+	+	+	+	+	+	+	+
# of pluses		3	3	3	2	1	3	1	1
# of S's		1	2	1	1	2	2	2	3
# of Minuses	1	0	1	2	2	0	1	1	

Presenter: SP



Pugh Chart 1

Pugh Chart 1		Concepts	
		High	Medium
Selection Criteria	2020 Competition Entry		
Lift	DATUM		
Thrust			
Control Surface Movement			
Weight			
Joint Strength			
# of pluses			
# of S's			
# of Minuses		1 0 1 2 2 0 1 1	

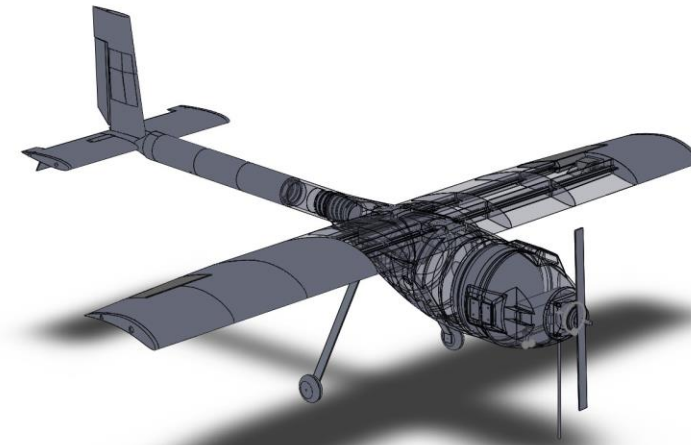

Presenter: SP

Pugh Chart 1

Pugh Chart 1		Concepts							
		High			Medium				
Selection Criteria	2020 Competition Entry	1	2	3	4	5	6	7	8
Lift	DATUM	+	+	+	-	-	+	-	-
Thrust		S	S	S	S	S	S	S	S
Control Surface Movement		+	+	+	+	S	+	S	S
Weight		-	S	-	-	-	S	-	S
Joint Strength		+	+	+	+	+	+	+	+
# of pluses		3	3	3	2	1	3	1	1
# of S's		1	2	1	1	2	2	2	3
# of Minuses	1	0	1	2	2	0	1	1	

Presenter: SP



Pugh Chart 2

Pugh Chart 2		Concepts		
		High	Medium	
Selection Criteria	Concept 2	1	3	6
Lift	Datum	-	+	-
Thrust		S	S	S
Control Surface Movement		+	+	+
Weight		-	-	-
Joint Strength		S	S	S
# of pluses		1	2	1
# of S's		2	2	2
# of Minuses	2	1	2	

Presenter: SP

Pugh Chart 2

Pugh Chart 2		Concepts		
		High	Medium	
Selection Criteria	Concept 2	1	3	6
Lift	Datum	-	+	-
Thrust		S	S	S
Control Surface Movement		+	+	+
Weight		-	-	-
Joint Strength		S	S	S
# of pluses		1	2	1
# of S's		2	2	2
# of Minuses	2	1	2	

Presenter: SP



AHP Slides

Comparison

Lift

Thrust

Control
Surfaces

Weights


Joint Strength

AHP Criteria Comparison



Criteria Comparison - AHP

Lift vs Thrust

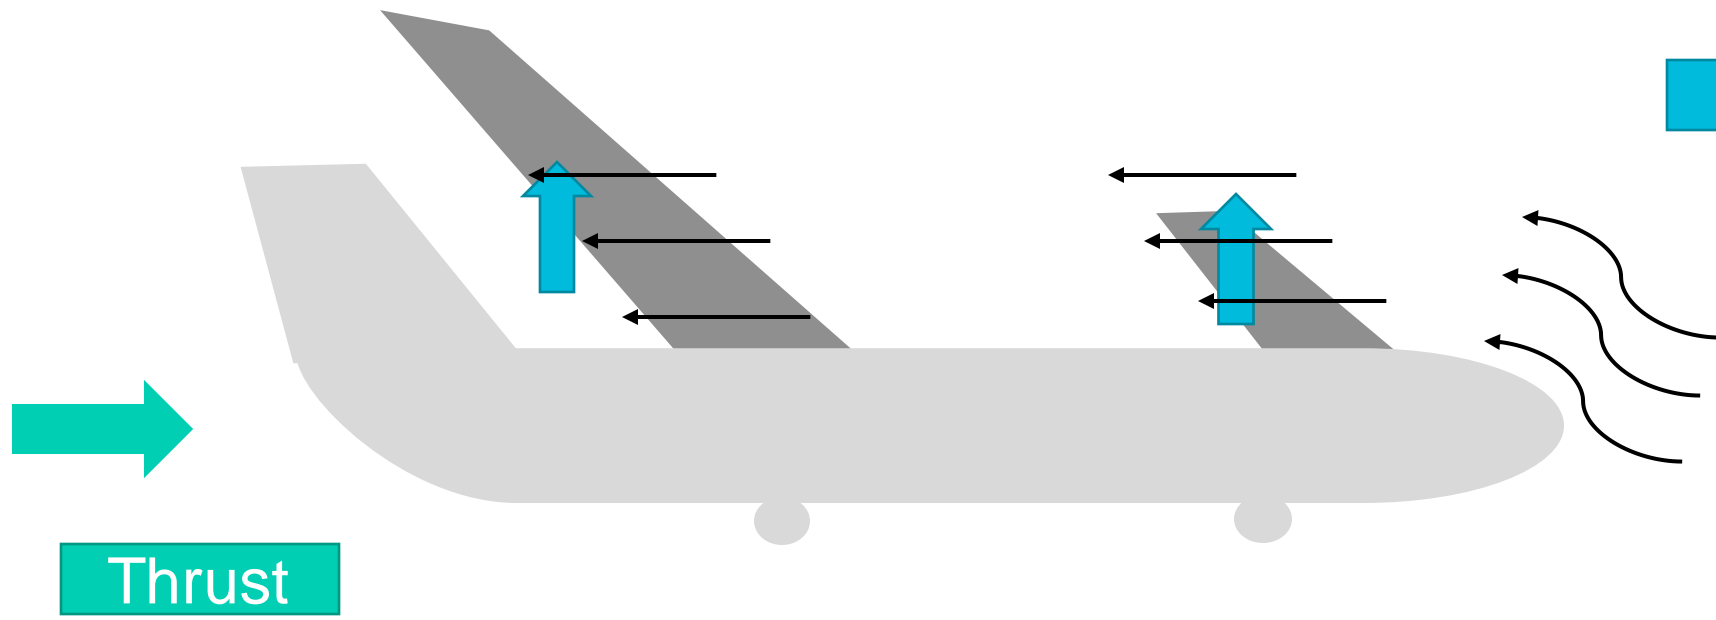


Thrust > Lift

Presenter: SP

Criteria Comparison - AHP

Lift vs Control Surface

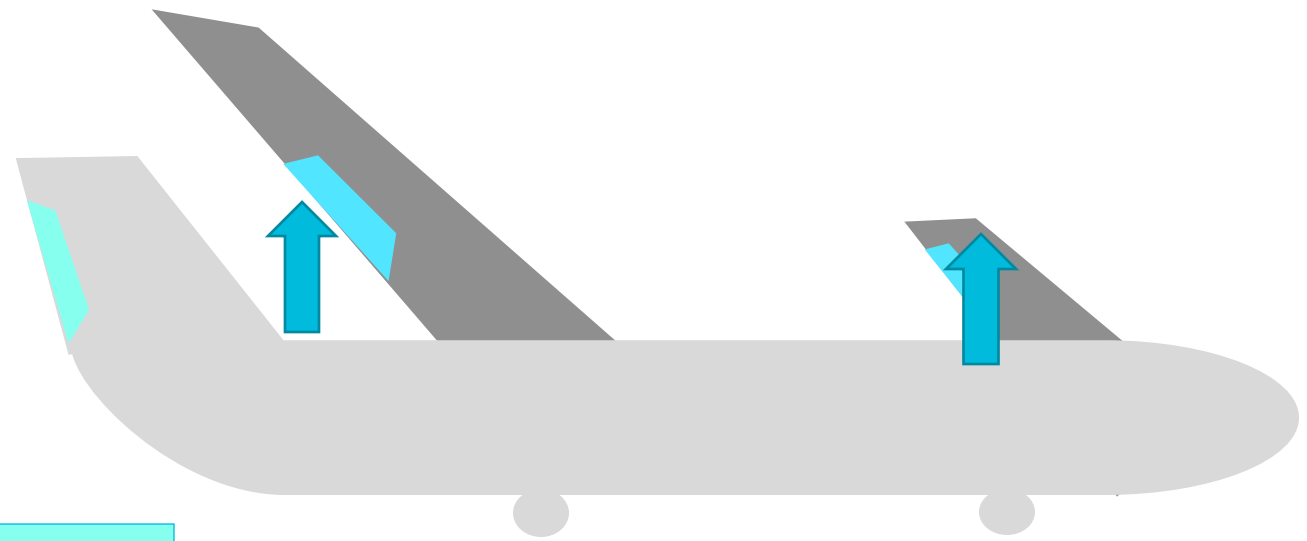

Lift

Rudder


Elevators/Ailerons

Lift > Control Surface

Presenter: SP

Criteria Comparison - AHP

Thrust vs
Control Surface

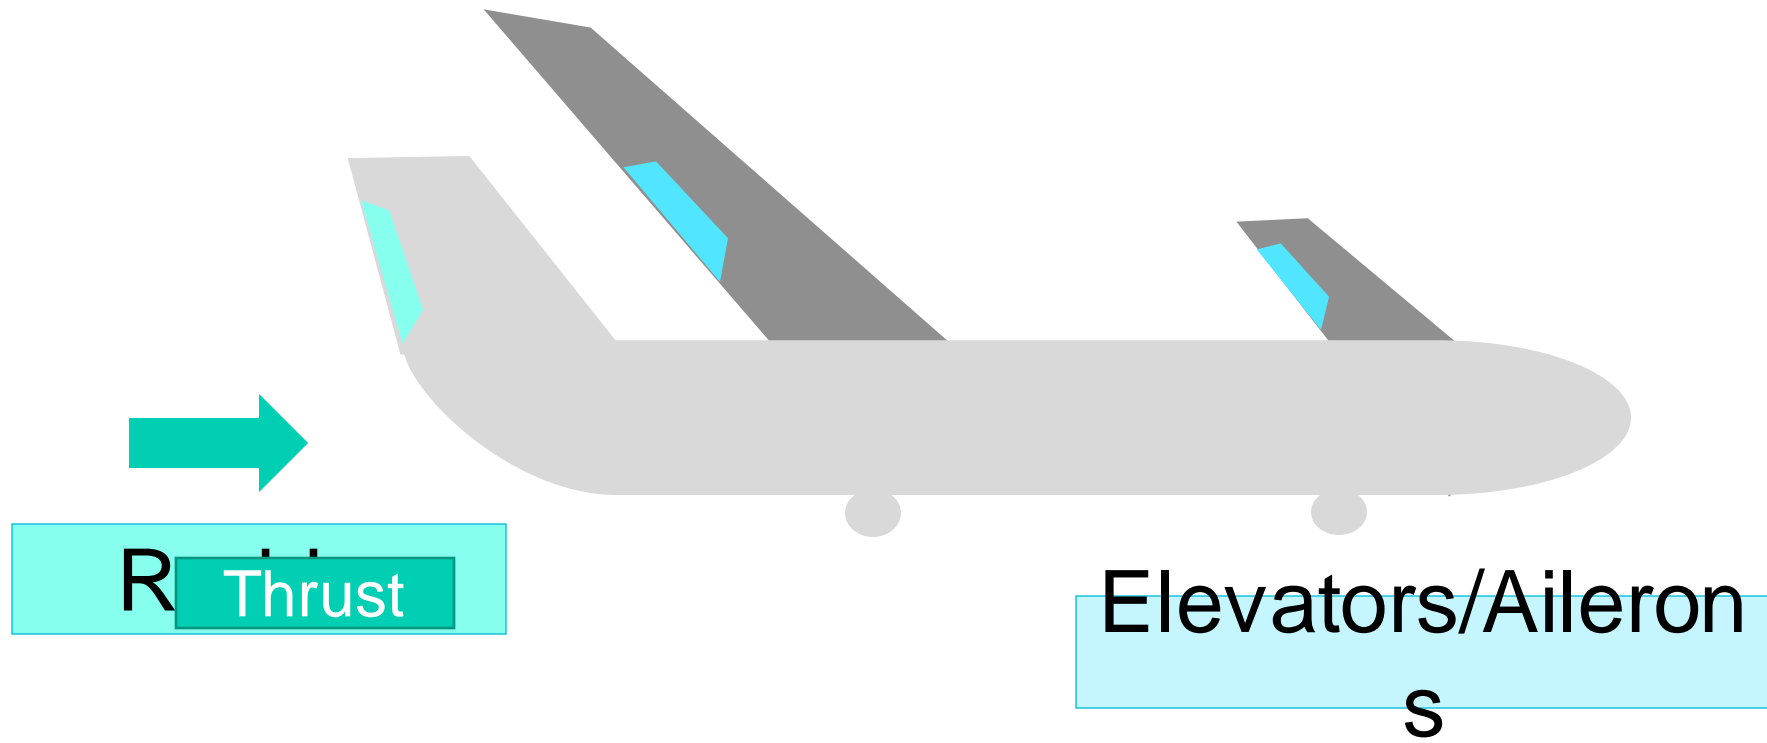


Thrust > Control Surface

Presenter: SP



3. Rutan Quickie Q2

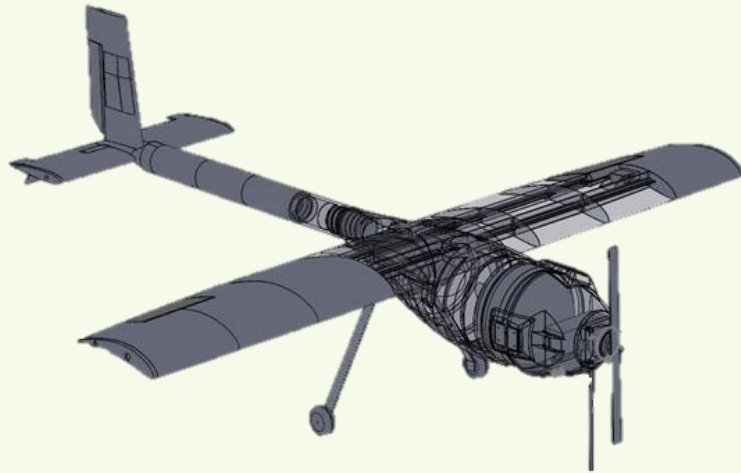

1. Boomtown


Concepts Considered for AHP



6. OMAC Laser 300

Presenter: SP

Lift Comparison for Concepts - AHP

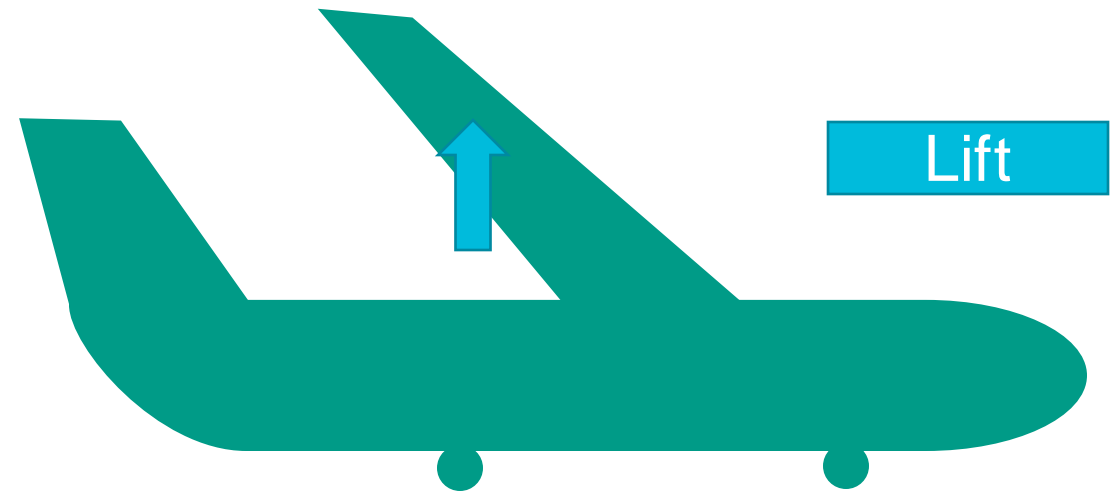


Concept 1: Boomtown

Just the main wing

Presenter: SP

Lift Comparison for Concepts - AHP

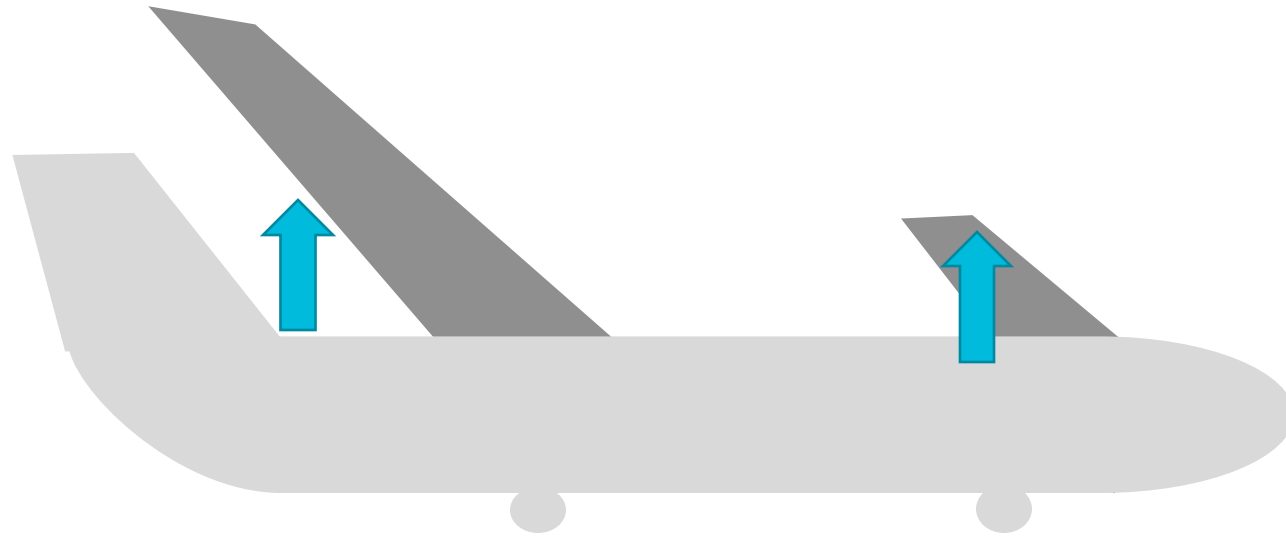


Lift

Canard + Main
Wing

Concept 3: Rutan Quickie
Q2

Presenter: SP

Lift Comparison for Concepts - AHP

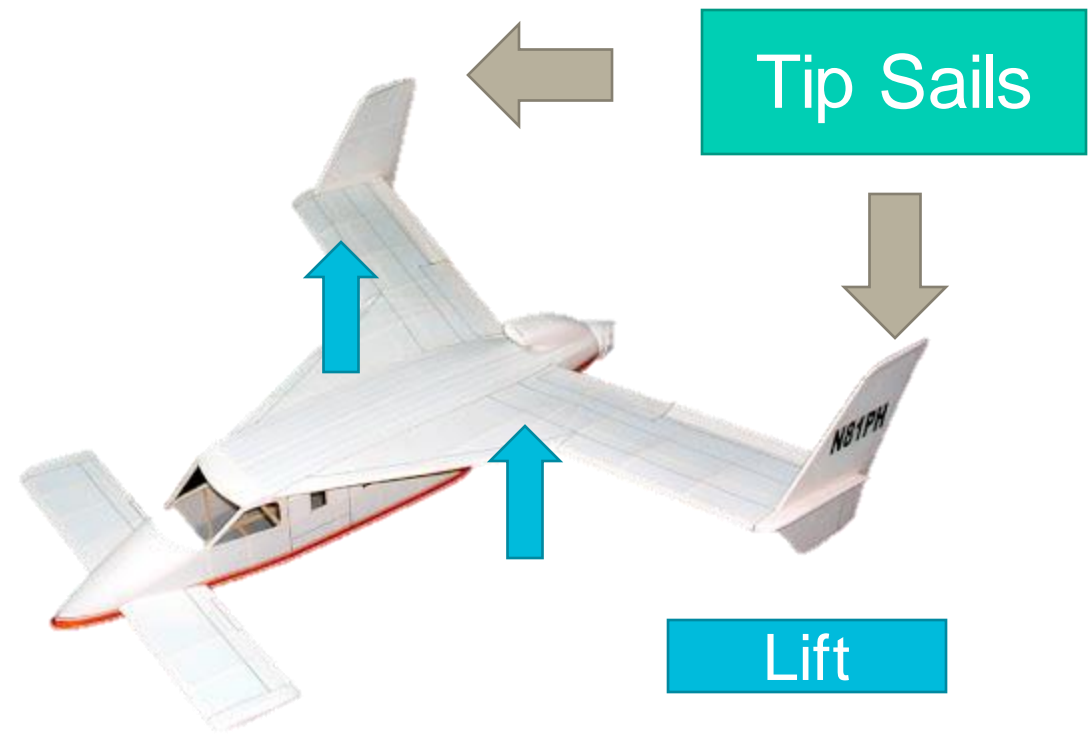

Concept 6: OMAC 300 Laser Plane

Lower Wingspan
+ Delta Restriction

Presenter: SP

Lift Comparison Matrix - AHP

Comparison for All Criteria
 Thrust CSM Weight Joint Strength



Lift Comparison			
	Concept 1	Concept 3	Concept 6
Concept 1	1.00	0.33	3.00
Concept 3	3.00	1.00	7.00
Concept 6	0.33	0.14	1.00
Sum	4.33	1.48	11.00



1



3




6

λ	CI	CR
Average Consistency	Consistency Index	Consistency Ratio
3.00703	0.00352	0.00676

CR < 0.1

Presenter: SP

Concept Comparison- AHP

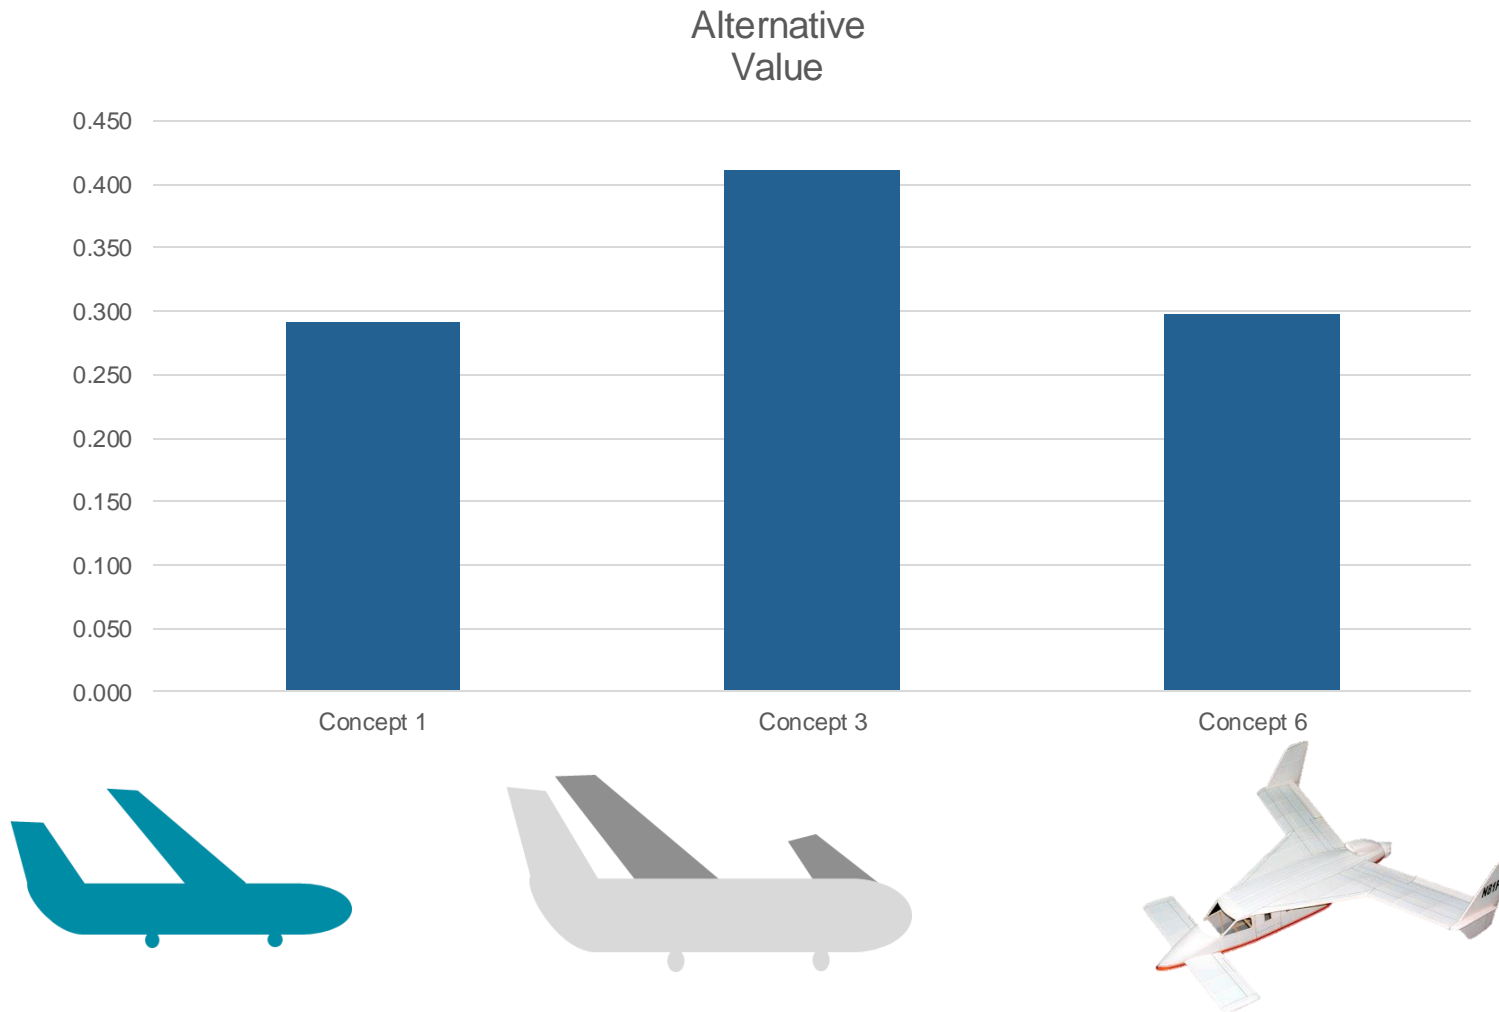

Presenter: SP

Criteria Comparison Matrix

Development of a Candidate set of Criteria Weights {W}

Criteria Comparison Matrix

	Lift	Thrust	Control Surface Movement	Weight	Joint Strength
Lift	1.00	0.33	3.00	9.00	9.00
Thrust	3.00	1.00	3.00	9.00	9.00
Control Surface Movement	0.33	0.33	1.00	5.00	3.00
Weight	0.11	0.11	0.20	1.00	0.11
Joint Strength	0.11	0.11	0.33	9.00	1.00
Sum	4.56	1.89	7.53	33.00	22.11

Normalized Comparison Matrix

Normalized Criteria Comparison Matrix [NormC]						
Criteria Comparison Matrix						
	Lift	Thrust	Control Surface Movement	Weight	Joint Strength	Criteria Weight
Lift	0.22	0.18	0.40	0.27	0.41	0.295
Thrust	0.66	0.53	0.40	0.27	0.41	0.453
Control Surface Movement	0.07	0.18	0.13	0.15	0.14	0.134
Weight	0.02	0.06	0.03	0.03	0.01	0.029
Joint Strength	0.02	0.06	0.04	0.27	0.05	0.089
Sum	1.00	1.00	1.00	1.00	1.00	1.000



Criteria Comparison Consistency Check

Consistency Check		
$\{Ws\}=[C]\{W\}$ Weighted Sum Vector	$\{W\}$ Criteria Weights	$Con=\{Ws\}./\{W\}$ Consistency Vector
1.911	0.490	3.899
2.802	0.230	12.184
0.796	0.140	5.683
0.149	0.040	3.720
0.478	0.100	4.780

λ Average Consistency	CI Consistency Index	CR Consistency Ratio
6.053	0.027	0.051



AHP – Lift Tables



Lift Comparison Matrix

Lift Comparison			
	Concept 1	Concept 3	Concept 6
Concept 1	1.00	0.33	3.00
Concept 3	3.00	1.00	7.00
Concept 6	0.33	0.14	1.00
Sum	4.33	1.48	11.00



Normalized Lift Comparison Matrix

Normalized Criteria Comparison Matrix [NormC]				
	Concept 1	Concept 2	Concept 6	Criteria Weight
Concept 1	0.231	0.226	0.273	0.243
Concept 2	0.692	0.677	0.636	0.669
Concept 6	0.077	0.097	0.091	0.088
Sum	1.000	1.000	1.000	1.000



Lift Consistency Check

Consistency Check 1		
$\{W_s\}=[C]\{W\}$ Weighted Sum Vector	$\{W\}$ Criteria Weights	$Con=\{W_s\}./\{W\}$ Consistency Vector
0.731	0.243	3.005
2.015	0.669	3.014
0.265	0.088	3.002

λ Average Consisten cy	CI Consisten cy Index	CR Consistenc y Ratio
3.00703	0.00352	0.00676



AHP – Thrust Tables



Thrust Comparison

Thrust Comparison			
	Concept 1	Concept 3	Concept 6
Concept 1	1.00	1.00	1.00
Concept 3	1.00	1.00	1.00
Concept 6	1.00	1.00	1.00
Sum	3.00	3.00	3.00



Normalized Thrust Comparison Matrix

Normalized Criteria Comparison Matrix [NormC]				
	Concept 1	Concept 2	Concept 6	Criteria Weight
Concept 1	0.333	0.333	0.333	0.333
Concept 2	0.333	0.333	0.333	0.333
Concept 6	0.333	0.333	0.333	0.333
Sum	1.000	1.000	1.000	1.000



Thrust Consistency Check

Consistency Check 2		
$\{Ws\}=[C]\{W\}$ Weighted Sum Vector	$\{W\}$ Criteria Weights	$Con=\{Ws\}./\{W\}$ Consistency Vector
1.000	0.333	3.000
1.000	0.333	3.000
1.000	0.333	3.000

λ Average Consistency y	CI Consisten cy Index	CR Consistenc y Ratio
3.00000	0.00000	0.00000



AHP – Control Surface Movement Tables



Control Surface Comparison Matrix

Control Surface Movement Comparison			
	Concept 1	Concept 3	Concept 6
Concept 1	1.00	3.00	0.20
Concept 3	0.33	1.00	0.20
Concept 6	3.00	5.00	1.00
Sum	4.33	9.00	1.40



Normalized Control Surface Comparison Matrix

Normalized Criteria Comparison Matrix [NormC]				
	Concept 1	Concept 2	Concept 6	Criteria Weight
Concept 1	0.231	0.333	0.143	0.236
Concept 2	0.077	0.111	0.143	0.110
Concept 6	0.692	0.556	0.714	0.654
Sum	1.000	1.000	1.000	1.000



Control Surface Consistency Check

Consistency Check 3		
$\{Ws\}=[C]\{W\}$ Weighted Sum Vector	$\{W\}$ Criteria Weights	$Con=\{Ws\}./\{W\}$ Consistency Vector
0.697	0.236	2.959
0.320	0.110	2.898
1.912	0.654	2.924

λ Average Consistency	CI Consistency Index	CR Consistency Ratio
2.92716	-0.03642	-0.07004



AHP – Weight Tables



Weight Comparison Matrix

Weight Comparison			
	Concept 1	Concept 3	Concept 6
Concept 1	1.00	0.33	3.00
Concept 3	3.00	1.00	5.00
Concept 6	0.33	0.20	1.00
Sum	4.33	1.53	9.00



Normalized Weight Comparison Matrix

Normalized Criteria Comparison Matrix [NormC]				
	Concept 1	Concept 2	Concept 6	Criteria Weight
Concept 1	0.231	0.217	0.333	0.260
Concept 2	0.692	0.652	0.556	0.633
Concept 6	0.077	0.130	0.111	0.106
Sum	1.000	1.000	1.000	1.000



Weight Consistency Check

Consistency Check 4		
$\{Ws\}=[C]\{W\}$ Weighted Sum Vector	$\{W\}$ Criteria Weights	$Con=\{Ws\}./\{W\}$ Consistency Vector
0.790	0.260	3.033
1.946	0.633	3.072
0.320	0.106	3.011

λ Average Consistency y	CI Consistency Index	CR Consistency Ratio
3.03871	0.01936	0.03723



AHP – Joint Strength Tables

From Team 508



Joint Strength Comparison Matrix (508)

Joint Strength Comparison			
	Concept 1	Concept 3	Concept 6
Concept 1	1.00	1.00	1.00
Concept 3	1.00	1.00	1.00
Concept 6	1.00	1.00	1.00
Sum	3.00	3.00	3.00



Normalized Joint Comparison Matrix (508)

Normalized Criteria Comparison Matrix [NormC]				
	Concept 1	Concept 2	Concept 6	Criteria Weight
Concept 1	0.333	0.333	0.333	0.333
Concept 2	0.333	0.333	0.333	0.333
Concept 6	0.333	0.333	0.333	0.333
Sum	1.000	1.000	1.000	1.000



Joint Strength Consistency Check(508)

Consistency Check 5		
$\{Ws\}=[C]\{W\}$ Weighted Sum Vector	$\{W\}$ Criteria Weights	$Con=\{Ws\}./\{W\}$ Consistency Vector
1.000	0.333	3.000
1.000	0.333	3.000
1.000	0.333	3.000

λ Average Consistency	CI Consistency Index	CR Consistency Ratio
3.00000	0.00000	0.00000




Final Rating



Final Rating Matrix


Final Rating Matrix			
Selection Criteria	Concept 1	Concept 2	Concept 6
Lift	0.243	0.669	0.088
Thrust	0.333	0.333	0.333
Control Surface Movement	0.236	0.110	0.654
Weight	0.260	0.633	0.106
Joint Strength	0.333	0.333	0.333

Concept	Alternative Value
Concept 1	0.292
Concept 3	0.411
Concept 6	0.297

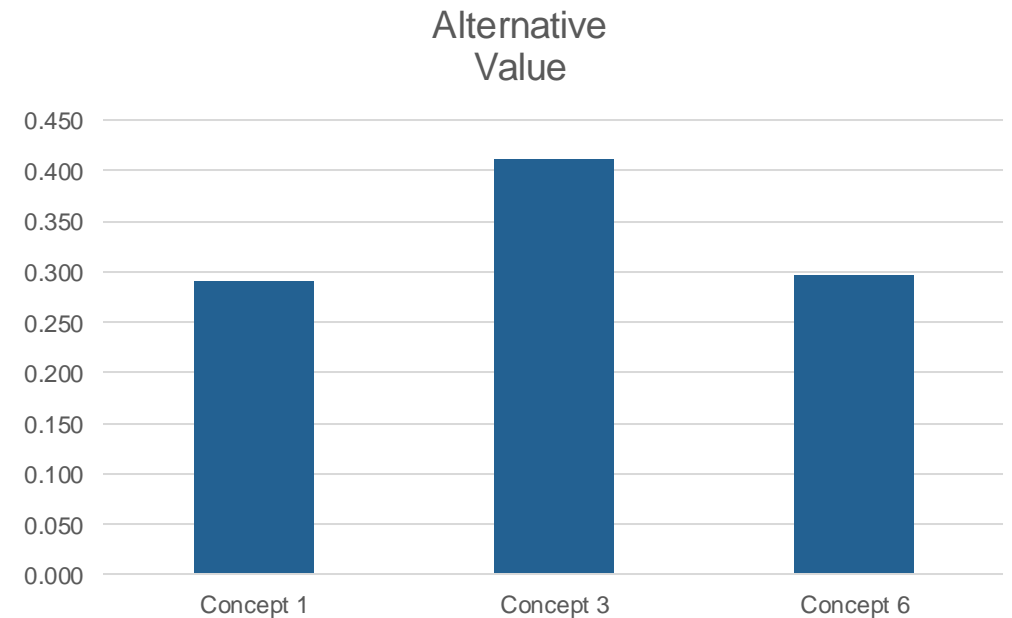


Redesigned Plane Analysis

CFD

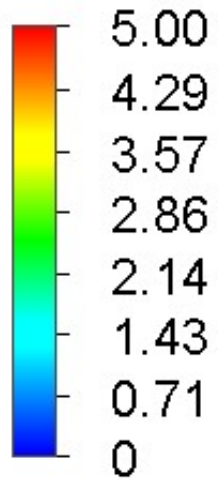

Turbulence Intensity [%]

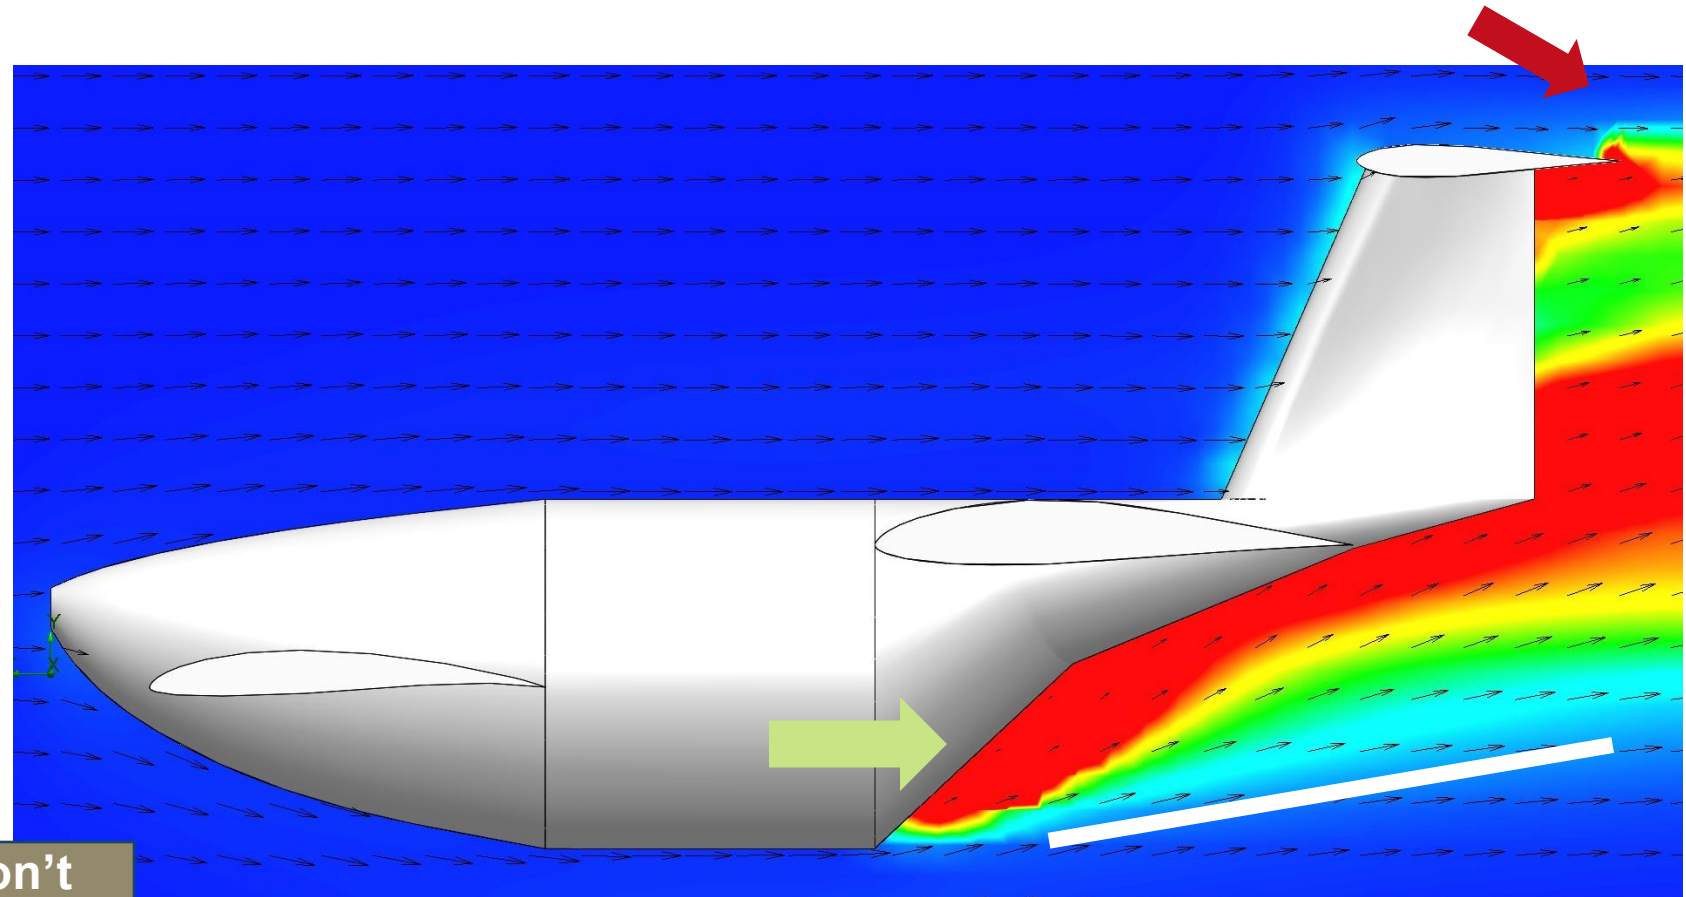


Tail Turbulence – Won't affect flight

Adrian Moya


Payload Prediction

Assuming Constant Temperature

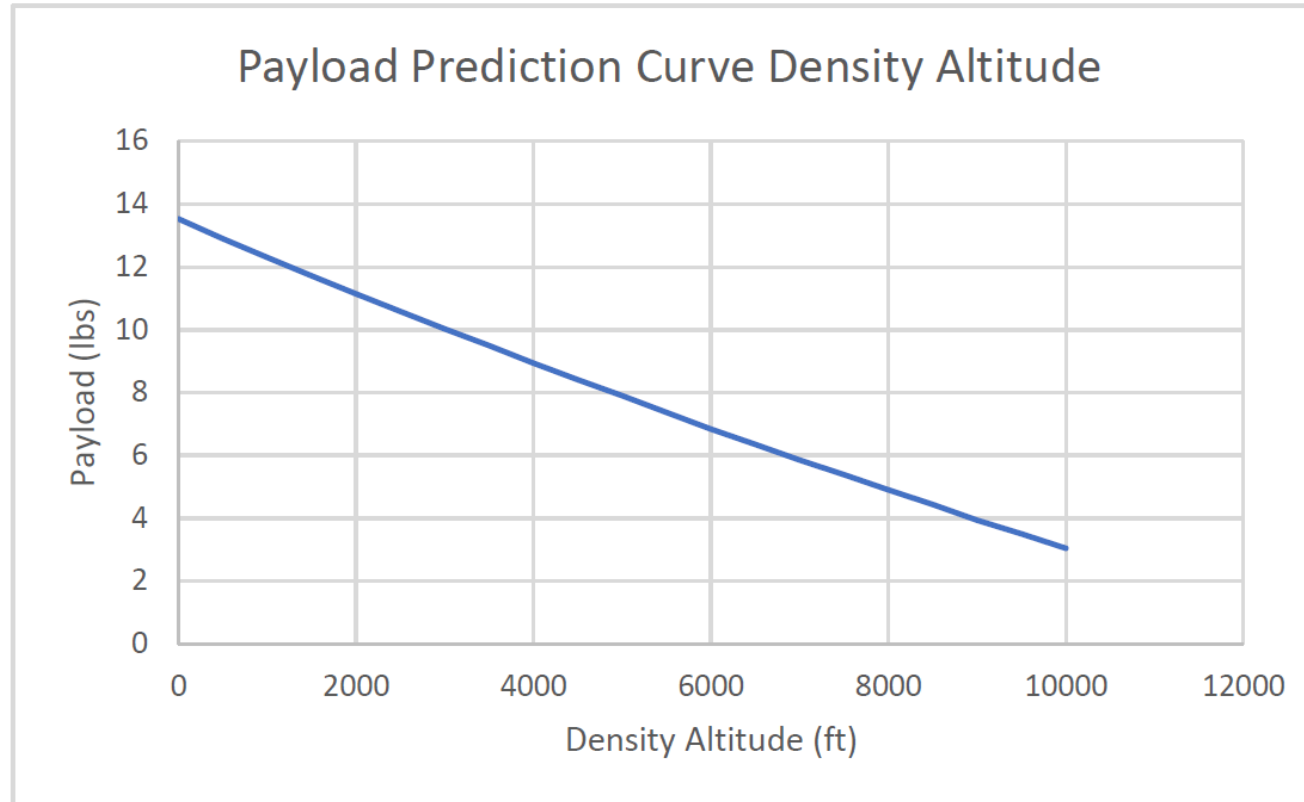

Stability

Stability Plot – No Tail

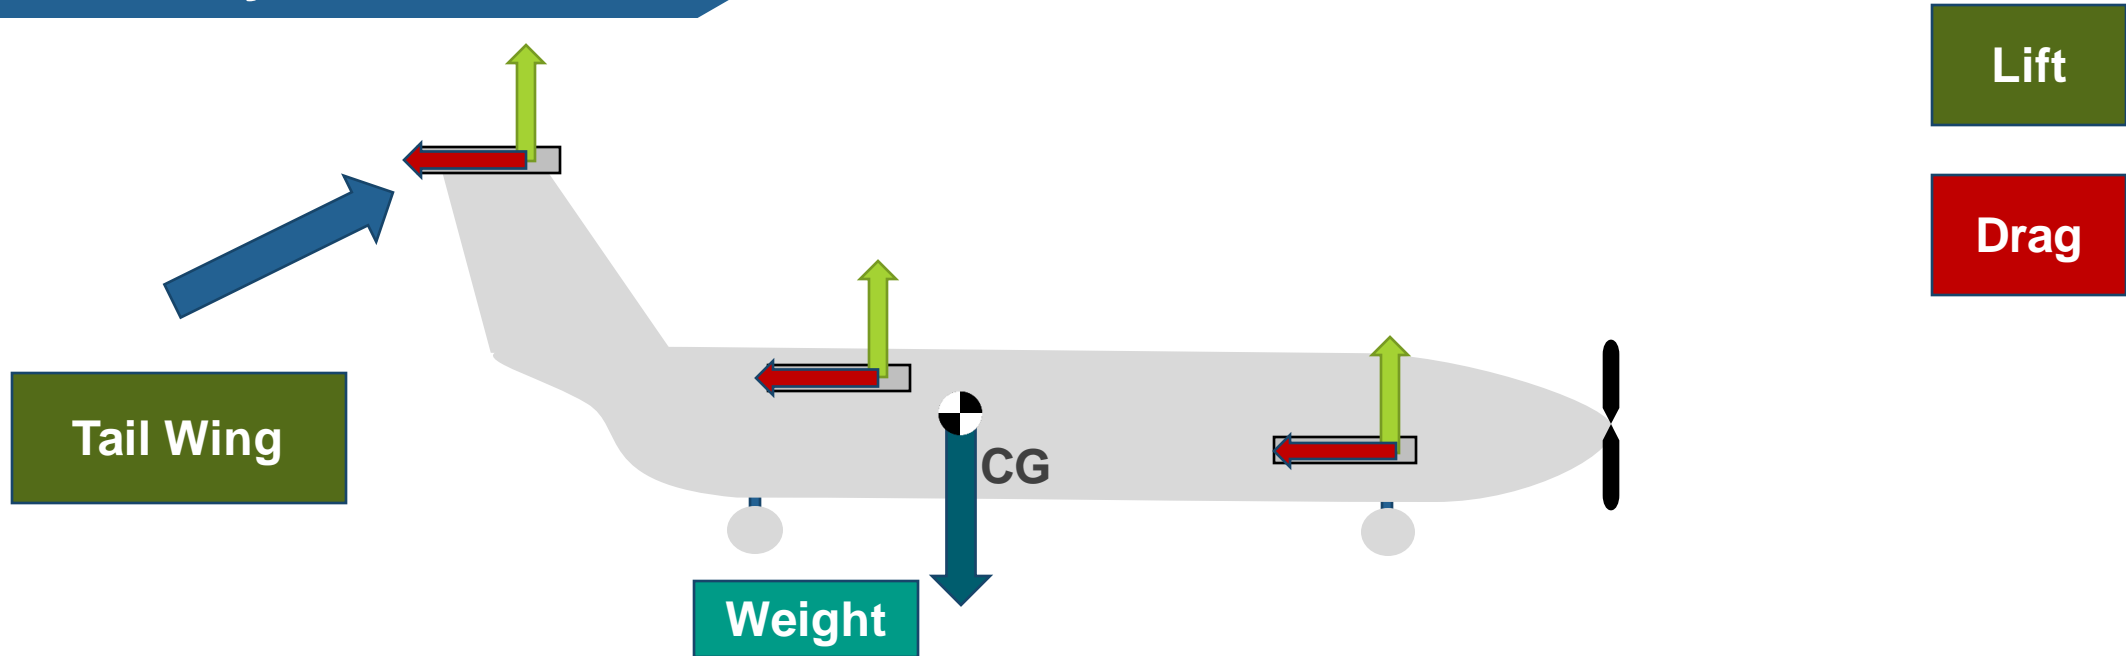


```
%Moment about CG
M_CG=L_c*x_c + L_c.*(alphaR).*y_c - D_c*y_c + D_c.*(alphaR).*x_c - L_a*x_a - L_a.*alphaR.*y_a...
+ D_a*y_a - D_a.*alphaR.*x_a - L_t*x_t - L_t.*alphaR.*y_t + D_t*y_t-D_t.*alphaR.*x_t...
+ M_AC_C + M_AC_M + M_AC_T;

%Coefficient of Moment about CG
C_M_CG = M_CG./(q*S_aft*Chord_aft);
```

Stability


Stability Plot – No Tail

No positive
Equilibrium

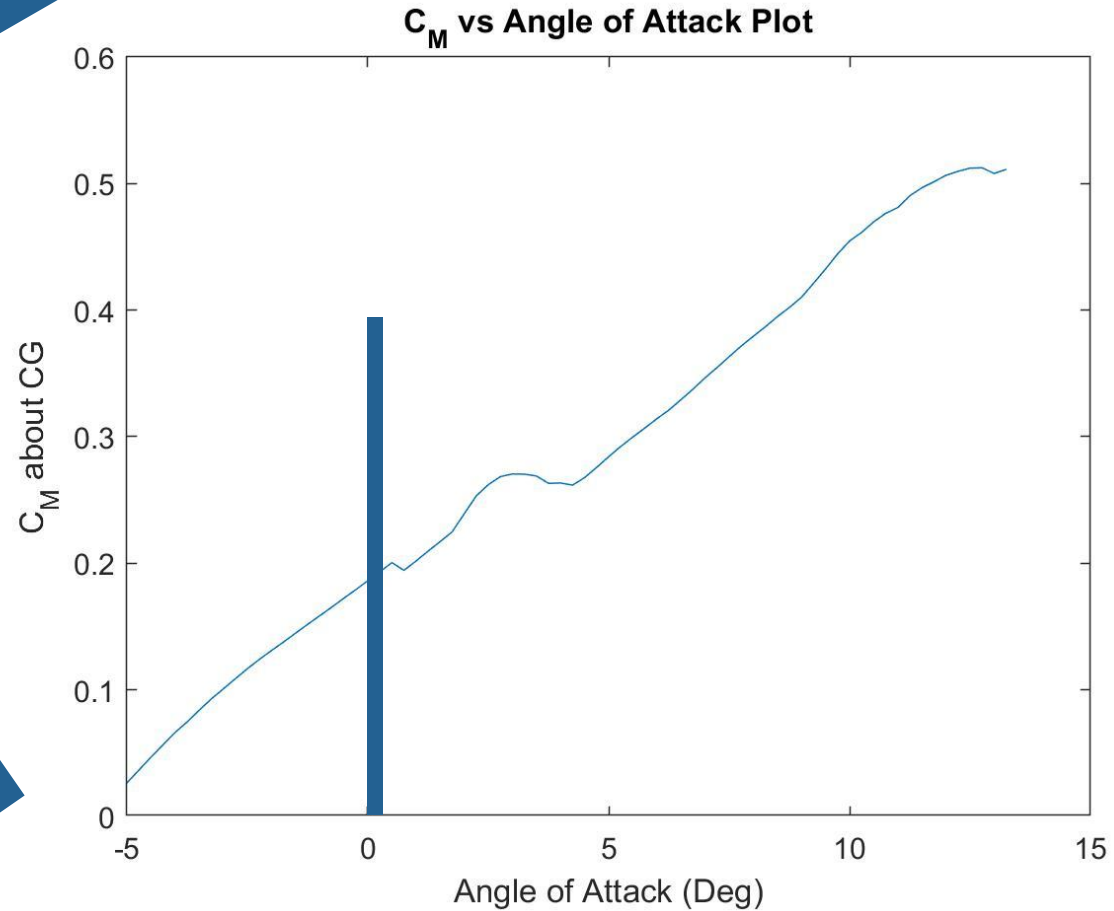

Stability

Stability Plot

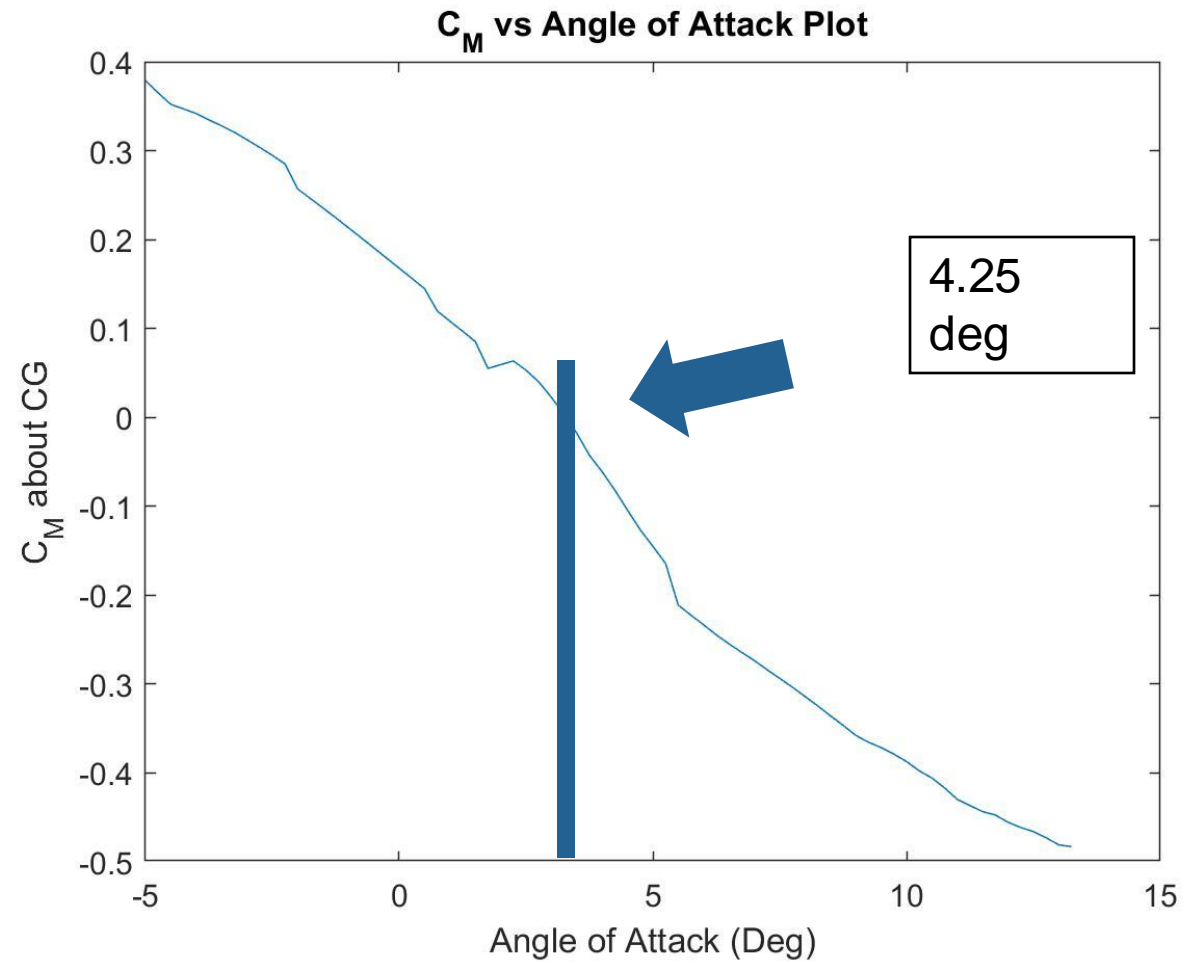

Stability

Neutral Point

