

### 1 7.36, §1 Asked

**Asked:** Find the horizontal perturbation velocity in a supersonic flow above a membrane overlaying a compressible variable medium.



# 2 7.36, §2 PDE Model

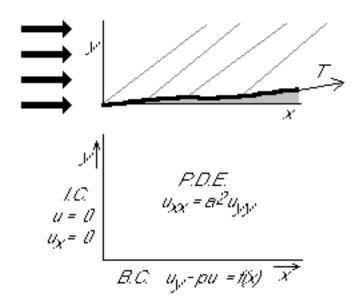

- Domain  $\bar{\Omega}$ :  $0 \le x < \infty, 0 \le y < \infty$
- Unknown horizontal perturbation velocity u = u(x, y)
- Hyperbolic
- Two homogeneous initial conditions

- One mixed boundary condition at y=0 and a regularity constraint at  $y=\infty$
- Constant  $a = \tan \mu$ , where  $\mu$  is the Mach angle.

Try a Laplace transform. The physics and the fact that Laplace transforms like only initial conditions suggest that x is the one to be transformed. Variable x is our "time-like" coordinate.

#### 3 7.36, §3 Transform

Transform the PDE:

$$u_{xx} = a^2 u_{yy} \xrightarrow{\text{Table 6.3, } \# 3} s^2 \hat{u} - \frac{su(0, y)}{u_x(0, y)} = a^2 \hat{u}_{yy}$$

Transform the BC:

$$u_y - pu = f(x)$$
  $\Longrightarrow$   $\hat{u}_y - p\hat{u} = \hat{f}(s)$ 

### 4 7.36, §4 Solve

Solve the PDE, again effectively a constant coefficient ODE:

$$s^{2}\hat{u} = a^{2}\hat{u}_{yy}$$
 
$$s^{2} = a^{2}k^{2} \implies k = \pm s/a$$
 
$$\hat{u} = Ae^{sy/a} + Be^{-sy/a}$$

Apply the BC at  $y = \infty$ :

$$A = 0$$

Apply the BC at y = 0:

$$\hat{u}_y - p\hat{u} = \hat{f} \implies -\frac{s}{a}B - pB = \hat{f}$$

Solving for B and plugging it into the expression for  $\hat{u}$  gives:

$$\hat{u} = -\frac{a\hat{f}}{s+ap}e^{-sy/a}$$

#### 5 7.36, §5 Back

We need to find the original to

$$\hat{u} = -\frac{a}{s+ap}\hat{f}e^{-sy/a}$$

Looking in the tables:

$$\frac{1}{s+ap} \quad \xrightarrow{\text{Table 6.4, } \# 3} \quad e^{-apx}$$


The other factor is a shifted function f, restricted to the interval that its argument is positive:

$$e^{-sy/a}\hat{f} \xrightarrow{\text{Table 6.3, } \# 6} \bar{f}\left(x - \frac{y}{a}\right)$$

With the bar, I indicate that I only want the part of the function for which the argument is positive. This could be written instead as

$$f\left(x-\frac{y}{a}\right)H\left(x-\frac{y}{a}\right)$$

where the Heaviside step function H(x) = 0 if x is negative and 1 if it is positive.




Use convolution, Table 6.3, # 7. again to get the product.

$$u(x,y) = -\int_0^x a\bar{f}\left(\xi - \frac{y}{a}\right)e^{-ap(x-\xi)}\,\mathrm{d}\xi$$

This *must* be cleaned up. I do not want bars or step functions in my answer.

I can do that by restricting the range of integration to only those values for which  $\bar{f}$  is nonzero.

(Or H is nonzero, if you prefer)




Two cases now exist:

$$u(x,y) = -\int_{y/a}^{x} af\left(\xi - \frac{y}{a}\right) e^{-ap(x-\xi)} d\xi \qquad (x > \frac{y}{a})$$
$$u(x,y) = 0 \qquad (x < \frac{y}{a})$$

It is neater if the integration variable is the argument of f. So, define  $\phi = \xi - y/a$  and convert:

$$u(x,y) = -\int_0^{x-y/a} af(\phi) e^{-apx+py+ap\phi} d\phi \qquad (x > \frac{y}{a})$$
$$u(x,y) = 0 \qquad (x < \frac{y}{a})$$

This allows me to see which physical f values I actually integrate over when finding the flow at an arbitrary point:



# 6 7.36, §6 Alternate

An alternate solution procedure is to define a new unknown:

$$v \equiv u_y - pu$$

You must derive the problem for v:

The boundary condition is simply:


$$v(x,0) = f(x)$$

To get the PDE for v, use

$$\frac{\partial [PDE]}{\partial y} - p[PDE] \quad \Longrightarrow \quad v_{tt} = a^2 v_{xx}$$

Similarly, for the initial conditions:

$$\frac{\partial [ICs]}{\partial y} - p[ICs] \implies v(0,y) = v_x(0,y) = 0$$



After finding v, I still need to find u from the definition of v:

$$v \equiv u_y - pu$$

Where do you get the integration constant??